

07/25/00
JC846 U.S. PTO

04-26-00

A

Atty. Docket No. JP9-1999-0154US1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Application Transmittal

Assistant Commissioner of Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the **Patent Application** of:

Inventor: K. Zettsu, et al

For: Method and Apparatus for Fixing Display Information

Enclosed are:

- ☒ Thirty-nine (39) sheets of drawings.
- ☒ An assignment of the invention to International Business Machines Corporation, Armonk, New York 10504.
- ☒ A certified copy of a Japanese application, serial number 11-230537, filed 8/17/99..
- ☒ An associate power of attorney.
- ☒ Declaration and Power of Attorney for Patent Application

The filing fee has been calculated as shown below:

(Col. 1)

(Col. 2)

Other Than Small Entity

For:	No. Filed	No. Extra
Basic Fee		
Total Claims	14-20 =	0
Indep. Claims	14-3 =	11
<input type="checkbox"/> Multiple Dependent Claim Presented		

Rate	Fee
	\$690.00
x \$18.00=	\$.00
x \$78.00=	\$858.00
\$260.00	\$.00
Subtotal	\$1548.00
\$130.00	\$.00
TOTAL	\$1548.00

Surcharge-Late Filing Fee or Oath or Declaration

Deposit Account Authorization

- ☒ Please charge Deposit Account No. 09-0461 in the amount of \$1548. A duplicate copy of this sheet is enclosed.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 09-0461. A duplicate copy of this sheet is enclosed.
 - ☒ Any additional filing fees required under 37 C.F.R. §1.16.
 - ☒ Any patent application processing fees under 37 C.F.R. §1.17.

Date: July 25, 2000

Respectfully submitted,

By A. Bruce Clay
A. Bruce Clay
Attorney of Record
Registration No. 32,121
IBM Corporation
Intellectual Property Law
Dept. T81/Bldg. 062
P.O. Box 12195
Research Triangle Park, NC 27709
Telephone: 919-254-6717
Fax: 919-254-4330

EXPRESS MAIL CERTIFICATE

Express Mail Label Number: EK873466991US
Date: July 25, 2000

I hereby certify that I am depositing the enclosed or attached paper with the U.S. Postal Service "Express Mail Post Office to Addressee" service on the above date, addressed to the Assistant Commissioner of Patents, Washington, D.C. 20231.

Catherine M. Robbins
Catherine M. Robbins

JC864 U.S. PTO
09/625298
07/25/00

Docket No. JP9-1999-0154US1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: K. Zettsu, et al

Serial No.: Group No.:

Filed: Herewith

For: Method and Apparatus for Fixing Display Information



Assistant Commissioner of Patents
Washington, D.C. 20231

EXPRESS MAIL CERTIFICATE

"Express Mail" label number: EK873466991US

Date of Deposit: July 25, 2000

WE REQUEST THE DATE OF DEPOSIT AS THE DATE FILED.

I hereby certify that the following **attached** correspondence comprising:

1. Patent Application Transmittal (In duplicate)
2. Declaration and Power of Attorney
3. Recordation and Assignment
3. Patent Application (61 pages)
4. Drawings (39 sheets)
5. Certified Copy of Japanese Application, Serial No. 11-230537, filed 8/17/99.
5. Business Reply Post Card

is being deposited with the United States Postal Service Express Mail Post Office to Addressee service under CFR 1.10 on the date indicated above and is addressed to:

**Assistant Commissioner of Patents
Washington, D.C. 20231**

Catherine M. Robbins
(Name of person mailing paper or fee)


(Signature of person mailing paper or fee)

METHOD AND APPARATUS FOR FIXING DISPLAY INFORMATION

Field of the Invention

The present invention relates to a system for dynamically controlling the form of information displayed on a web browser, and in more detail relates to a system for dynamically controlling the form of data to be embedded into a page template.

Background of the Invention

Known techniques can choose information that is less likely to be changed in an HTML template and embed information more likely to be changed into this template for displaying as disclosed in the Published Unexamined Patent Application Nos. 10-198596, 11-85727, 10-334086 and 11-66152.

However, such techniques have adopted a system, as illustrated in Figure 43, of selecting data to be embedded into the template, to designate the accessing method, to designate the layout, to designate the data format, and the like, under a CGI program. An alternative system, as shown in Figure 44, embeds a program (such as JavaBeans), to accesses prescribed data, displays them in a prescribed form, and incorporates them data into the template.

Such a CGI program (or JavaBean), in which database names, file names, and the like are described in a fixed manner, required the occurrence of a workload to modify the CGI program or to replace the JavaBeans with new ones when it was desired to incorporate information from another database, or of another file, into the template without altering the database or the contents of the file themselves. This makes it impossible to dynamically switch prescribed displayed

data. Additionally, the designer of a web page may be required to have knowledge of programming.

Especially when staging a campaign for various products with a web browser on the Internet. A campaign planner wants to be able to alter the contents or the layout according to the targeted customers' interest or to schedule without having to edit the HTML file or to modify the server program (such as CGI).

Furthermore, displaying contents strictly for a prescribed user, makes it possible to enhance advertising by communicating effective information, such as advertisements, that are based on the needs of that particular user, as well as to increase sales in electronic commerce.

Summary of the Invention

An object of the present invention is to provide a system permitting alteration of the contents or layout to be embedded into a page template without having to edit the HTML file or modify the server program such as CGI.

Another object of the invention is to provide a system permitting dynamic alteration of the contents or layout to be embedded into a page template according to the situation at the time of accessing by a user.

Another object of the invention is to provide a versatile and low cost system permitting information on contents and layout to be embedded into a page template to be diverted to another page template.

Another object of the invention is to provide a system permitting, on the basis of the behavior of a user having used Internet, information fitting that particular user's

taste and behavioral pattern to be supplied only to the user or a group including that user.

Another object of the invention is to provide a system reduced in resources required at the time of execution.

- 5 According to one aspect of the present invention, a page template which would serve as the prototype of a web page contains formatter specifying information and display attribute information. This formatter specifying information is information to specify one out of a plurality of kinds of
10 formatters (banner, Telop, a plurality of banners arrangement, and the like). Display attribute information is information for controlling the moves of this formatter. When a page template is called by a web browser, this formatter is actuated and effects such controls as selecting,
15 arranging, and determining the displaying sequence and time of the contents to be embedded into the template according to the display attributes, or reducing the display area (the area made available in the template for embedding the contents) to the size of the contents.
- 20 According to another aspect of the invention, there is provided a display information fixing method to be executed on a display information fixing apparatus for transmitting page information to an information terminal having a display screen and an input unit, comprising the steps of:
- 25 (a) analyzing a page template specified by a display information acquisition request from the information terminal,
- (b) acquiring formatter specifying information and display attribute information from the page template,
- 30 (c) acquiring a formatter on the basis of the formatter

specifying information, and

- (d) processing contents to be incorporated into the page template on the basis of the display attribute, and generating page information to be displayed on the display apparatus of the information terminal.

In the Claims of the specification under the present application, "formatter specifying information" is a concept covering information used for specifying a formatter, such as the path name, file name, database name, table name, and information to identify the type of formatter. "Contents" is a concept referring to parts registered correspondingly to display areas in an arrangement rule DB to be explained with reference to an embodiment to be described below, covering not only contents registered in parts whose display conditions have prescribed values but also contents specified by descriptions fixed by a path name and the like in display areas. And "processing" is a concept covering alteration of any content in size, shape, arrangement, background color, color of its own, and display method (such as being displayed while moving from right to left, or emerging in a grid form).

According to another aspect of the invention, there is provided a display information fixing method to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, comprising the steps of:

- (a) analyzing a page template specified by a display information acquisition request from the information terminal,
- (b) acquiring formatter specifying information and display attribute information from the page template,

(c) acquiring a formatter on the basis of the formatter specifying information,

(d) acquiring information on a plurality of contents to be displayed on the page template, and

5 (e) generating, if it is judged that the display attributes include one indicating rotation, page information including information on a first content among the plurality of contents and generating, after the lapse of a prescribed length of time, page information including
10 information on a second content among the plurality of contents.

According to another aspect of the invention, there is provided a display information fixing method to be executed on a display information fixing apparatus for transmitting
15 display information to an information terminal having a display screen and an input unit, comprising the steps of:

(a) analyzing a page template specified by a display information acquisition request from the information terminal,

20 (b) acquiring formatter specifying information and display attribute information from the page template,

(c) acquiring a formatter on the basis of the formatter specifying information,

(d) acquiring information on a plurality of contents to be
25 displayed on the page template, and

(e) excluding, if it is judged that the display attributes include one indicating random, information on a first content among the plurality of contents and generating

page information including information on a second content among the plurality of contents.

According to another aspect of the invention, there is provided a display information fixing method to be executed
 5 on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, comprising the steps of:

- 10 (a) analyzing a page template specified by a display information acquisition request from the information terminal,
- (b) acquiring formatter specifying information and display attribute information from the page template,
- (c) acquiring a formatter on the basis of the formatter specifying information,
- 15 (d) acquiring information on any content to be displayed on the page template,
- (e) acquiring size information on a display area predefined to display the content from the page template,
- 20 (f) comparing the size information on the display area with the size information on the acquired content, and
- (g) adjusting, if it is judged that the size information on the display area has a greater value than the size information on the acquired content and the display attributes include one to instruct adjusted displaying,
 25 the size of the display area to the size of the content and generating page information.

According to another aspect of the invention, there is

provided a display information fixing method to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, comprising the steps of:

- 5 (a) analyzing a page template specified by a display information acquisition request from the information terminal,
- (b) acquiring formatter specifying information and display attribute information from the page template,
- 10 (c) acquiring a formatter on the basis of the formatter specifying information,
- (d) searching for information on a content to be displayed on the page template,
- 15 (e) judging, if it is judged that there is no content to be displayed, whether or not information on default contents is defined in the page template, and
- (f) generating, if any information on default contents exists, page information including the information on default contents.

20 According to another aspect of the invention, there is provided a display information fixing method to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, comprising the steps of:

- 25 (a) analyzing a page template specified by a display information acquisition request from the information terminal,

(b) acquiring from the page template formatter specifying information and display attribute information on a formatter to control the arrangement of a plurality of contents,

5 (c) acquiring a formatter on the basis of the formatter specifying information,

(d) searching for information on a plurality of contents to be displayed on the page template, and

10 (e) generating page information on the arrangement of the contents on the basis of information indicating the direction of arrangement contained in the display attributes.

15 According to another aspect of the invention, there is provided a display information fixing apparatus for transmitting page information to an information terminal having a display screen and an input unit, comprising:

(a) an apparatus for analyzing a page template specified by a display information acquisition request from the information terminal,

20 (b) an apparatus for acquiring from the page template formatter specifying information and display attribute information,

(c) an apparatus for acquiring a formatter on the basis of the formatter specifying information, and

25 (d) an apparatus for processing, on the basis of the display attributes, contents to be incorporated into the page template and generating page information to be displayed on the display unit of the information terminal.

According to another aspect of the invention, there is provided a display information fixing apparatus for transmitting page information to an information terminal having a display screen and an input unit, comprising:

- 5 (a) an apparatus for analyzing a page template specified by a display information acquisition request from the information terminal,
- (b) an apparatus for acquiring formatter specifying information from the page template,
- 10 (c) an apparatus for acquiring a formatter on the basis of the formatter specifying information, and
- (d) an apparatus for transmitting a formatter, together with the page template, to the information terminal to process, on the basis of the display attributes, contents to be incorporated into the page template and
15 generating page information to be displayed on the display unit of the information terminal.

According to another aspect of the invention, there is provided a storage medium storing thereon a display
20 information fixing program to be executed on a display information fixing apparatus for transmitting page information to an information terminal having a display screen and an input unit, the program comprising:

- 25 (a) a program code for instructing analysis of a page template specified by a display information acquisition request from the information terminal,
- (b) a program code for instructing acquisition of formatter

specifying information and display attribute information from the page template,

(c) a program code for instructing acquisition of a formatter on the basis of the formatter specifying information, and

(d) a program code for instructing processing of contents to be incorporated into the page template on the basis of the display attributes and generation of page information to be displayed on the display apparatus of the information terminal.

According to another aspect of the invention, there is provided a storage medium storing thereon a display information fixing program to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, the program comprising:

(a) a program code for instructing analysis of a page template specified by a display information acquisition request from the information terminal,

(b) a program code for instructing acquisition of formatter specifying information and display attribute information from the page template,

(c) a program code for instructing acquisition of a formatter on the basis of the formatter specifying information,

(d) a program code for instructing acquisition of information on a plurality of contents to be displayed on the page template, and

- (e) a program code for instructing, if it is judged that the display attributes include one indicating rotation, generation of page information including information on a first content among the plurality of contents and, after the lapse of a prescribed length of time, generation of page information including information on a second content among the plurality of contents.

According to another aspect of the invention, there is provided a storage medium storing thereon a display information fixing program to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, the program comprising:

- (a) a program code for instructing analysis of a page template specified by a display information acquisition request from the information terminal,
- (b) a program code for instructing acquisition of formatter specifying information and display attribute information from the page template,
- (c) a program code for instructing acquisition of a formatter on the basis of the formatter specifying information,
- (d) a program code for instructing acquisition of information on a plurality of contents to be displayed on the page template, and
- (e) a program code for instructing exclusion, if it is judged that the display attributes include one indicating random, of information on a first content among the plurality of contents and generation of page

information including information on a second content among the plurality of contents.

According to another aspect of the invention, there is provided a storage medium storing thereon a display
5 information fixing program to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit,
the program comprising:

- 10 (a) a program code for instructing analysis of a page template specified by a display information acquisition request from the information terminal,
- (b) a program code for instructing acquisition of formatter specifying information and display attribute information
15 from the page template,
- (c) a program code for instructing acquisition of a formatter on the basis of the formatter specifying information,
- (d) a program code for instructing acquisition of
20 information on any content to be displayed on the page template,
- (e) a program code for instructing acquisition of size information on a display area predefined to display the content from the page template,
- 25 (f) a program code for instructing comparison of the size information on the display area with the size information on the acquired content, and
- (g) a program code for instructing, if it is judged that the

size information on the display area has a greater value than the size information on the acquired content and the display attributes include one to instruct adjusted displaying, adjustment of the size of the display area to the size of the content and for generating page information.

According to another aspect of the invention, there is provided a storage medium storing thereon a display information fixing program to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, the program comprising:

- (a) a program code for instructing analysis of a page template specified by a display information acquisition request from the information terminal,
- (b) a program code for instructing acquisition of formatter specifying information and display attribute information from the page template,
- (c) a program code for instructing acquisition of a formatter on the basis of the formatter specifying information,
- (d) a program code for instructing searching for information on a content to be displayed on the page template,
- (e) a program code for instructing, if it is judged that there is no content to be displayed, judgment of whether or not information on default contents is defined in the page template, and
- (f) a program code for instructing, if any information on default contents exists, generation of page information

including the information on default contents.

According to another aspect of the invention, there is provided a storage medium storing thereon a display information fixing program to be executed on a display
 5 information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, the program comprising:

(a) a program code for instructing analysis of a page
 10 template specified by a display information acquisition request from the information terminal,

(b) a program code for instructing acquisition of formatter
 specifying information and display attribute information on a formatter to control the arrangement of a plurality
 of contents from the page template,

15 (c) a program code for instructing acquisition of a formatter on the basis of the formatter specifying information,

(d) a program code for instructing searching for information
 20 on a plurality of contents to be displayed on the page template, and

(e) a program code for instructing generation of page
 information on the arrangement of the contents on the basis of information indicating the direction of
 arrangement contained in the display attributes.

25 Brief Description of the Drawings

For a more complete understanding of the present invention and for further advantages thereof, reference is now made to the following Detailed Description taken in conjunction with

the accompanying Drawings, inc which:

Figure 1 is a block diagram of one embodiment of hardware configuration of an information terminal, web server and client machine according to the present invention;

- 5 Figures 2A and 2B are a block diagram of processing elements in a preferred embodiment of the invention;

Figure 3 is a conceptual diagram illustrating the state transitions of parts in the preferred embodiment of the invention;

- 10 Figure 4 shows message flows in a contents registration procedure in the preferred embodiment of the invention;

Figure 5 shows message flows in a page template registration procedure in the preferred embodiment of the invention;

- 15 Figure 6 shows message flows in a formatter object registration procedure in the preferred embodiment of the invention;

Figure 7 is a conceptual diagram for describing a page template in the preferred embodiment of the invention;

- 20 Figures 8A and 8B show message flows in a part creation procedure in the preferred embodiment of the invention;

Figure 9 shows message flows in a part creation procedure in the preferred embodiment of the invention;

- 25 Figure 10 is a conceptual diagram illustrating the page designer's screen configuration in the preferred embodiment of the invention;

Figure 11 shows message flows in a parts arrangement procedure in the preferred embodiment of the invention;

Figure 12 shows message flows in a parts arrangement procedure in the preferred embodiment of the invention;

- 5 Figure 13 shows message flows in a procedure of adding parts to a display area in the preferred embodiment of the invention;

Figure 14 is a conceptual diagram of a part selection panel in the preferred embodiment of the invention;

- 10 Figure 15 shows message flows in a schedule definition procedure for arranged parts in the preferred embodiment of the invention;

Figure 16 shows message flows in a publishing decision procedure for contents to be embedded into a display area in the preferred embodiment of the invention;

- 15 Figures 17A and 17B show message flows in a generating procedure for contents to be embedded into a display area in the preferred embodiment of the invention;

- 20 Figure 18 shows message flows in a generating procedure for contents to be embedded into a display area in the preferred embodiment of the invention;

Figure 19 is a diagram illustrating one example of a code to define a display area in the preferred embodiment of the invention;

- 25 Figure 20 is a conceptual diagram of an arrangement rule DB in the preferred embodiment of the invention;

Figure 21 is a conceptual diagram of a component DB in the preferred embodiment of the invention;

Figure 22 shows message flows in a procedure of shaping contents by a formatter in the preferred embodiment of the invention;

Figure 23 is a conceptual diagram of a formatter in the preferred embodiment of the invention;

Figure 24 is a diagram illustrating one example of parameters to be set in a display area;

10 Figure 25 is a diagram for describing arrangement of parts in a display area;

Figure 26 is a flowchart of a formatter process where a standard banner form is designated in the preferred embodiment of the invention;

15 Figure 27 is a flowchart of a formatter process where a standard banner form is designated in the preferred embodiment of the invention;

Figure 28 is a diagram illustrating one example of parameters to be set in a display area;

20 Figure 29 is a diagram for describing arrangement of parts in a display area;

Figure 30 is a diagram for describing arrangement of parts in a display area;

25 Figure 31 is a flowchart of a formatter process where a banner flow form is designated in the preferred embodiment of the invention;

Figure 32 is a flowchart of a formatter process where a banner flow form is designated in the preferred embodiment of the invention;

5 Figure 33 is a conceptual diagram for describing creation of an array of parts in the preferred embodiment of the invention;

Figure 34 is a conceptual diagram for describing creation of an array of parts in the preferred embodiment of the invention;

10 Figure 35 is a conceptual diagram for describing creation of an array of parts in the preferred embodiment of the invention;

15 Figure 36 shows message flows in an event monitor registration procedure in the preferred embodiment of the invention;

Figure 37 shows message flows in a campaign definition procedure in the preferred embodiment of the invention;

Figure 38 is a conceptual diagram of an arrangement rule DB in the preferred embodiment of the invention;

20 Figure 39 shows message flows in an event subscription procedure in the preferred embodiment of the invention;

Figure 40 is a conceptual diagram showing information managed by a user management DB in the preferred embodiment of the invention;

25 Figure 41 is a conceptual diagram showing items managed by a subscription DB in the preferred embodiment of the invention;

Figures 42A and 42B show message flows in an event monitoring and notification procedure in the preferred embodiment of the invention;

Figure 43 is a prior art for embedding contents into a page
5 template; and

Figure 44 is a prior art for embedding contents into a page template.

Detailed Description of the Invention

A. Hardware configuration

10 Figure 1 shows a schematic view of hardware configuration for realizing an information terminal 110, a web server 120 and a client machine 130 (See Figures 2A and 2B, collectively Figure 2) according to the present invention. The information terminal 110, the web server 120 and the client
15 machine 130 include a central processing unit (CPU) 1 and a memory 4. To the CPU 1 and the memory 4 are connected hard disk units 13 and 31 as auxiliary memory units via a bus 2 and the like. Floppy disk units (or medium drive units 26, 28, 29 and 30 such as MOs 28 or CD-ROMs 26 and 29) 20 are
20 connected to the bus 2 via a floppy disk controller (or various controllers including an IDE controller 25 and an SCSI controller 27) 19.

Into the floppy disk unit (or medium drive units 26, 28, 29 and 30 such as MOs and CD-ROMs) 20 are inserted floppy
25 disks(or media such as MOs or CD-ROMs), and these storage media such as floppy disks or the hard disk unit 13, the ROM 14 or the like can record, working in concert with an

operating system, computer program codes for giving commands to the CPU and the like and implementing the invention, and they are executed by being loaded into the memory 4. These computer program codes can be compressed or divided into a plurality to be recorded into a plurality of media.

The information terminal 110, the web server 120 and the client machine 130 can further be put together into a system provide with user interface hardware, and this user interface hardware would include, for instance, a pointing device (mouse, joystick, track ball or the like) 7 for inputting screen position information, a keyboard 6 for supporting key inputting, and displays 11 and 12 for presenting image data to the user. A loudspeaker 23 receives audio signals from an audio controller 21 via an amplifier 22, and outputs them aurally.

These information terminal 110, web server 120 and client machine 130 can communicate with other computers or the like via a serial port 15 and a modem or a communication adapter 18, such as a token ring.

The present invention can be implemented with a conventional personal computer (PC), a workstation, or a computer incorporated into a household electrical appliance such as a television receiver or a facsimile machine, or a combination thereof. However, these constituent elements are cited merely as examples, but all these constituent elements are not indispensable for implementation of the invention. Particularly, since the invention is intended for dynamic alteration of contents to be embedded into a page template, such constituent elements as the audio controller 21, the amplifier 22 and the loudspeaker 23 are dispensable in some modes of carrying out the invention.

The operating system on the side of the information terminal

110, the web server 120 and the client machine 130 is not limited to any specific operating system environment, but realization is possible with what supports GUI multi-window environment as a standard function, such as Windows NT (a trademark of Microsoft), Windows 9x (a trademark of Microsoft), Windows 3.x (a trademark of Microsoft), OS/2 (a trademark of IBM), MacOS (a trademark of Apple), or Linux (a trademark of Linus Torvlds) or X-WINDOW system (a trademark of MIT) on AIX (a trademark of IBM), one for a character base environment such as PC-DOS (a trademark of IBM) or MS-DOS (a trademark of Microsoft), a real time OS such as OS/Open (a trademark of IBM) or VxWorks(a trademark of Wind River Systems, Inc.) or an OS incorporated into a network computer such as JavaOS.

B. System configuration

Figure 2 is a functional block diagram illustrating the system configuration of a system including a web page generating system in a preferred embodiment of the present invention.

In the preferred embodiment of the invention, in an information terminal 11 is installed a web browser 111. The web browser 111 designates URL, and transmits an HTTP request to a prescribed web server 120. It also receives a response transmitted from the web server 120, and displays it on a display screen.

On the other hand, the web server machine 120 in the preferred embodiment of the invention is provided with a formatter 121, a display area contents creator 123, a schedule engine 125, a web server program 127, an e-mail sender 151, an event monitor 153, a subscription receiver 155 and a subscriber DB manager 157.

The formatter 121 formats contents into a prescribed form on

the basis of attribute information in which various resources are set in a display area to be described below (including the display position, height, width, style and format).

5 The display area contents creator 123 searches an arrangement rule DB for candidates of contents to be embedded into a page template, and pinpoints contents to be displayed out of the candidates according to such conditions as schedule and customer cell. It also hands over to the formatter 121 the contents to be displayed and information set in the display
10 area, receives formatted contents, embeds them into the page template, and returns them to the web server 127.

15 The schedule engine 125 judges whether or not the time of accessing by the user satisfies the conditions of schedule definition. The schedule definition can also set conditions combining such items as the day of the week and the time range in addition to the period.

20 The subscription receiver 155 provides the user with a list of published event parts registered with an arrangement rule DB manager 143 to be described below, and registers into a subscriber DB 157 the ID, condition formula and notification form of the parts selected by the user, together with user information extracted from a user management DB 159.

25 The event monitor 153 periodically monitors the contents of this subscriber DB 157 to check external or internal resources to be monitored (the external web server 115 in the illustrated example). If the checked resource meets a prescribed condition, accesses the subscriber DB 157 with that condition as the key, references the notification form, and executes processing matching the notification form.

30 The e-mail sender 151 takes out e-mail parts from the arrangement rule DB 143 in response to an instruction from

the event monitor 153, generates an e-mail by embedding prescribed information, and transmits it. The user management DB 159 manages customer information.

The client machine 130 is provided with a template parser 131, a resources manager 133, a resources DB manager 135, a page designer 137, a component DB manager 141, and an arrangement rule DB manager 143.

The template parser 131 analyzes the page template, detects a display area contained in the page template, and extracts its attributes (including the display position, height, width, style and format).

The resources manager 133 provides the operator with a GUI for registering/altering/deleting JavaBeans. In the preferred embodiment of the invention, objects such as the page template, banner, Telop and button, and the customer cell (where the contents to be displayed vary with the user, a user group for whom different information is to be displayed is called a customer cell) are also registered into the resources DB as JavaBeans. Each Bean has a Java object code and attributes, and the Java object code is caused to be executed and a list of attributes held by the Bean to be taken out by making an inquiry with a common interface. In the case of a banner Bean for instance, it has such attributes as the type of Bean, part name, image file to be displayed, URL of link destination, and explanatory statement. In the preferred embodiment of the invention, the page template is also registered as a JavaBean in order to enhance versatility.

The resources DB manager 135 manages the resources DB. The resources DB manages parts before attribute information is set. In the preferred embodiment of the invention, for a part managed by the resources DB, only its type (as to the

page template, Telop, banner and so forth) and bibliographical items are registered, but no substantive attributes such as what kind of image is to be displayed are registered. This configuration contributes to increasing the speed of retrieval among other advantages.

The component DB manager 141 manages the component DB. The component DB manages attribute information on parts. Where the part is a banner Bean for instance, it manages such items of information as the part name, image file to be displayed, URL of link destination, and explanatory statement.

The arrangement rule DB manager 143 manages the arrangement rule DB. The arrangement rule DB stores information to associate display areas with parts, schedule information, and information for determining the possibility of publishing. The operator can also obtain a list of parts stored in this DB by using the page template name and the display area name as the keys.

The page designer 137 provides the operator with a GUI which makes possible for a part to undergo arrangement registration, schedule setting, and registration/alteration of publishing decision or the like.

Figure 3 is a conceptual diagram illustrating the state transitions of parts in the preferred embodiment of the invention. In the figure, registered parts 203 (class) consist of information (metadata) registered under the management of the resources manager 133, and permit alteration and deletion. These registered parts 203 are stored into the resources DB 135. At this stage, for any such part, only its type (as to the page template, Telop, banner and so forth) and bibliographical items are registered, but no substantive attributes such as what kind of image is to be displayed are registered.

Set parts 205 (instance) associate registered parts 203 with set information (banner, Telop, list and so forth) according to the property of each part, and permit alteration and deletion. These set parts 205 are stored into the arrangement rule DB 143. In this state, the set parts 205 have, if the part is a banner Bean for instance, such attributes as the type of Bean, part name, image file to be displayed, URL of link destination, and explanatory statement. The attributes are stored into the component DB. In the preferred embodiment of the invention, in setting the properties of a part, the operator can reference and select contents registered in the resources DB.

Arranged parts 207 are associated with the set parts 205 with respect to display areas, and permit deletion. The set parts 205 are stored into the arrangement rule DB 143.

Publishable parts 209 are arranged parts having undergone schedule setting, and permit alteration and deletion. These publishable parts 209 are stored into the arrangement rule DB 143. Published parts 211 are publishable parts having been published. They can be returned to publishable parts 209 by unpublishing operation. These publishable parts 209 are stored into the arrangement rule DB 143. Expired parts 213 are either publishable parts 209 or published parts 211 whose schedule has expired.

Incidentally, while in the preferred embodiment of the invention information to associate a display area with parts is stored in the arrangement rule DB with a view to reducing the time required to retrieve parts arranged in a prescribed display area, the invention can as well be implemented by assigning such information to individual parts. Further, out of the parts arranged in the prescribed display area, the schedule is also held incidental to individual arranged data

in the arrangement rule DB to reduce the time taken to determine what satisfies the schedule condition, the invention can also be implemented by assigning this information to individual parts. Similarly, information on whether or not a given part is published is managed by the arrangement rule DB, it may as well be managed by the component DB as attributes of part.

Whereas each functional block shown in Figure 2 has been described so far, these functional blocks are logical functional block, and it is not meant that each of them is realized by an integrated set of hardware or software, but they can be combined or realized by a common set of hardware or software. Especially, while the web server 120 and the client machine 130 are mounted on different machines in this embodiment, the functions described with reference to the client machine 130 can as well be assigned to the web server 120. Further, all the functional blocks shown in this Figure 2 are not indispensable constituent elements for the invention.

C. Procedures of operation

C-1. Registration of contents

Figure 4 shows message flows in the contents registration procedure in the preferred embodiment of the invention. As shown in Figure 4, the contents creator 501 opens a resources manager main panel 503 provided by the resources manager 133, designates created contents (in the preferred embodiment of the invention the location of the contents - URL - is designated), and registers the contents (message 5001).

The resources manager main panel 503, in response to this, generates metadata 507 on the memory (messages 5002 and 5003). If the generation has been completed normally, the

URL of the contents is registered into the metadata 507 (message 5004). The resources manager main panel 503 then opens a resources metadata definition panel 505(messages 5005, 5006 and 5007).

- 5 The contents creator 501 enters bibliographical items (including the creator, the date of creation and a description of contents) into this resources metadata definition panel 505. Further in the preferred embodiment of the invention, such items as the date and hour of registration are automatically set, and the type of contents can be selected from a pulldown menu. When the contents creator 501 presses an OK button on the resources metadata definition panel 505, metadata (including information on the link to the contents) are written into the resources DB 509, and the inherent ID of the contents is generated and set, associated with the metadata, in the resources DB 509 (messages 5010, 5011, 5012, 5013, 5014 and 5015).

C-2. Registration of page template

- Figure 5 shows message flows in the page template registration procedure in the preferred embodiment of the invention. As shown in Figure 5, the contents creator 501 opens a resources manager main panel 503 provided by the resources manager 133, designates a page template (in the preferred embodiment of the invention the location of the contents - URL - is designated), and registers the page template (message 5101).

- The resources manager main panel 503, in response to this, generates metadata 507 on the memory (messages 5102 and 5103). If the generation has been completed normally, the URL of the contents is registered into the metadata 507 (message 5104).

Next, the resources manager main panel 503 hands over the URL to the template parser 511, and requests analysis of a display area (message 5105). The template parser 511 accesses the page template 250 as shown in Figure 7, and
5 analyzes the display area contained in the page template 250. In the preferred embodiment of the invention, it searches for SERVLET tags 261 and 263 contained in the HTML and, by detecting a character string 'code="icdacr"', recognizes it as a servlet defining the display area.

10 If a display area is recognized, such items of information on each display area contained in a page template as the position in the sequence of display areas contained in that page template, display area name, display position, display style, width and height are recognized (message 5106).

15 Then the resources manager main panel 503 opens the resources metadata definition panel 505 (messages 5005, 5006 and 5007). The contents creator 501 enters bibliographical items (including the creator, the date of creation and a description of template) into this resources metadata
20 definition panel 505. Further in the preferred embodiment of the invention, such items as the date and hour of registration are automatically set.

When the contents creator 501 presses the OK button on the resources metadata definition panel 505, the resources
25 metadata definition panel 505 writes metadata (including information on the link to the contents) and display area information recognized by the template parser 131 (such items of information as the display area number, display area name, display position, display style, width and height) into the
30 resources DB 509 (messages 5112, 5113, 5114 and 5115).

C-3. Registration of formatter

Figure 6 shows message flows in the formatter object registration procedure in the preferred embodiment of the invention. As shown in Figure 6, the contents creator 501 opens a resources manager main panel 503 provided by the resources manager 133, designates a formatter object (in the preferred embodiment of the invention the location of the contents - URL - is designated), and registers the formatter (message 5151).

The resources manager main panel 503, in response to this, generates metadata 507 on the memory (messages 5152 and 5153). Then the resources manager main panel 503 opens the resources metadata definition panel 505 (messages 5154 to 5156). The contents creator 501 enters into this resources metadata definition panel 505 the format style (designates outputting of banners in a matrix form and so forth), output type (such as HTML, FAX or PostScript), adaptable part types (banner, Telop and so forth), formatter location (the location of the program to be actually executed) and other bibliographical items (messages 5157 to 5164). In the preferred embodiment of the invention, such items as the date and hour of registration are automatically set.

When the contents creator 501 presses the OK button on the resources metadata definition panel 505, the resources metadata definition panel 505 writes metadata (including information on the link to the format execution program) into the resources DB 509 (messages 5168 to 5172).

C-4. Setting of attributes of part (creation of part)

Figures 8A and 8B (Collectively Figure 8) and Figure 9 show message flows in the part creation procedure in the preferred embodiment of the invention. As shown in Figure 8, the web page creator 521 opens from the page designer main screen a list of set parts screen 523 (message 5201), and as it

selects part creation(message 5202), a part type selection screen 525 is opened. The screen configuration of a page designer 137 in the preferred embodiment of the invention is illustrated in Figure 10.

- 5 As the web page creator 521 selects a part type in the parts type selection screen 525, metadata on registered parts fitting that part type are acquired from the resources DB 135 (messages 5203 and 5204). Further, a distinct part ID and part name are assigned to each part type (messages 5205,
10 5206, 5207, 5208 and 5209).

- Confirmation of a part type by the web page creator 521 (message 5210) results in generation of a new part 531 (messages 5211 and 5212), metadata and the creator name of the registered part are set (messages 5213 to 5216), and a
15 part attribute definition panel 533 is opened (messages 5217 to 5219).

- The web page creator 521 sets on this part attribute definition panel 533 prescribed properties (a list of unregistered Telop messages, URL of link destination and so
20 on), part name and explanatory statement (messages 5221 to 5227).

- The web page creator 521 can as well open a contents selection panel 537 from this part attribute definition panel 533 and access images, texts and the like registered in the
25 resources DB 527 (messages 5228 to 5234). If it is a banner part, for instance, a list of images to be displayed and URL of link destination among others can be obtained or, if it is a Telop part, a list of messages to be outputted can be obtained.

- 30 When the web page creator 521 selects prescribed contents from a list of contents, contents information stored in the

resources DB 135 is registered as part properties (messages 5235 to 5241). Then, as the web page creator 521 makes final confirmation on the part attribute definition panel 533, part information, parts ID and alteration history information are
5 registered into the component DB 535 (messages 5242 to 5249).

C-5. Arrangement of parts

Figures 11A and 11B (Collectively Figure 11) and Figure 12 show message flows in the parts arrangement procedure in the preferred embodiment of the invention. As shown in Figure
10 11, the web page creator 531 first accesses a part selection panel 543 via a part arrangement panel 533 (messages 5301 and 5302), and acquires a display area in which to arrange parts registered in the resources DB 537 (messages 5303 and 5304). Then it acquires attribute information (including the display
15 position, height, width, style and format) on the display area (messages 5305 and 5306).

In the preferred embodiment of the invention, items of attribute information on a display area include what is known as a display area style. This display area style is an item
20 of attribute information to designate the form of displaying a part (by using HTML) selected (according to the conditions of cell and schedule). Available display styles include, for instance, bannerFlow and itemizedList.

With each display style, the type of display-shapable parts
25 is associated in advance by a resources manager. For instance, Banner part (image file with a link) is associated with the bannerFlow style, and ListItem part (1 line text with a link), with itemizedList. In the preferred embodiment of the invention, this association is designated when a
30 formatter to generate HTML according to each display style is registered with a resources manager.

A list of parts that can be pasted in a display area shows the type of parts displayable in the display area, selected out of set parts on the basis of information associating a display area style with displayable part types (messages 5303 to 5331).

Then, as the web page creator 531 selects a desired part out of this list, the part is associated with a display area, and the association is stored into the arrangement rule DB 553.

C-6. Addition of parts to display area

Figure 13 shows message flows in the procedure of adding parts to a display area in the preferred embodiment of the invention. In the preferred embodiment of the invention, there is a separate GUI panel for selecting and associating display areas and parts as illustrated in Figure 14. When a display area 621 is selected from this display area list 630 on this panel and a "parts arrangement" button 643 is pressed, messages 5301 to 5331 in the sequential Figures 11 and 12 are processed. Figure 13 shows subsequent message flows.

When the web page creator 541 selects a prescribed part out of the parts list displayed on the part selection panel 543 (message 5401), an arranged object 545 is newly generated on the memory. Then, a part ID and a display area ID are set on this generated arranged object 545 (messages 5404 to 5409), and written into the arrangement rule DB (messages 5410 to 5414).

C-7. Schedule definition

Figure 15 shows message flows in the procedure of schedule definition of arranged parts in the preferred embodiment of the invention. As illustrated in Figure 15, the web page

creator 551 first designates a set of a display area and parts in the parts arrangement panel 553, opens a schedule definition panel 555 (messages 5501 and 5502), and accesses an arranged part to undergo schedule registration (revision) by the web page creator 551 (messages 5503 and 5504).

If that arranged part is not published, a schedule currently set for the part is acquired to newly set or alter a schedule (message 5505). If no schedule is set, a schedule registration screen with no data thereon will be outputted or, if a schedule is already set, there will emerge a schedule revision screen. In the preferred embodiment of the invention, no schedule alteration can be done unless no part is published (in an unpublished state). This is intended to prevent a part display schedule from being changed when general users are watching it.

C-8. Publishing decision

Figure 16 shows message flows in the procedure of publishing decision on contents to be embedded into a display area in the preferred embodiment of the invention. As illustrated in Figure 16, as the web page creator 571 designates a display area and parts on a part arrangement panel 573 and designates publishing, a publish flag is set on an arranged object 575 (messages 5701 to 5703), and the contents of the arranged object are written into the arrangement rule DB. Cancellation of publishing (unpublishing) can be designated in a similar procedure.

C-9. Generation of contents for display area

Figures 17A and 17B (Collectively Figure 17) and Figure 18 show message flows in the procedure of generating contents to be embedded into a display area in the preferred embodiment of the invention. As illustrated in Figure 17, as a user 561 transmits an HTTP request from the web browser 111 to the web

server 127, the web server 127 acquires a page template matching that HTTP request.

The web browser 127 detects a servlet tag contained in the page template, hands over a code (Figure 19) contained in the servlet tag to the display area contents creator 123 (message 5601), and stands by until the result is received.

Then the display area contents creator 123 acquires a display area (messages 5602 and 5603), and acquires metadata of a template containing that display area from the resources DB 567 (messages 5604 and 5605). In the preferred embodiment of the invention, display areas are managed by a display area name 701, and the resources DB 567 and the arrangement rule DB 565 can be accessed with this display area name 701 as the key.

With these display area name 701 and page template ID 725 (acquired by message 5605) as the keys, the arrangement rule DB of this display area is accessed, and arranged objects are acquired (messages 5606 and 5607). Incidentally, while arranged objects are acquired with the display area name 701 and the page template ID 725 as the keys in the preferred embodiment of the invention, they can as well be accessed with only the display area name as the key by providing a display area name that can uniquely specify every page template.

In the example of Figure 20, arranged objects 0001 and 0002 are acquired. Schedule information pieces 727 and 728 are taken out of these acquired arranged objects (messages 5608 and 5609), and a schedule engine 571 is inquired of about their validity (messages 5610 and 5611). It is further checked whether or not their parts are published (messages 5612 and 5613). In the example of Figure 20, both the arranged objects 0001 and 0002 are published. Incidentally,

supposing that the current date and hour are 19:00 on July 26, 1999, in the example of Figure 20, the arranged object 0001 does not meet the schedule condition while the arranged object 0002 does meet the schedule condition.

5 If it is judged that the scheduled is a valid one and a published part, a component DB 575 is accessed, and such items of information matching that part as the display image file, URL of link destination and explanatory statement are acquired (messages 5714 and 5715).

10 Figure 21 is a conceptual diagram of the component DB in the preferred embodiment of the invention. In the preferred embodiment of the invention, a banner 750, list item 760, Telop 770 and so forth are registered as objects, instead of a simple table, to match a plurality of types of objects.

15 Contents information items such as items of information to specify the display image of a banner (the bus name, directory name and file name) are set as properties of a banner object 750. The system can acquire contents information and make available to itself image information

20 and the like by making an inquiry with the part name or the part ID as the key.

Referring back to Figure 17, a display area contents creator 563 acquires display attributes 703 (Figure 19) (message 5616) and, using a formatter 577, shapes the contents to

25 adapt them to the display area (messages 5617 to 5631).

Figure 22 shows message flows in the procedure of shaping the contents by the formatter in the preferred embodiment of the invention. As shown in Figure 22, the display area contents creator 563 takes out of formatter metadata 578 a format

30 style registered as a category, compares it with the style of the display area, and judges whether or not those contents can be displayed (messages 5651 to 5653). It further takes

out the type of output registered as a subcategory of metadata, and checks if the output form is HTML (messages 5654 to 5656).

While the formatter to be used is thus specified according to the type of part or output means such as the banner (standard), (a plurality of) banners, Telop and list item in the preferred embodiment of the invention, it is also acceptable to adopt a method by which the formatter is specified by using an ID which uniquely identifies a specific formatter or a method to specify a formatter by calculating a prescribed assessment value.

Then, information indicating the location of an actual format program (Identifier) is acquired from metadata 578 (messages 5657 and 5658), and a format program is loaded on the basis of that information (message 5659). This loaded format program is defined as the formatter to be used for this processing (messages 5660 and 5661).

Figure 23 is a conceptual diagram of a formatter 780 in the preferred embodiment of the invention. As illustrated, it has a parameter defining section (setStyleParm), width defining section (setWidth), height defining section (setHeight), overfull processing defining section (setOverfull), underfull processing defining section (setUnderfull) and format processing defining section (render).

The parameter defining section is a portion wherein a parameter received for each formatter is defined. The width defining section and the height defining section are portions where the size of a display area is acquired. The overfull processing defining section is a portion to acquire the type of processing to be performed when the size of any part to be displayed in a display area is greater than the display area,

while the underfull processing defining section is a portion to acquire the type of processing to be performed when the size of any part to be displayed in a display area is smaller than the display area. The format processing definition
 5 section (render) is information to specify the location of the actual format program.

This formatter is such that, where for instance the definition in the display area is in a standard banner form (banner is set as the style) as shown in Figure 24, the four
 10 banners to be displayed are replaced every two seconds in the display area as shown in Figure 25 if, in an overfull case, the rotation is to take place at two second intervals (rotation = 2 is set in partsOverful).

Further, as "shrink" is set in partsUnderful, when the size
 15 of any part to be displayed in a display area is smaller than the display area, the display area is displayed in a size shrunk to the size of the banner. Moreover, since an image is set on "default," the image defined here is displayed if there is no banner to be displayed.

Figures 26 and 27 are flowcharts showing the formatter
 20 process where a standard banner form is designated in the preferred embodiment of the invention. First, the formatter acquires the number of parts (step 401), and checks that number of parts. In one aspect of the present invention, whereas the number of parts registered corresponding to a
 25 display area in the arrangement rule DB 720 and whose display conditions 727 to 729 have prescribed values matches the number of parts, in one aspect of the invention the contents to be displayed in a specific display area are stated in a
 30 bus name and the like in a fixed manner, and the number of such statements, or the number of contents as the result of acquisition thereby accomplished, corresponds to the number of parts.

In order to judge that the number of parts is smaller than one (the number of parts = 0) (step 403), first the control command of partsUnderful is checked. If "none" is designated as the control command of partsUnderful (step 407), an HTML
5 containing a blank area of a designated size is generated, and it is handed over to the display area contents creator 123 (step 407).

If "shrink" is designated as the control command of partsUnderful or there is no particular designation (in the preferred embodiment of the invention, partsUnderful = shrink
10 is default), it is further judged whether or not a default display image is designated (step 409). If a default display image is designated, an HTML including bus information designated for default is generated, and handed over to the
15 display contents creator 123 (step 411). If no default display image is designated, the absence of output information is notified back to the display contents creator 123 (step 413).

On the other hand, if the number of parts is judged to be 1
20 (step 421), an HTML to display the contents of the part in an area of a designated size is generated, and handed over to the display area contents creator 423 (step 423).

If the number of parts is judged to be more than one (step 421), it is further checked whether or not partsOverfull
25 contains a command instructing rotation (step 425). If PartsOverfull contains designation of random, or if there is no particular designation (in the preferred embodiment of the invention, random is default), one part is selected out of a plurality of parts at random (step 427), an HTML to display
30 the contents of parts within an area of a designated size is generated, and handed over to the display area contents creator 423 (step 423).

If it is judged that partsOverfull contains a command to instruct rotation, parts are selected in succession (step 429), an HTML to display the contents of the parts in an area of a designated size is generated, and handed over to the display area contents creator 423 (step 431). Then, after standing by for a prescribed length of time included in the rotation command, step 429 and step 431 are repeated (step 433). Incidentally, while a command to generate a time out is transmitted, in the preferred embodiment of the invention, from the web server 120 side between step 431 and step 433 to instruct the browser 111 to perform replotting, it is also acceptable to transmit a formatter logic to the browser 111 side as JavaScript or the like and to let a replotting event be generated on the browser 111 side.

On the other hand, in a form wherein a plurality of banners are displayed side by side (bannerFlow is set as the style) as shown in Figure 28, if, in an overfull case, the rotation is to take place at two second intervals (random is set in partsOverful) the four banners to be displayed, as shown in Figure 29, are placed in sequence from the top left of the display area and, when the width of the display area is overstepped, shift to a stage below to be displayed. Incidentally, in this example, the direction in which the banners are placed is horizontal and the background color is set to be gray. If the direction is set to be vertical, the banners can as well be placed in a vertical direction as illustrated in Figure 30.

Figures 31 and 32 are flowcharts showing a formatter process in which a banner flow form is designated in the preferred embodiment of the invention. First the formatter acquires the number of parts (step 441), and checks that number of parts. If the number of parts is judged to be smaller than one (the number of parts = 0) (step 443), it is further

judged whether or not a default display image is designated (step 481). If a default display image is designated, an HTML including path information designated for default is generated, and handed over to the display contents creator 123 (step 483). If no default display image is designated, the absence of output information is notified back to the display contents creator 123 (step 485).

If there is any part to be displayed, an array of parts to display (the contents of) every part is created (step 445). This array of parts constitutes data to designate which part is to be arranged on which line in which row. Figure 33 is a conceptual diagram for describing the creation of an array of parts at step 445 in the preferred embodiment of the invention.

The formatter first confirms that the direction of arrangement is horizontal and that the width of the display area is not smaller than the width of the parts. Then it acquires parts in succession, and allocates those parts to a position (n, m) (both are 0 in initial value). It checks whether or not the total of the widths of the parts surpasses the width of the display area and, if it does not, allocates the parts to that position, and raises m to m+1. If the total of the widths of the parts surpasses the width of the display area, with n being raised to n+1 and m reduced to 0, those parts are allocated to that position, and m is raised to m+1. This procedure is repeated for all the parts, and the maximum values of n and m are acquired. The size of the array of parts will be the part width \times m and the part height \times n. Further, by comparing the part height \times n with the display area height every time n is incremented by one, the appropriate number of parts to be accommodated by the display area can also be acquired. The array of parts in the vertical direction can be created in a similar procedure.

Then it judges whether or not the height of the display area is in sufficient (in the case of arranging in the horizontal direction) or the width of the display area is in sufficient (in the case of arranging in the vertical direction) as a result of (or in the process of) arraying the parts (step 447). If it is judged that the display area is not too small, it is further judged whether or not there is a surplus height of the display area (in the case of arranging in the horizontal direction) or there is a surplus width of the display area (in the case of arranging in the vertical direction) (step 449). If it is judged that the size of the array of parts is appropriate for the display area, an HTML to display that array of parts is generated, and handed over to the display contents creator 123 (step 451).

If it is judged that the display area is too large, the control command of partsUnderful is checked. If "none" is designated as the control command of partsUnderful (step 455), an HTML to display the array of parts in a display area of the designated size is generated, and handed over to the display area contents creator 123 (step 407).

If "shrink" is designated as the control command of partsUnderful, or if there is no particular designation (in the preferred embodiment of the invention, partsUnderful = shrink is default), an HTML to reduce the designated size of the display area and display the array of parts is generated, and handed over to the display area contents creator 123 (step 457).

On the other hand, if it is judged at step 447 that the display area is too small, the control command of partsOverful is checked. It is checked whether or not a command instructing rotation is contained as the control command of partsOverful (step 461).

If it is judged that partsOverfull contains a command

instructing rotation, the parts are selected in succession to re-create an array of parts (step 463). Figure 34 is a conceptual diagram for describing the creation of an array of parts at step 463 in the preferred embodiment of the invention. As illustrated, parts in the appropriate number of parts acquired at step 445 are selected in succession, and an array of parts is created by the method described with reference to Figure 33. After the lapse of a designated length of time, parts in the appropriate number of parts are selected in succession from the next part onward to re-create an array of parts.

Then, an HTML to display the contents of the array of parts in a display area of the designated size is generated, and handed over to the display area contents creator 423 (step 465) and, after standing by for a prescribed length of time included in the rotation command, step 429 and step 431 are repeated (step 467).

If partsOverfull contains no designation of rotation at step 461, it is further checked whether or not the control command of partsOverful contains "expand" (step 471).

If "expand" is contained in partsOverfull, an HTML to expand the designated size of the display area and display the array of parts is generated, and handed over to the display area contents creator 123 (step 473). If "random" is designated by partsOverfull or if there is no particular designation (in the preferred embodiment of the invention, random is default), parts in a number to be appropriately arranged in the display area are selected out of a plurality of parts at random to create an array of parts (step 475).

Figure 35 is a conceptual diagram for describing the creation of an array of parts at step 475 in the preferred embodiment of the invention. As illustrated, parts in the appropriate

number of parts acquired at step 445 are selected at random, and an array of parts is created by the method described with reference to Figure 33. Then, an HTML to display the contents of the array of parts in a display area of the designated size is generated, and handed over to the display area contents creator 423 (step 477).

D. Example of application to campaign using Internet

An aspect to alter the information to be displayed for a prescribed user in accordance with the circumstances of external resources and an aspect of notification in combination with e-mail will be described below.

D-1. Registration of event monitor, condition determining cell parts and event cell parts

Figure 36 shows message flows in a procedure to register an event monitor in the preferred embodiment of the invention. As shown in Figure 36, a registrant 571, using a resources manager 573 as in the case of Figure 4, can register into a resources DB 575 event monitor parts in the JavaBean form (messages 5701 and 5702). In an event monitor JavaBean in the preferred embodiment of the invention, there are such items as monitoring object, monitoring frequency, notification form, and path information for event cell parts.

Also, in a procedure similar to the foregoing, condition determining cell parts and event cell parts are also registered. Condition determining cell parts include the conditions of an event target (for instance, out of user information to be contained in the user management DB, conditions for categorizing a user such as a prescribed age bracket, prescribed occupation, prescribed income level and a prescribed official position and their explanatory statements are contained as the items). Event cell parts are cell parts

for registering persons for whom an event is to be actually held, and hold as their items information to specify condition determining cell parts (parts ID), filtering conditions and e-mail part ID. E-mail parts include such
5 items as "from", "to", contents and explanatory statement.

D-2. Definition of campaign

Figure 37 shows message flows in a campaign defining procedure in the preferred embodiment of the invention. As shown in Figure 37, a campaign registrant 581, using a
10 prescribed screen of a page designer 585 as in the case of Figure 8 to Figure 12, accesses the resources DB 575, and acquires a list of registered event monitors (messages 5801 to 5803).

A campaign definer 581 selects registration of a new event
15 monitor (message 5804), and registers properties from the registration screen (message 5805). For instance, as monitoring objects, there are set an explanatory statement allowing intuitive perception of a monitoring object (such as the stock of an information company listed in the first
20 section of the Tokyo Stock Exchange) and information which can identify the location where that information can be acquired (URL, information to specify a particular type of data in an HTML tag). As monitoring frequencies, such items as the default value, upper limit and lower limit are set.
25 Notification forms which are set include the presence or absence of an e-mail notification. As path information for an event cell part, the path name, directory name and file name of the published event cell part are set. It is also practicable to set a part ID.

30 Then, as elements of campaign rules, schedule information and information on publication or non-publication are entered (message 5807). Incidentally, in this aspect of generating

an event depending on the situation of other resources, it is desirable that an arrangement rule DB 720 manage such information as shown in Figure 38. As this table shows, information including a part type 731, event flag 733, cell

5 part ID 735 is added to the arrangement rule DB 720. The part type 731 is information to distinguish the type of the part, such as a banner part, Telop part, event cell part, condition determining cell part or event monitor part. Further, the event flag 733 is a flag to determine, where

10 subscription to be described below takes place, whether an event is validated or not, and as the cell part ID 735 is set, in the case of an event monitor part, a condition determining cell part to be used by a user having performed subscription to be described below judges whether or not

15 prescribed conditions are met, and in other cases, an event cell part registered for persons for whom the event is actually intended is registered.

Then, a page designer 583 designates an arrangement object for an event monitor 589 to instruct starting of the event

20 monitor for the event (message 5808). This causes the event monitor 589 to start monitoring the event.

D-3. Subscription to event

Figure 39 shows message flows in an event subscribing procedure in the preferred embodiment of the invention. As

25 shown in Figure 39, a user 591 desiring to subscribe to an event accesses a web page (message 5901). An execution run time (a component including the display area contents creator 123 and the schedule engine 125 in Figure 2) accesses a user management DB 594, and acquires a user ID with Cookie

30 contained in the HTTP request as the key (message 5902).

Figure 40 is a conceptual diagram showing items of information managed by a user management DB 740 in the

preferred embodiment of the invention. As shown in the table, the user management DB 740 manages a user ID 741, Cookie 743, e-mail address 745 and user profile information 747. The user profile information 747 includes information on that user including his or her age, occupation, place of work, home address and office address. In the preferred embodiment of the invention, a user registers these items of information on condition that he or she receive prescribed service on Internet. The user ID is automatically generated by the system. The system can acquire information contained in that record with the Cookie 743 and user ID as the keys.

If the execution run time 593 recognizes the user as a registered member, it displays a list of published event monitor parts for the user (messages 5904 to 5906). Incidentally, if the execution run time 593 does not recognize the user as a registered member, a user registration panel can as well be outputted. Further, the preferred embodiment of the invention supposes subscription service for a membership, and it is also possible to provide subscription service for general public instead of a specific membership.

When the user has selected an event monitor, an event setting screen is displayed (messages 5907 and 5908). Then the user sets parameters for a condition formula and a notifying method (message 5909). For instance, the user can set such a condition that a notification by e-mail is desired when the stock price of Company A has risen above ¥120.00.

Then these set information and user management DB information are stored into a subscription DB 597 (messages 5910 to 5913). Figure 41 is a conceptual diagram showing items managed by the subscription DB 597 in the preferred embodiment of the invention. As shown in the table, a subscription DB 750 manages a subscription ID 751, user ID

753, part ID 755, condition formula 757, notification form 758, and campaign flag 759. Then, if the event monitor designated by the user is not started, it is started (message 5914).

5 D-4. Monitoring and notification of event

Figures 42A and 42B (Collectively Figure 42) shows message flows in an event monitoring and notifying procedure in the preferred embodiment of the invention. As shown in Figure 42, a started event monitor 653 monitors a monitoring object 10 651 containing data varying periodically or non-periodically in a period based on set monitoring frequency information (message 6501). In the preferred embodiment of the invention, the event monitor 653 has information items including a monitoring object, event generating condition, 15 monitoring frequency, subscription ID and event flag, and monitors objects whose event flag is on. Incidentally, in the preferred embodiment of the invention, there further is a monitor part to monitor the event monitor, turning off the event flag 733 (Figure 38) whose schedule has ended and 20 notifying the event monitor 651 of that action.

Then, if the event monitor 651 finds that the event generating condition has been met, it accesses a subscription DB 655 and returns a user ID and part ID matching the subscription ID (messages 6502 and 6503). Then, the event 25 monitor 653 accesses an arrangement rule DB 657 with the part ID as the key, and acquires a condition determining cell part ID 735 (Figure 38). It further accesses the component DB, takes out a determining condition for condition determining cell parts, compares it with the user profile of the user 30 management DB, and judges whether or not it is an object of the campaign (messages 6504 and 6505).

If the user is judged to be a target of the campaign, an

event cell part matching the condition determining cell part is taken out, and the user ID or Cookie of that user is registered into that event cell part (message 6506). It is also possible to register only those users having designated a web in the notifying form.

Then, if the notification form 758 taken out of the subscription DB designates e-mail, the event monitor hands over the ID of the e-mail part registered in the event cell part and the user ID to the execution run time (message 6507).

The execution run time 659 accesses the e-mail part, acquires an e-mail sender (From) (messages 6508 to 6511), and requests an e-mail sender 663 to send the e-mail together with the user ID (message 6512).

The e-mail sender 663 accesses a user management DB 665, acquires an e-mail address from the user ID, generates an e-mail on the bases "from" and contents information held as a property by the e-mail part, and transmits the e-mail (message 6515).

And, if this user has transmitted an HTTP request asking for a prescribed page template, the processing described with reference to Figures 17 and 18 is executed. Then, an arrangement object used for this processing judges the event flag 733 and cell part ID 735 shown in Figure 38, together with the schedules 727 and 728 and publish flag 729 as display conditions. In such a case, a cell part in which this user is registered is designated in the cell part ID 735 by message 6506 of Figure 42, and the event flag is also set to be on, so that an HTML to display prescribed parts (banner) in the display area is acquired.

Thus, since shaping of a banner part has been taken up in

describing the preferred embodiment of the invention, its formatter performs shaping (to fit the size of contents) of a display area, outputting of a default image, control of the background color, selection of the contents to be displayed, and control of the displaying sequence, display position, display time and display method of contents, but in the case of a formatter shaping a Telop part, it can also control the scrolling speed, font name, font size and character color.

As hitherto described, according to the present invention, it is possible to alter contents and their layout to be embedded into a page template without obliging the manager of display information to edit any HTML file or modify server programs such as CGI. It is also made possible to dynamically alter contents and their layout to be embedded into a page template according to the circumstances of accessing by a user. It is further made possible to provide information seeming to fit each user's preference only to that particular user or a group including that user and to enhance the effect of advertisement or the like.

What is Claimed is:

- 5 (1) A display information fixing method to be executed on a display information fixing apparatus for transmitting page information to an information terminal having a display screen and an input unit, comprising the steps of:

(a) analyzing a page template specified by a display information acquisition request from said information terminal,

10 (b) acquiring formatter specifying information and display attribute information from said page template,

(c) acquiring a formatter on the basis of said formatter specifying information, and

15 (d) processing contents to be incorporated into said page template on the basis of said display attribute, to generate page information to be displayed on the display apparatus of said information terminal.

- 20 (2) A display information fixing method to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, comprising the steps of:

25 (a) analyzing a page template specified by a display information acquisition request from said information terminal,

(b) acquiring formatter specifying information and display attribute information from said page template,

(c) acquiring a formatter on the basis of said formatter specifying information,

(d) acquiring information on a plurality of contents to be displayed on said page template, and

5 (e) generating, if it is judged that said display attributes include one indicating rotation, page information including information on a first content among said plurality of contents and for generating, after the lapse of a prescribed length of time, page
10 information including information on a second content among said plurality of contents.

(3) A display information fixing method to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, comprising the steps
15 of:

(a) analyzing a page template specified by a display information acquisition request from said information terminal,

20 (b) acquiring formatter specifying information and display attribute information from said page template,

(c) acquiring a formatter on the basis of said formatter specifying information,

25 (d) acquiring information on a plurality of contents to be displayed on said page template, and

(e) excluding, if it is judged that said display attributes include one indicating random, information on a first content among said plurality of contents and for

generating page information including information on a second content among said plurality of contents.

- 5 (4) A display information fixing method to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, comprising the steps of:

10 (a) analyzing a page template specified by a display information acquisition request from said information terminal,

(b) acquiring formatter specifying information and display attribute information from said page template,

(c) acquiring a formatter on the basis of said formatter specifying information,

15 (d) acquiring information on any content to be displayed on said page template,

(e) acquiring size information on a display area predefined to display the content from said page template,

20 (f) comparing the size information on said display area and the size information on said acquired content, and

25 (g) adjusting, if it is judged that the size information on said display area has a greater value than the size information on said acquired content and said display attributes include one to instruct adjusted displaying, the size of said display area to the size of said content and generating page information.

5 (5) A display information fixing method to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, comprising the steps of:

(a) analyzing a page template specified by a display information acquisition request from said information terminal,

10 (b) acquiring formatter specifying information and display attribute information from said page template,

(c) acquiring a formatter on the basis of said formatter specifying information,

(d) searching for information on a content to be displayed on said page template,

15 (e) judging, if it is judged that there is no content to be displayed, whether or not information on default contents is defined in said page template, and

20 (f) generating, if any information on default contents exists, page information including said information on default contents.

25 (6) A display information fixing method to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit, comprising the steps of:

(a) analyzing a page template specified by a display information acquisition request from said information terminal,

(b) acquiring from said page template formatter specifying information and display attribute information on a formatter to control the arrangement of a plurality of contents,

5 (c) acquiring a formatter on the basis of said formatter specifying information,

(d) searching for information on a plurality of contents to be displayed on said page template, and

10 (e) generating page information on the arrangement of said contents on the basis of information indicating the direction of arrangement contained in said display attributes.

(7) A display information fixing means for transmitting page information to an information terminal having a display screen and an input unit, comprising:

15 (a) an means for analyzing a page template specified by a display information acquisition request from said information terminal,

20 (b) an means for acquiring from said page template formatter specifying information and display attribute information,

(c) an means for acquiring a formatter on the basis of said formatter specifying information, and

25 (d) an means for processing, on the basis of said display attributes, contents to be incorporated into said page template and to generate page information to be displayed on the display unit of said information

terminal.

- (8) A display information fixing means for transmitting page information to an information terminal having a display screen and an input unit, comprising:

5 (a) an means for analyzing a page template specified by a display information acquisition request from said information terminal,

(b) an means for acquiring formatter specifying information from said page template,

10 (c) an means for acquiring a formatter on the basis of said formatter specifying information, and

(d) an means for transmitting a formatter, together with said page template, to said information terminal to process, on the basis of said display attributes, contents to be incorporated into said page template and for generating page information to be displayed on the display unit of said information terminal.

15 (9) A storage medium storing a display information fixing program to be executed on a display information fixing apparatus for transmitting page information to an information terminal having a display screen and an input unit,

the program comprising:

20 (a) a program code for instructing analysis of a page template specified by a display information acquisition request from said information terminal,

(b) a program code for instructing acquisition of

formatter specifying information and display attribute information from said page template,

5 (c) a program code for instructing acquisition of a formatter on the basis of said formatter specifying information, and

10 (d) a program code for instructing processing of contents to be incorporated into said page template on the basis of said display attributes and generation of page information to be displayed on the display apparatus of said information terminal.

15 (10) A storage medium storing a display information fixing program to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit,
the program comprising:

(a) a program code for instructing analysis of a page template specified by a display information acquisition request from said information terminal,

20 (b) a program code for instructing acquisition of formatter specifying information and display attribute information from said page template,

25 (c) a program code for instructing acquisition of a formatter on the basis of said formatter specifying information,

(d) a program code for instructing acquisition of information on a plurality of contents to be displayed on said page template, and

(e) a program code for instructing, if it is judged that said display attributes include one indicating rotation, generation of page information including information on a first content among said plurality of contents and, after the lapse of a prescribed length of time, generation of page information including information on a second content among said plurality of contents.

(11) A storage medium storing a display information fixing program to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit,

the program comprising:

(a) a program code for instructing analysis of a page template specified by a display information acquisition request from said information terminal,

(b) a program code for instructing acquisition of formatter specifying information and display attribute information from said page template,

(c) a program code for instructing acquisition of a formatter on the basis of said formatter specifying information,

(d) a program code for instructing acquisition of information on a plurality of contents to be displayed on said page template, and

(e) a program code for instructing exclusion, if it is judged that said display attributes include one indicating random, of information on a first content

among said plurality of contents and generation of page information including information on a second content among said plurality of contents.

- 5 (12) A storage medium storing a display information fixing program to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit,

the program comprising:

10 (a) a program code for instructing analysis of a page template specified by a display information acquisition request from said information terminal,

15 (b) a program code for instructing acquisition of formatter specifying information and display attribute information from said page template,

(c) a program code for instructing acquisition of a formatter on the basis of said formatter specifying information,

20 (d) a program code for instructing acquisition of information on any content to be displayed on said page template,

(e) a program code for instructing acquisition of size information on a display area predefined to display the content from said page template,

25 (f) a program code for instructing comparison of the size information on said display area with the size information on said acquired content, and

(g) a program code for instructing, if it is judged that the size information on said display area has a greater value than the size information on said acquired content and said display attributes include one to instruct adjusted displaying, adjustment of the size of said display area to the size of said content and for generating page information.

(13) A storage medium storing a display information fixing program to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit,

the program comprising:

(a) a program code for instructing analysis of a page template specified by a display information acquisition request from said information terminal,

(b) a program code for instructing acquisition of formatter specifying information and display attribute information from said page template,

(c) a program code for instructing acquisition of a formatter on the basis of said formatter specifying information,

(d) a program code for instructing searching for information on a content to be displayed on said page template,

(e) a program code for instructing, if it is judged that there is no content to be displayed, judgment of whether or not information on default contents is defined in said page template, and

(f) a program code for instructing, if any information on default contents exists, generation of page information including said information on default contents.

- 5 (14) A storage medium storing a display information fixing program to be executed on a display information fixing apparatus for transmitting display information to an information terminal having a display screen and an input unit,

10 the program comprising:

(a) a program code for instructing analysis of a page template specified by a display information acquisition request from said information terminal,

15 (b) a program code for instructing acquisition of formatter specifying information and display attribute information on a formatter to control the arrangement of a plurality of contents from said page template,

20 (c) a program code for instructing acquisition of a formatter on the basis of said formatter specifying information,

(d) a program code for instructing searching for information on a plurality of contents to be displayed on said page template, and

25 (e) a program code for instructing generation of page information on the arrangement of said contents on the basis of information indicating the direction of arrangement contained in said display attributes.

Abstract of the Invention

A page template, which serves as the prototype of a web page, contains formatter specifying information and display attribute information. The formatter specifying information is information for specifying one formatter out of a plurality of types (banner, Telop, a plurality of banner arrangements or the like). Display attribute information is information for controlling the moves of the formatter. When a page template is called by a web browser, the formatter is actuated, and selects, arranges, or controls the display sequence, display time or the like of, contents to be embedded into the template in accordance with display attributes, or effects such controls as the reduction of a display area (an area in the template available for embedding contents) to the size of contents.

FIG. 1

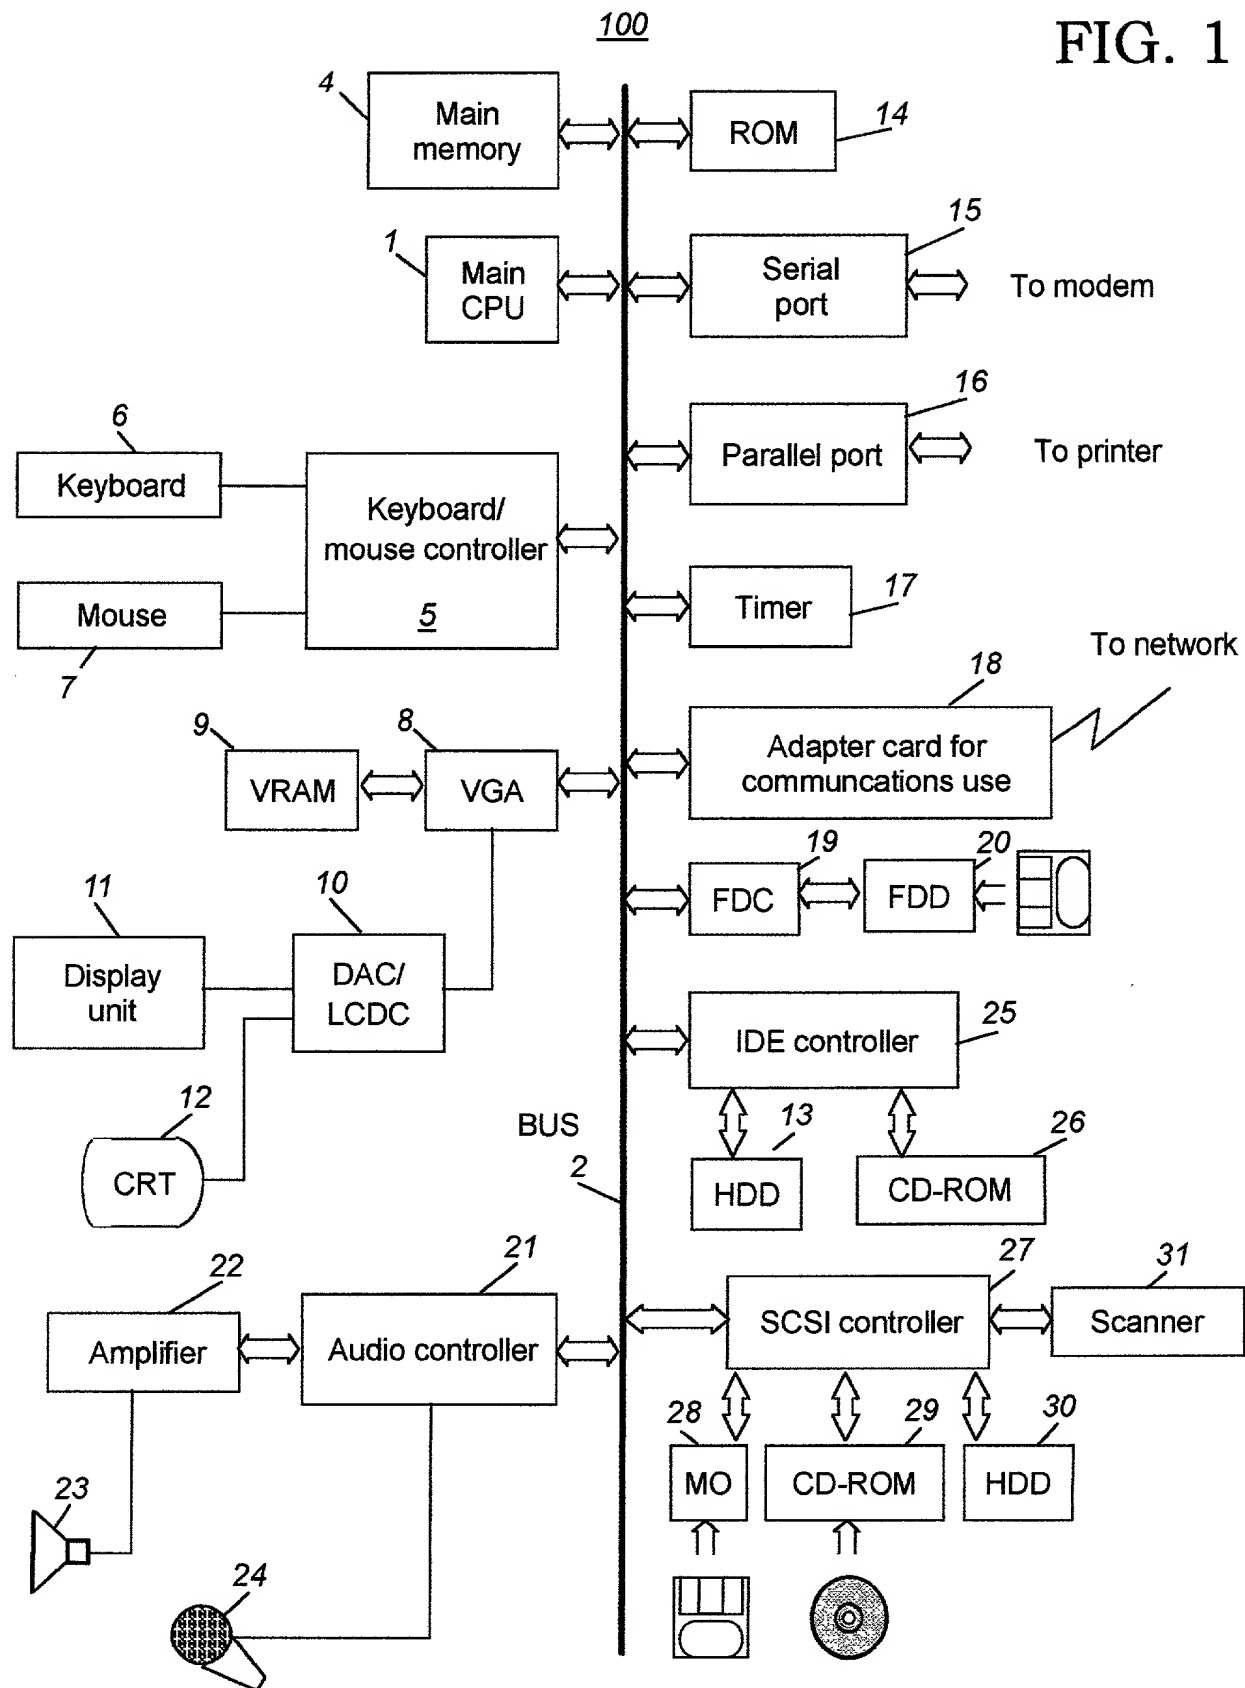


FIG. 2A

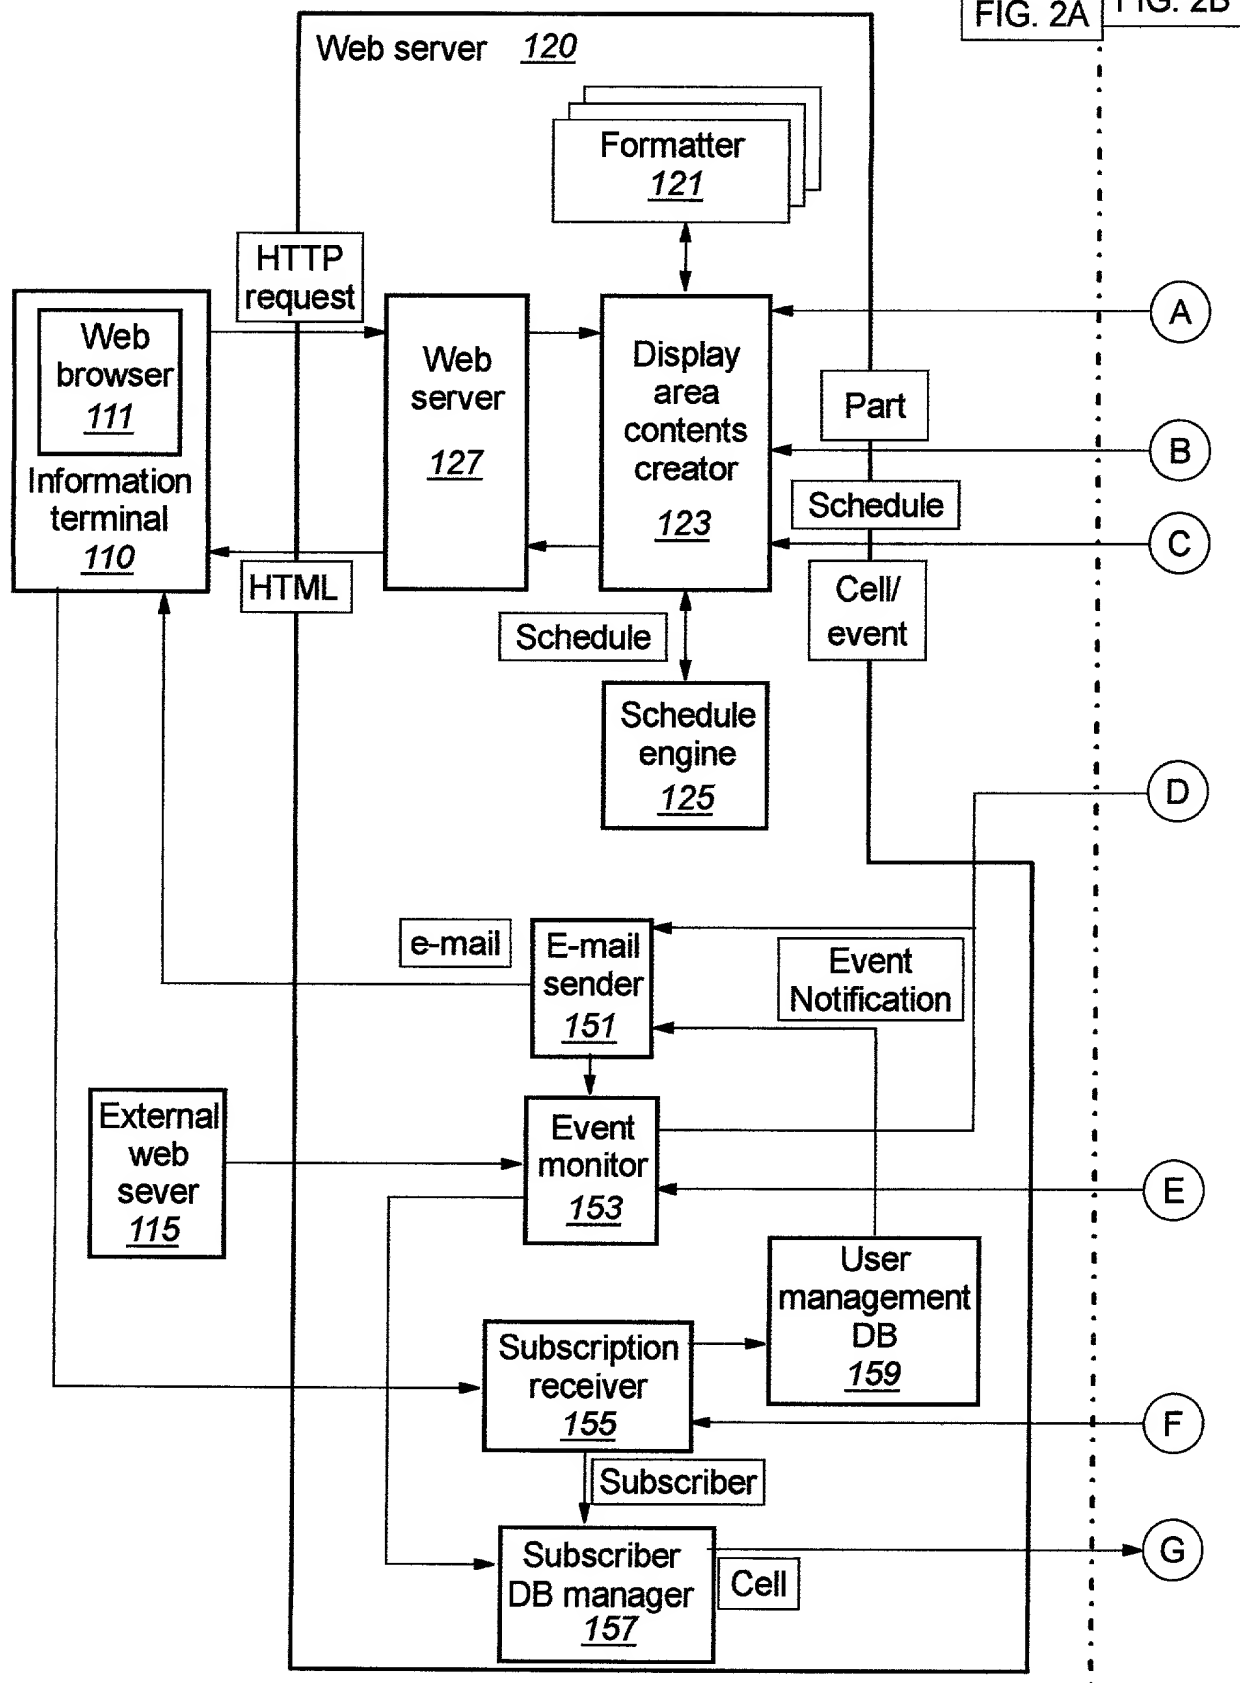


FIG. 2B

FIG. 2A

FIG. 2B

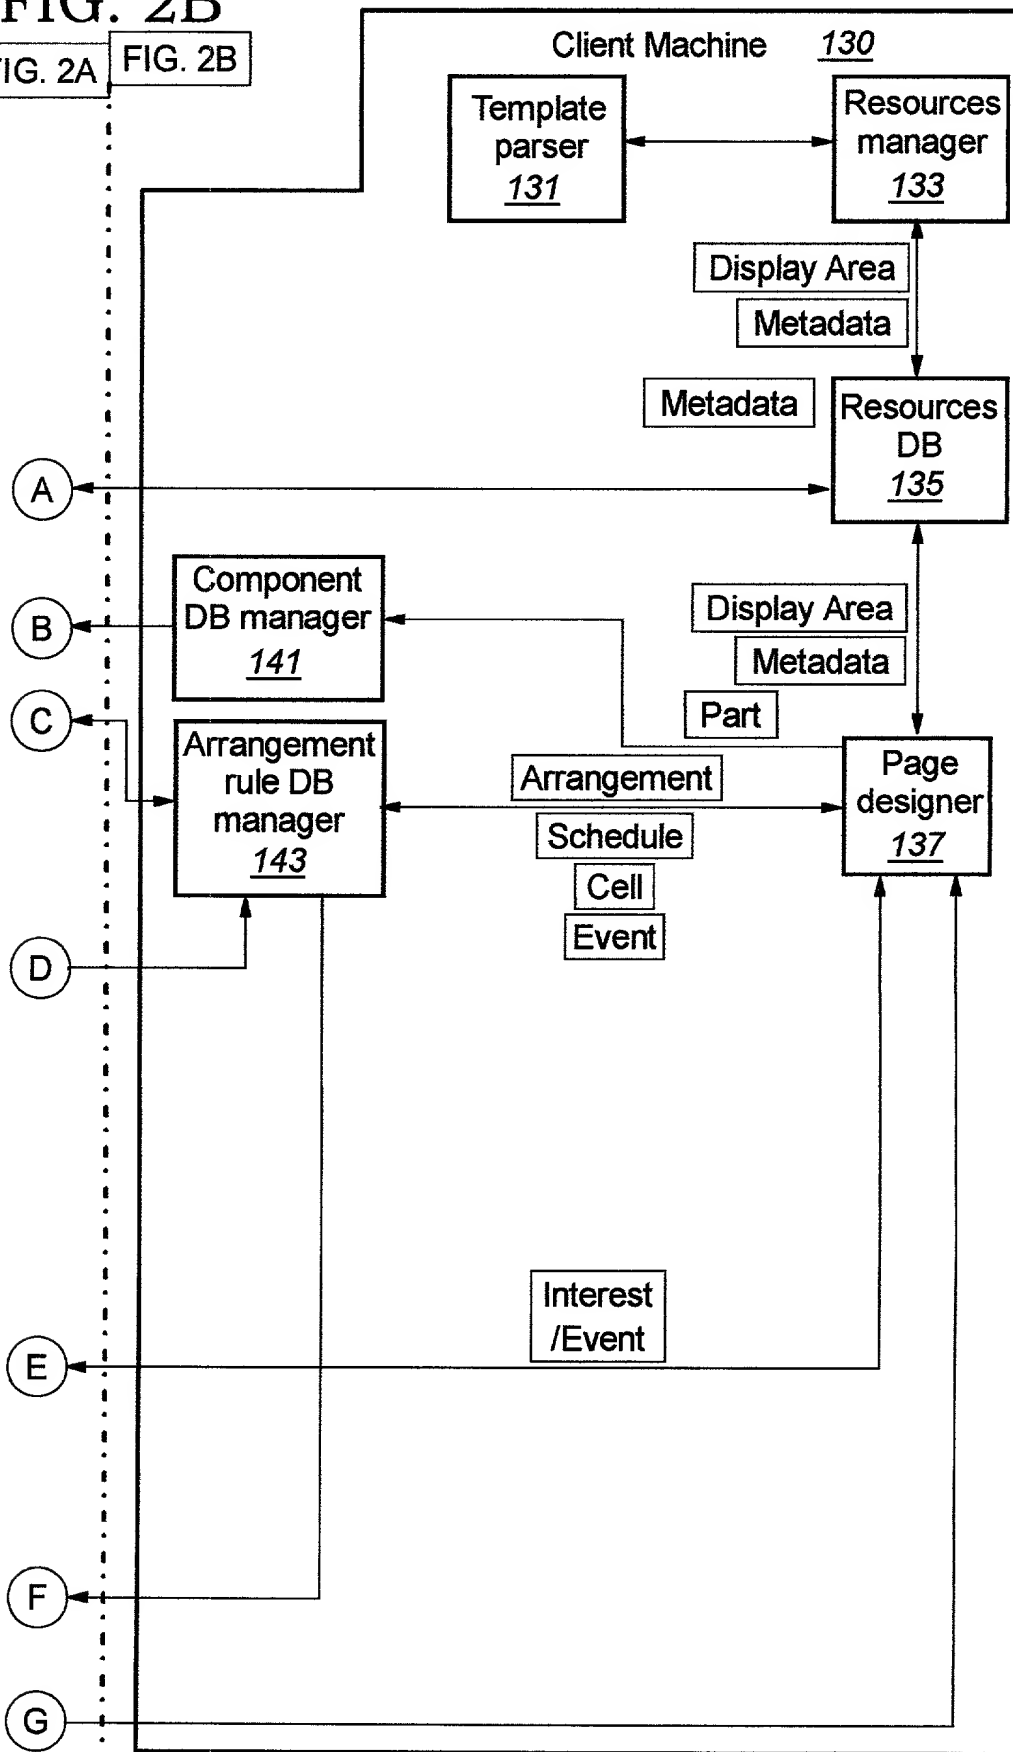


FIG. 3

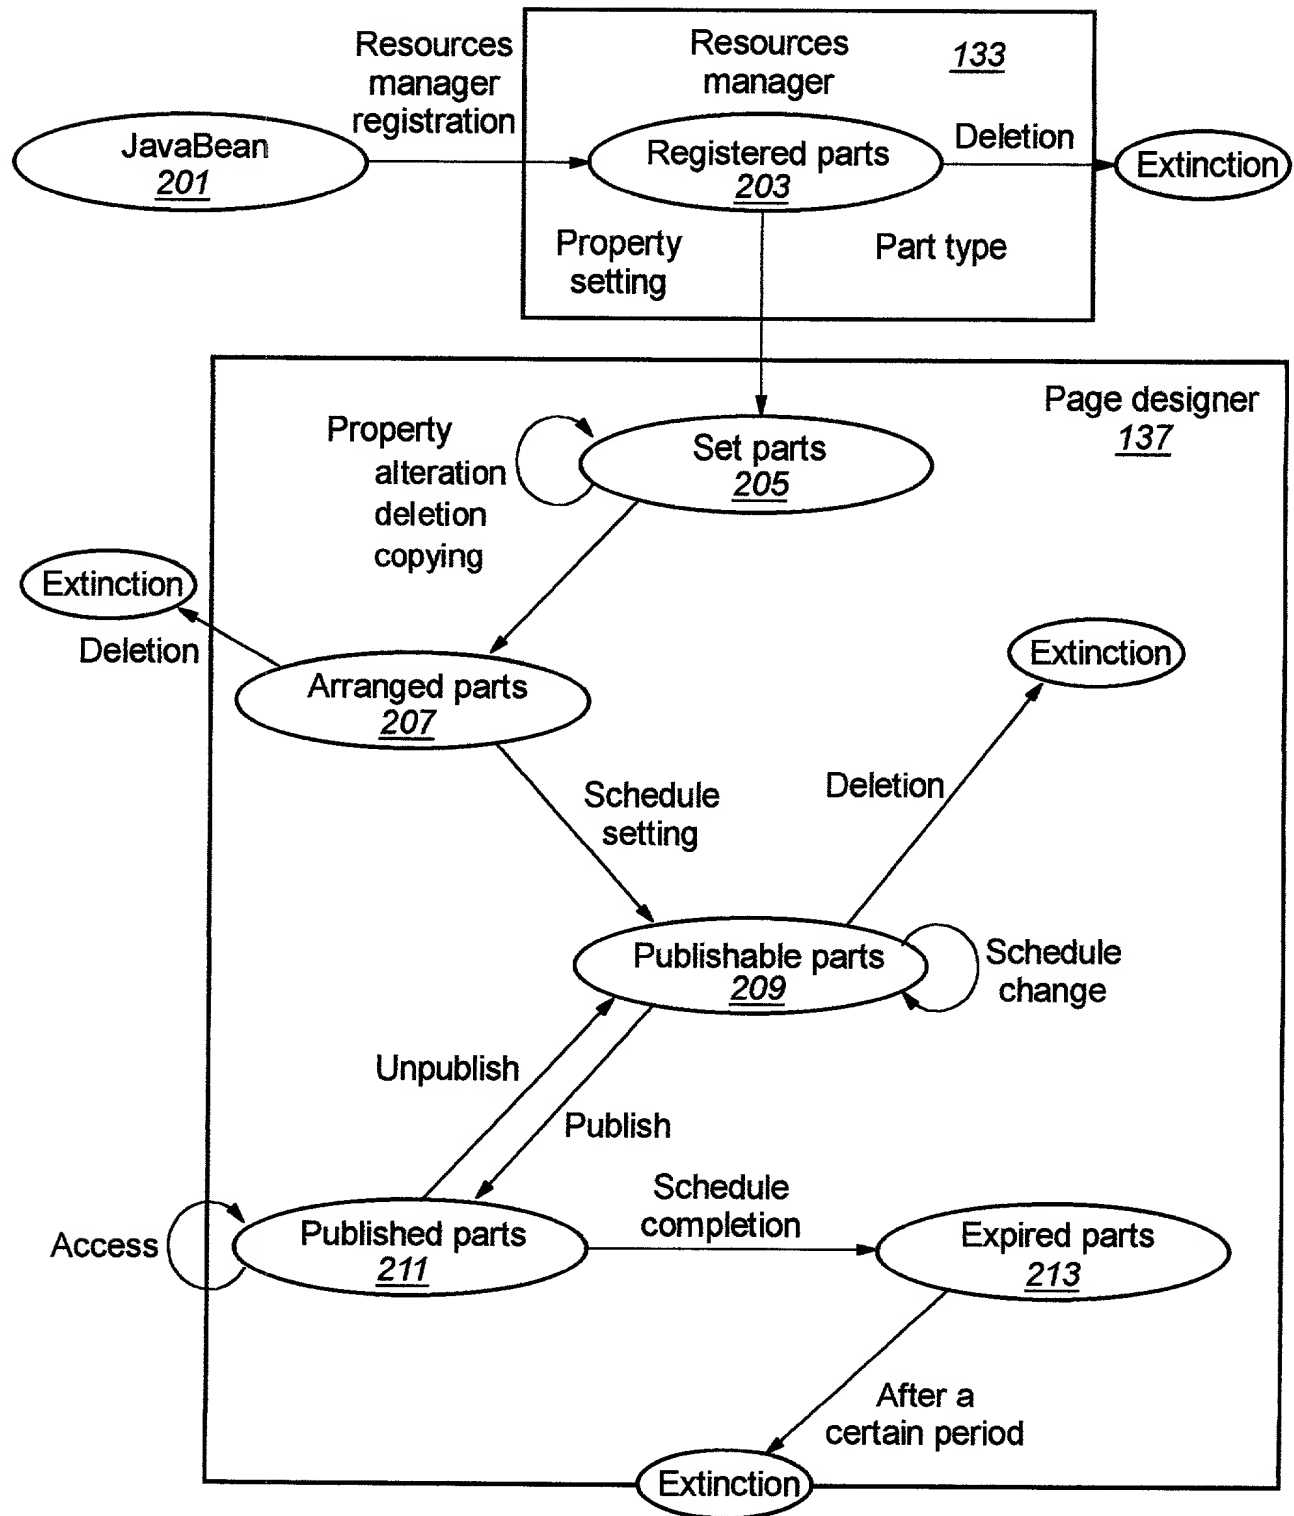


FIG. 4

Contents creator

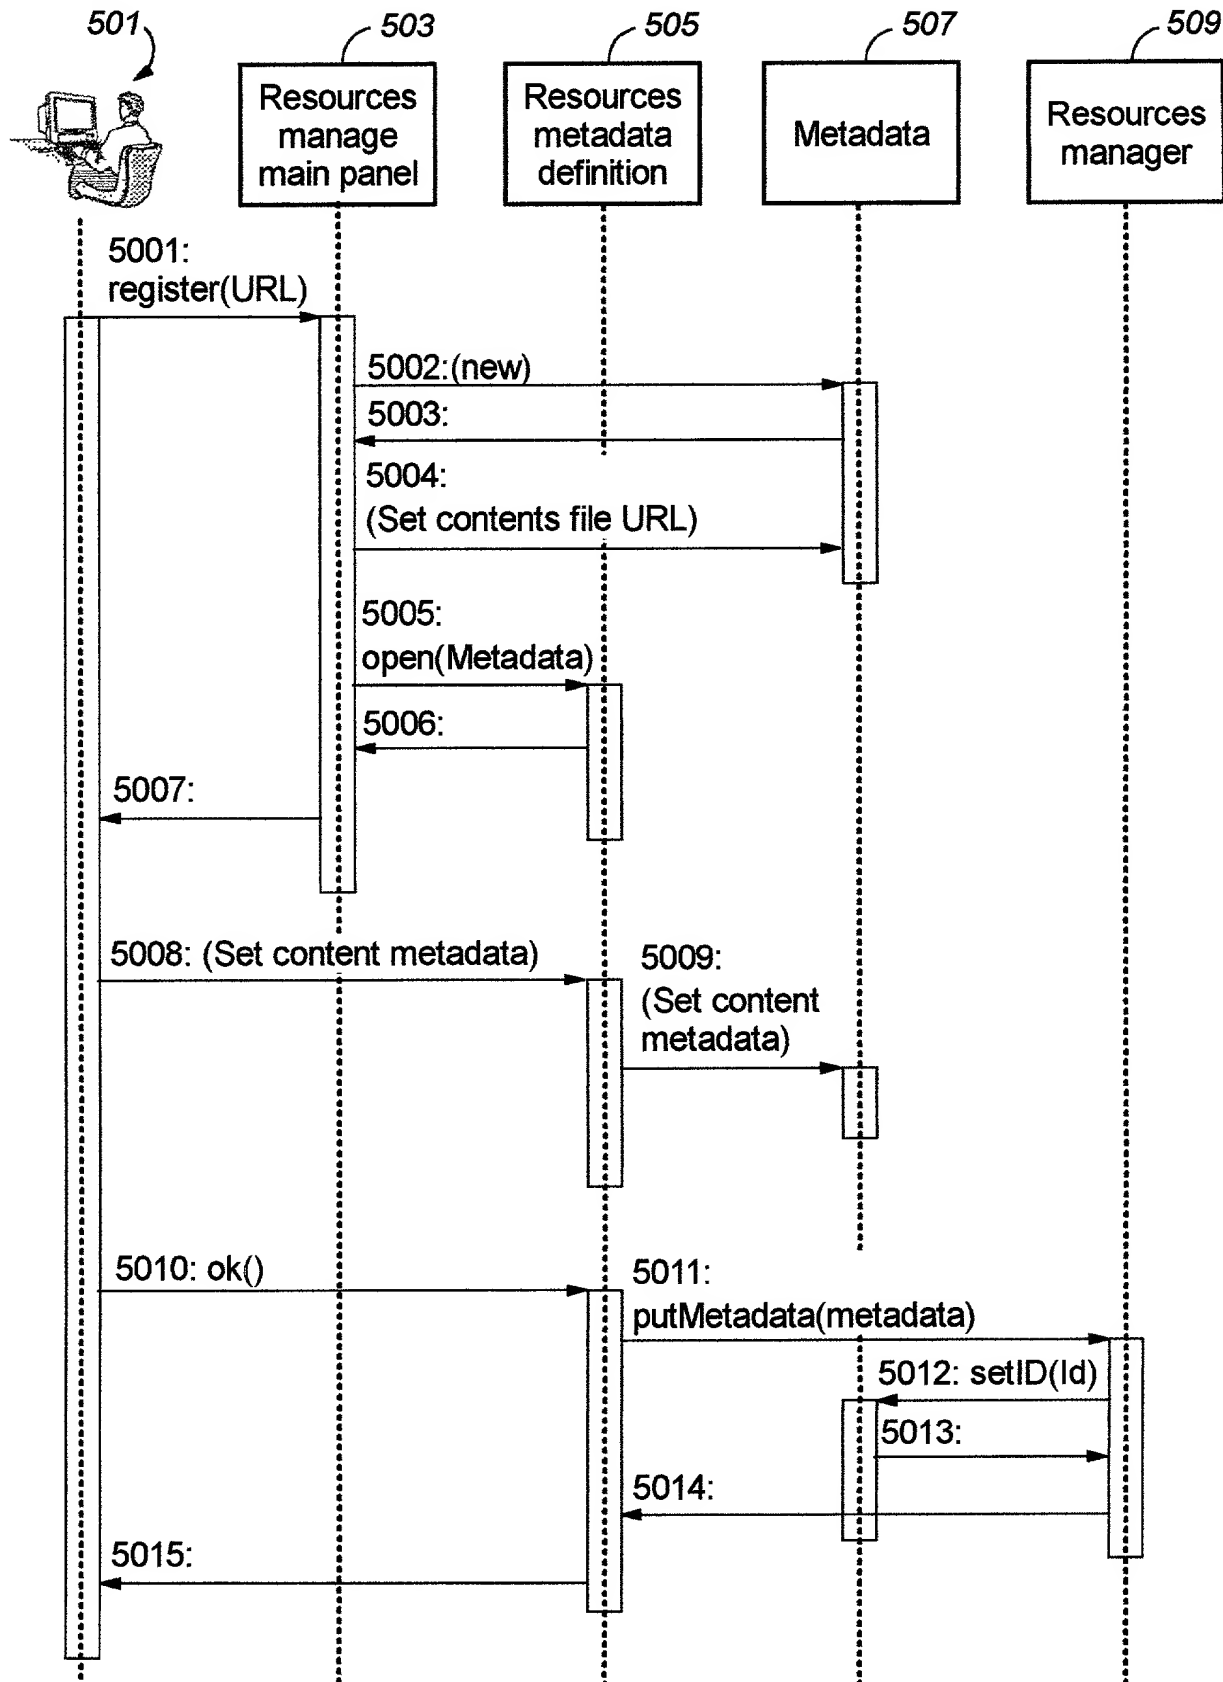


FIG. 5

Contents creator

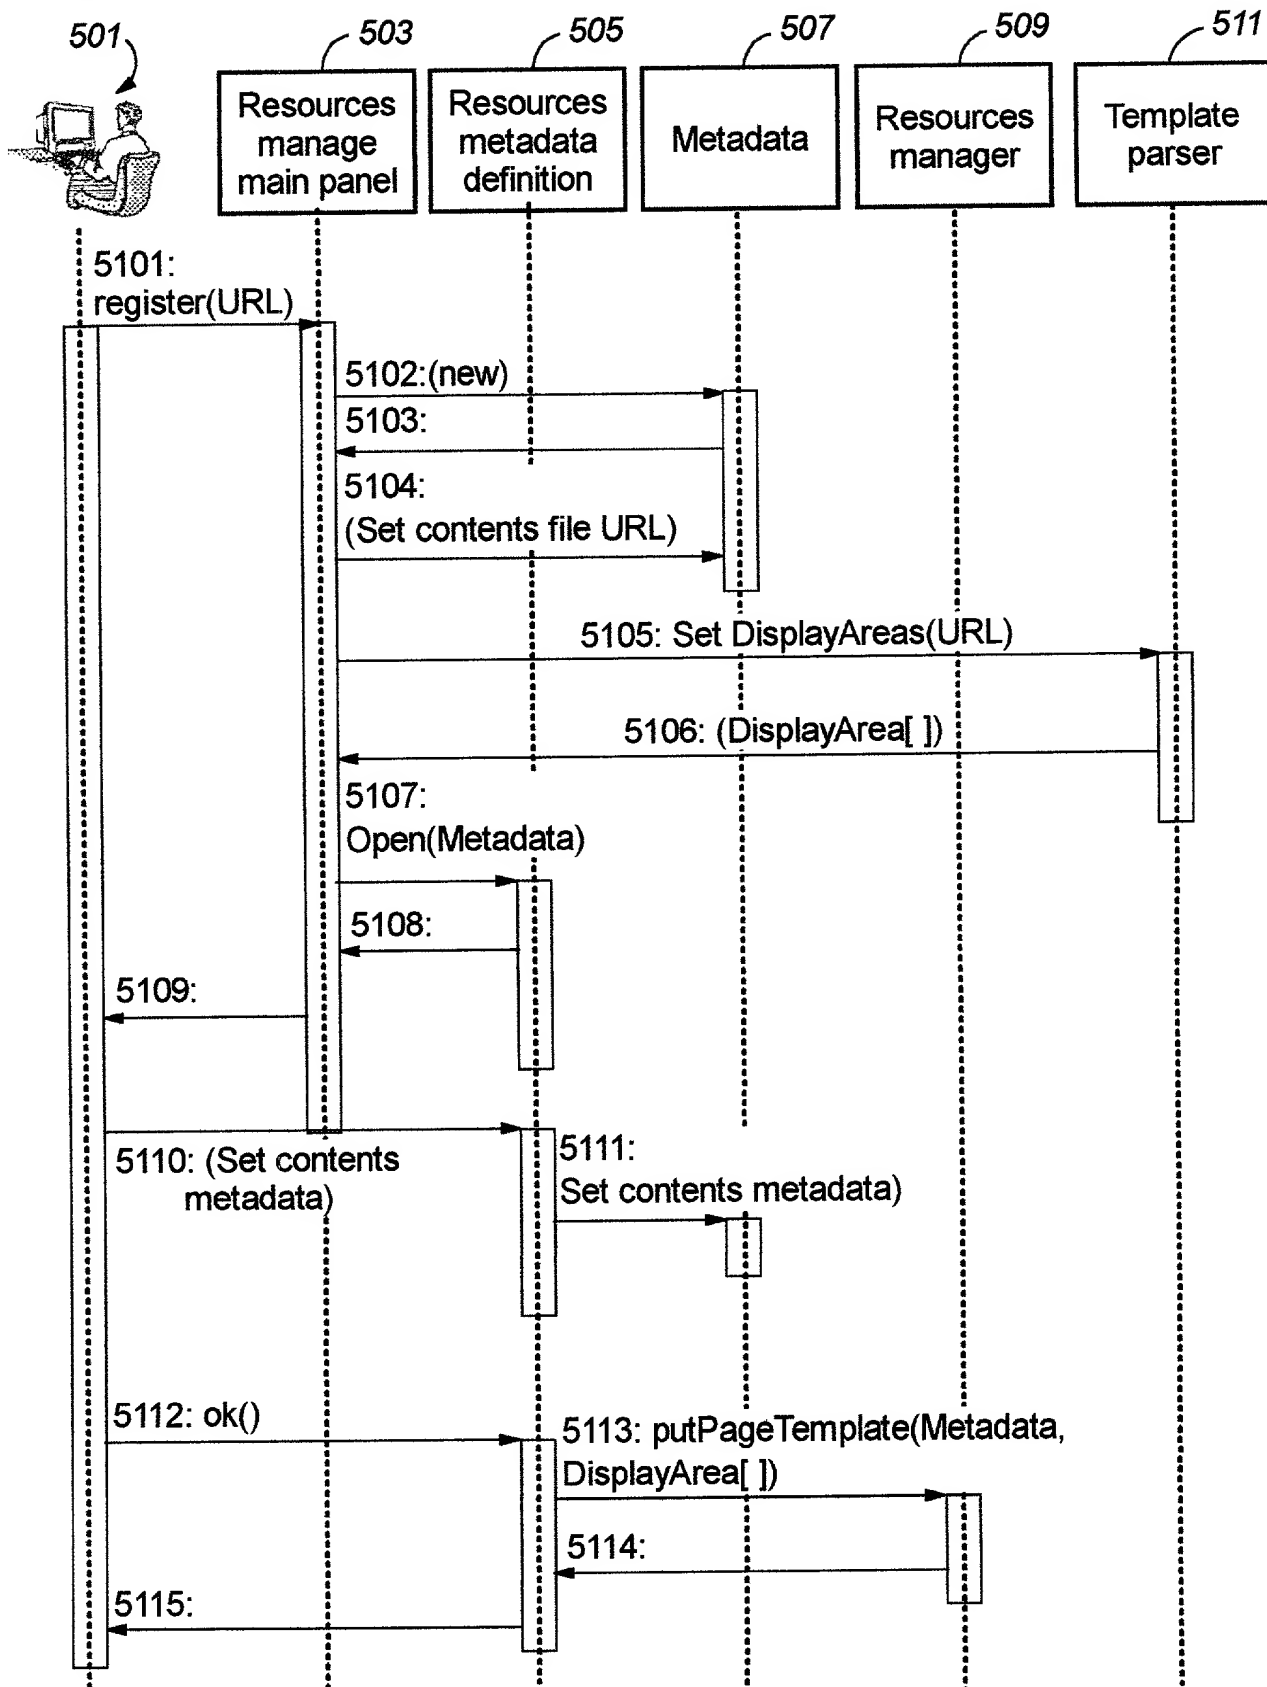


FIG. 6

Contents creator




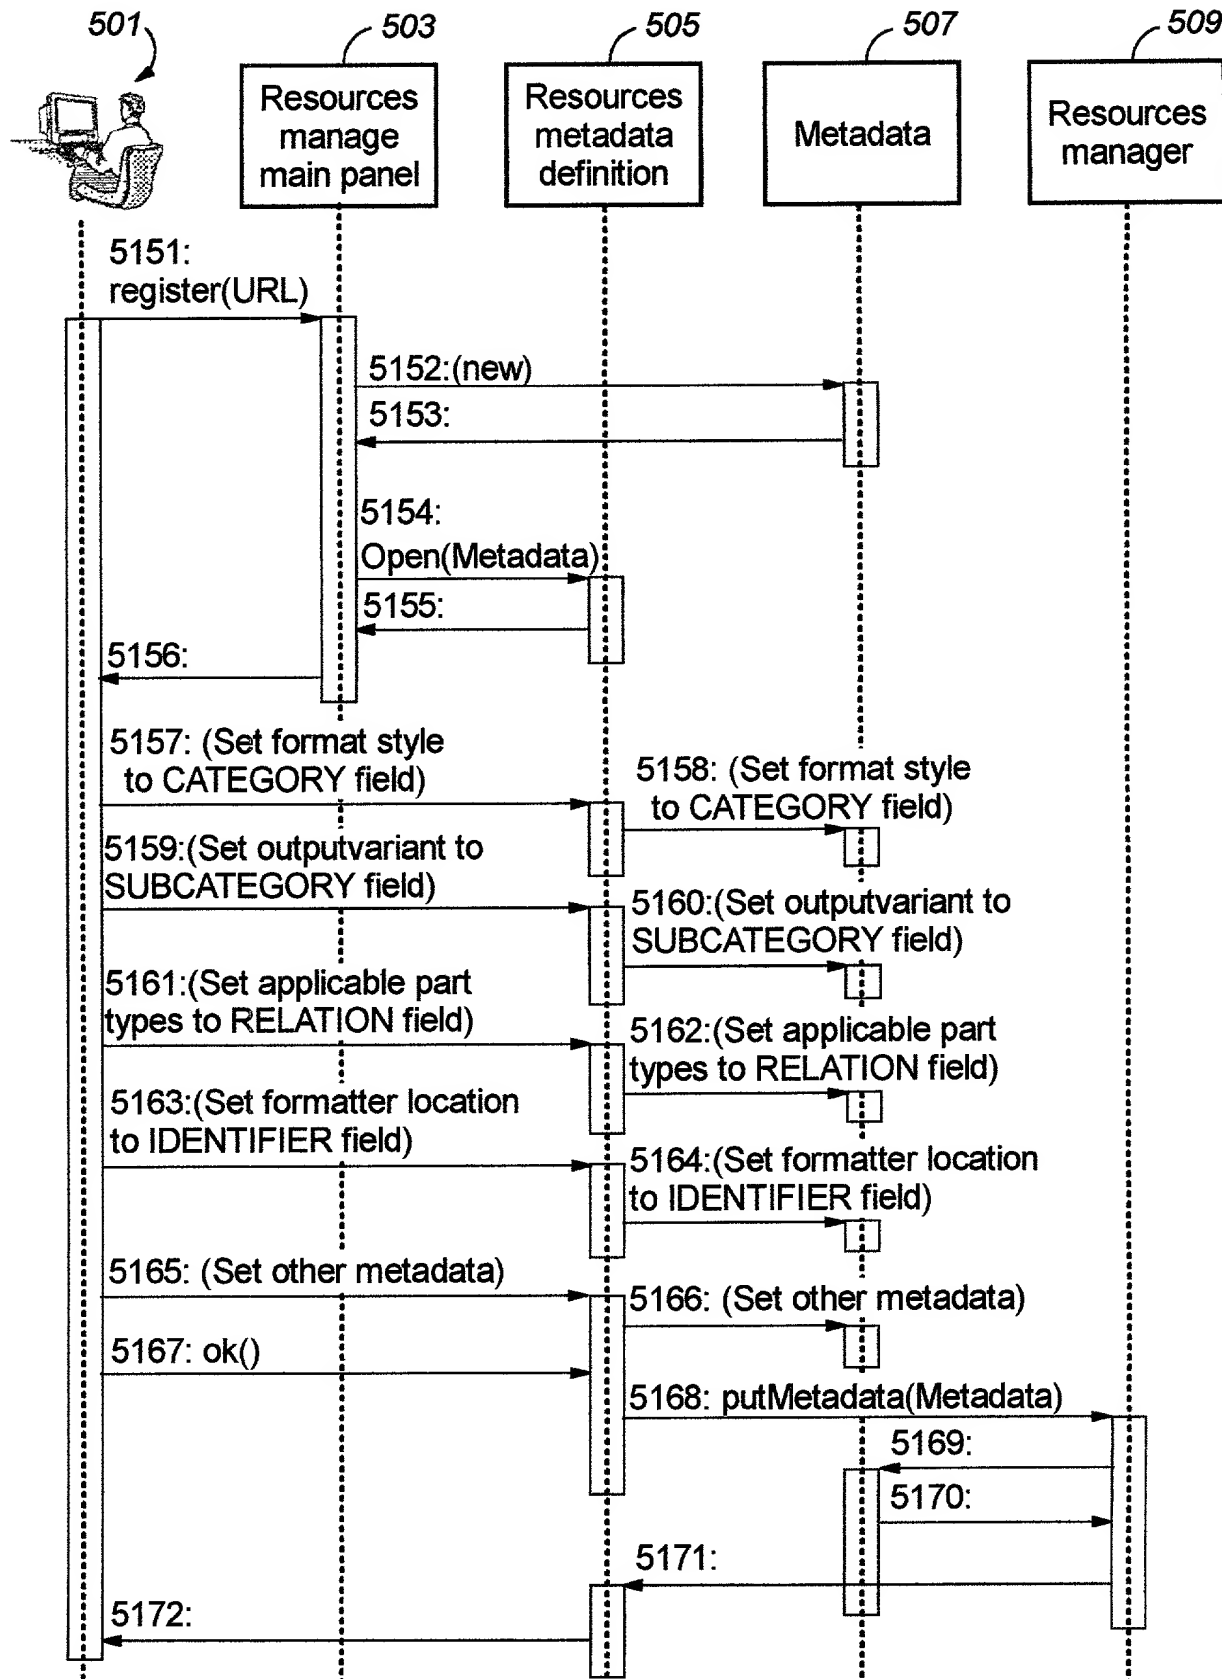


FIG. 7

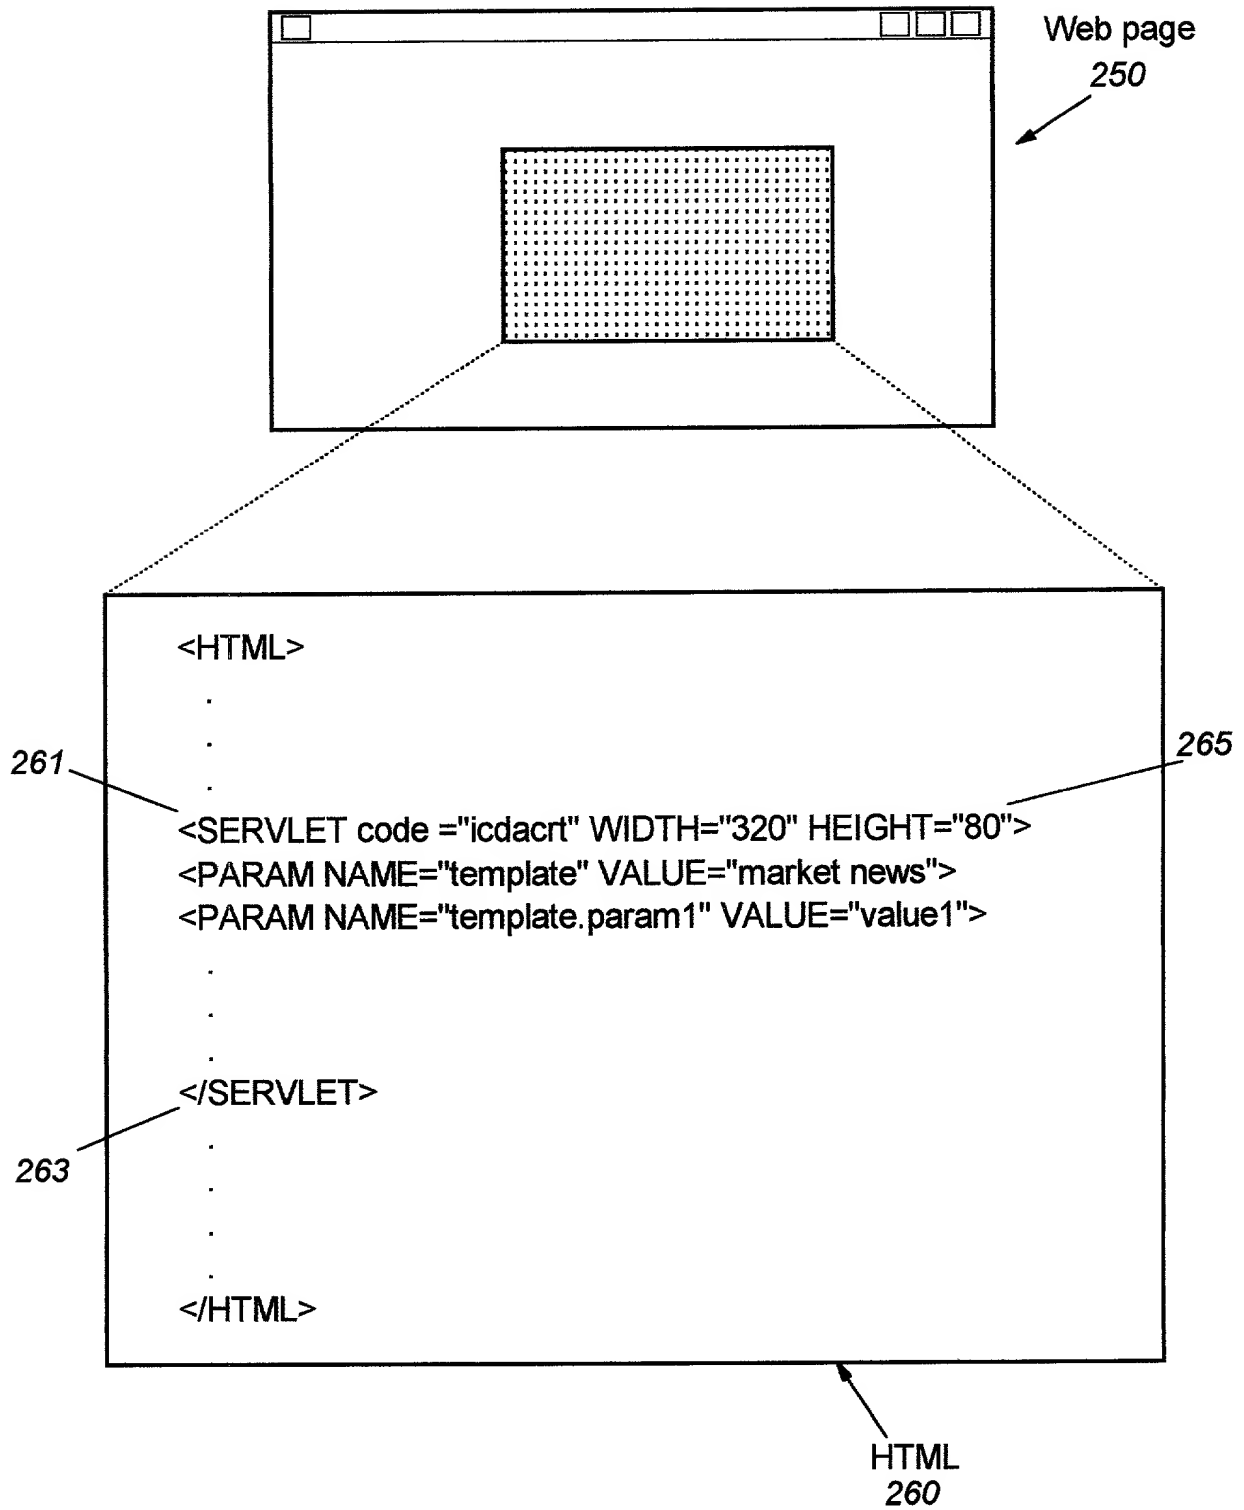

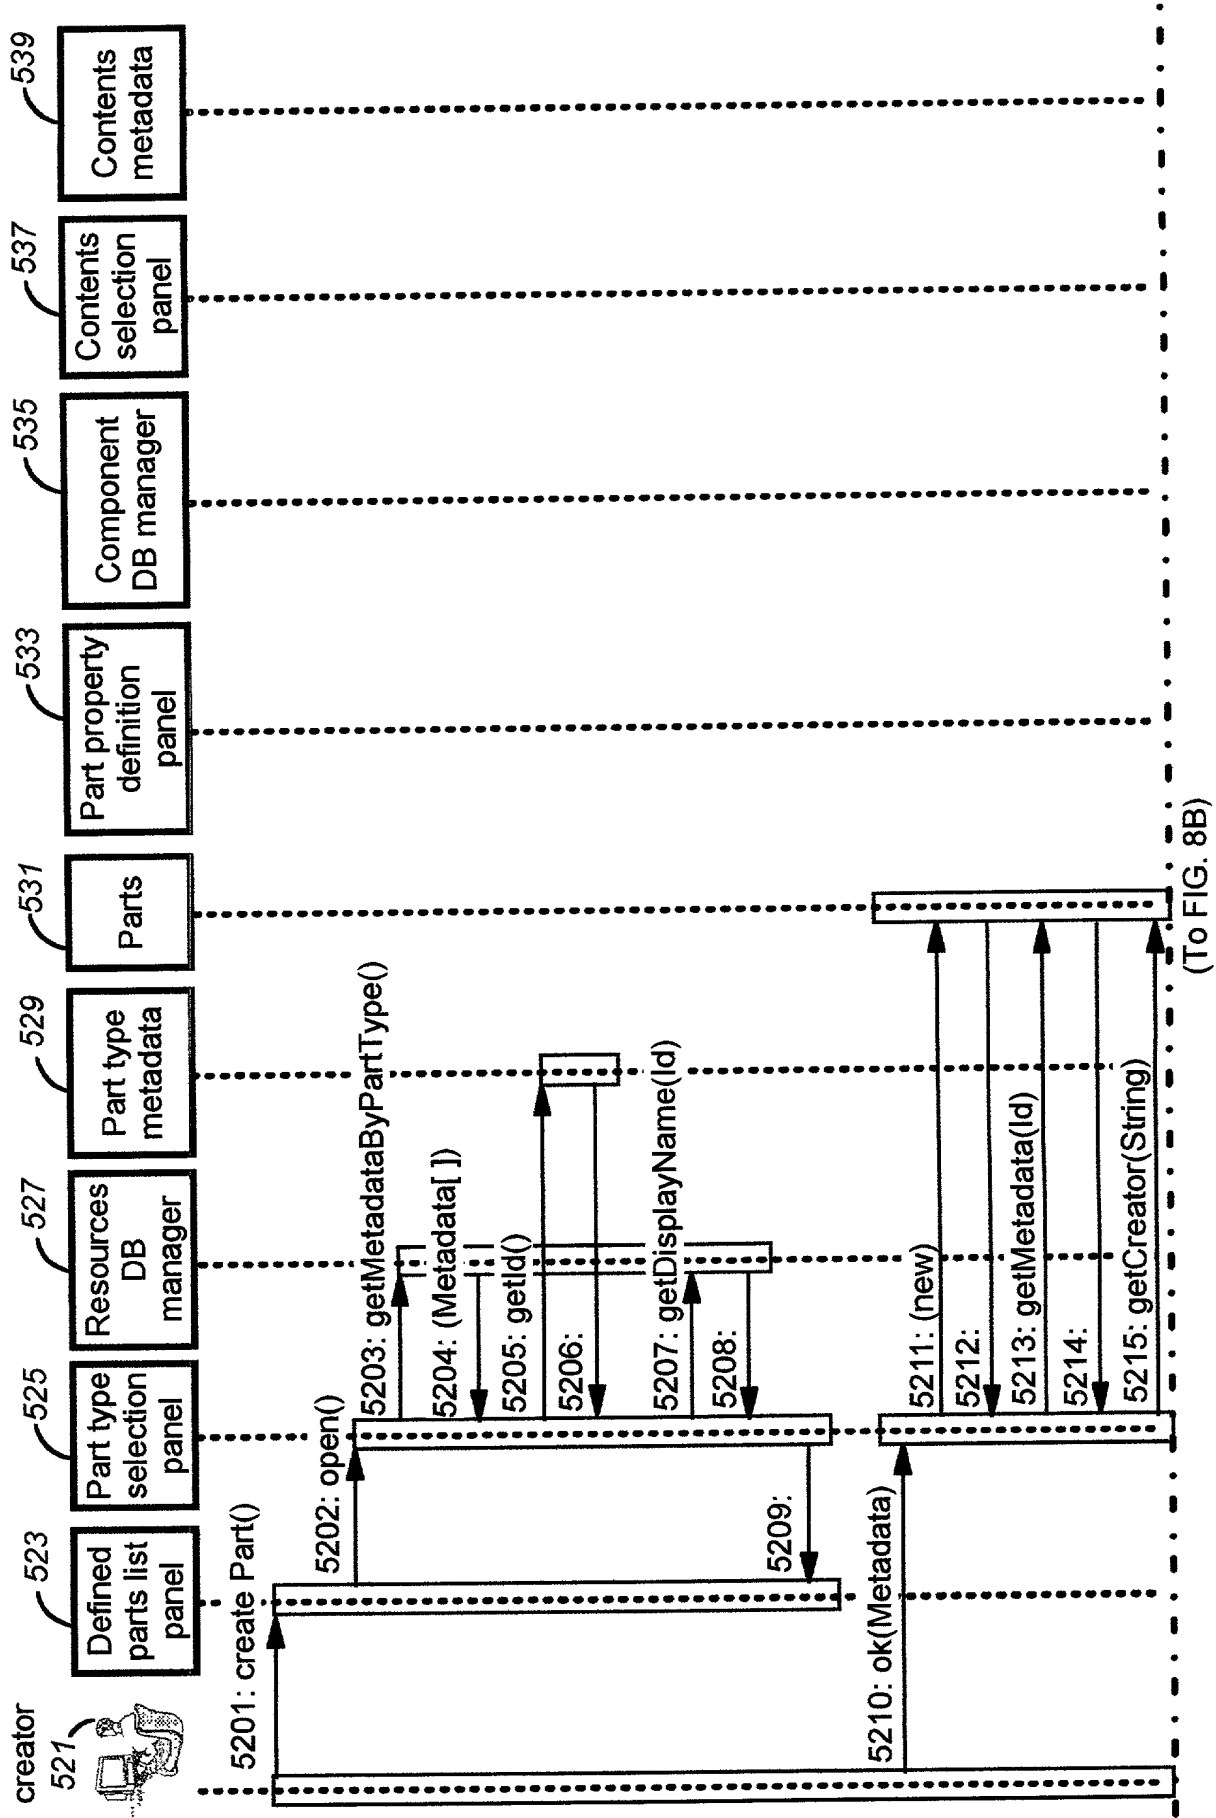

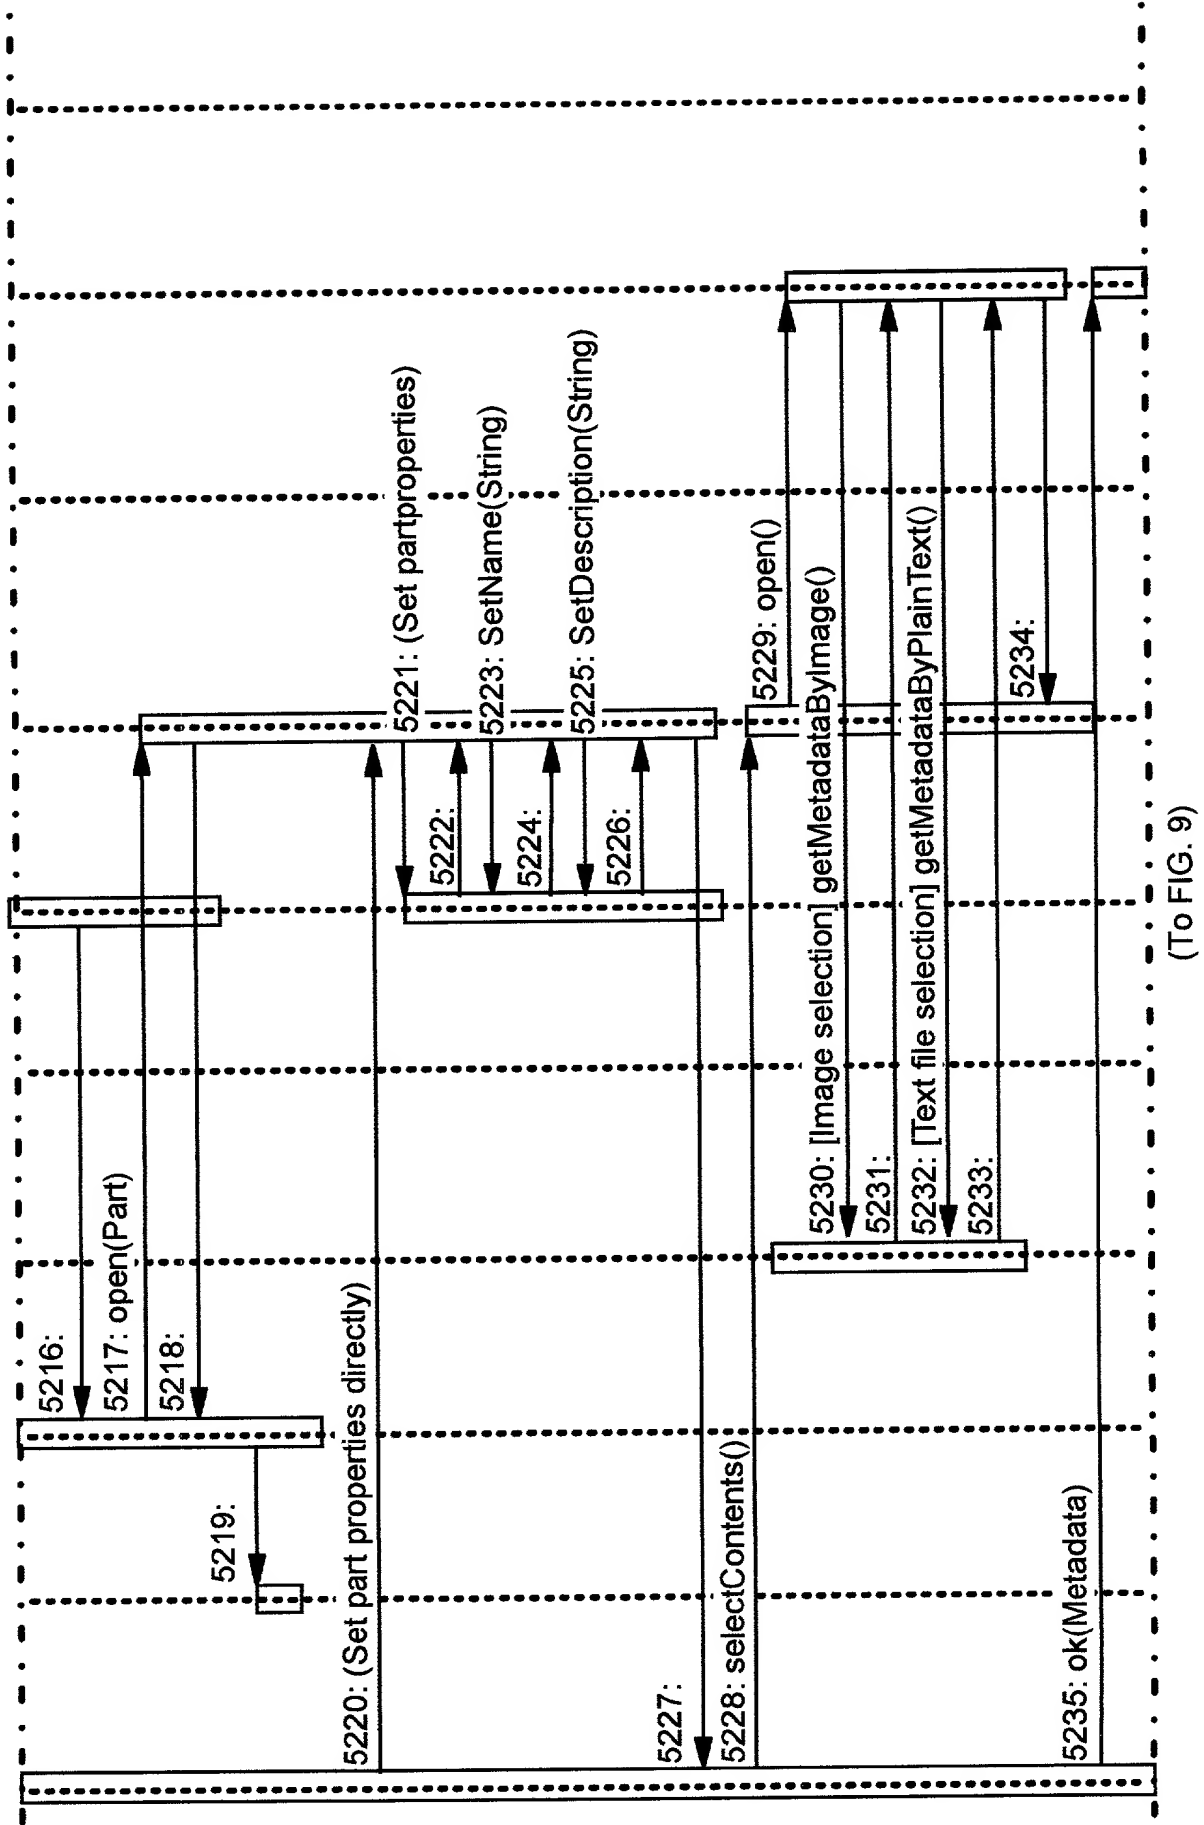

(To FIG. 9)

FIG. 9

(From FIG. 8B)

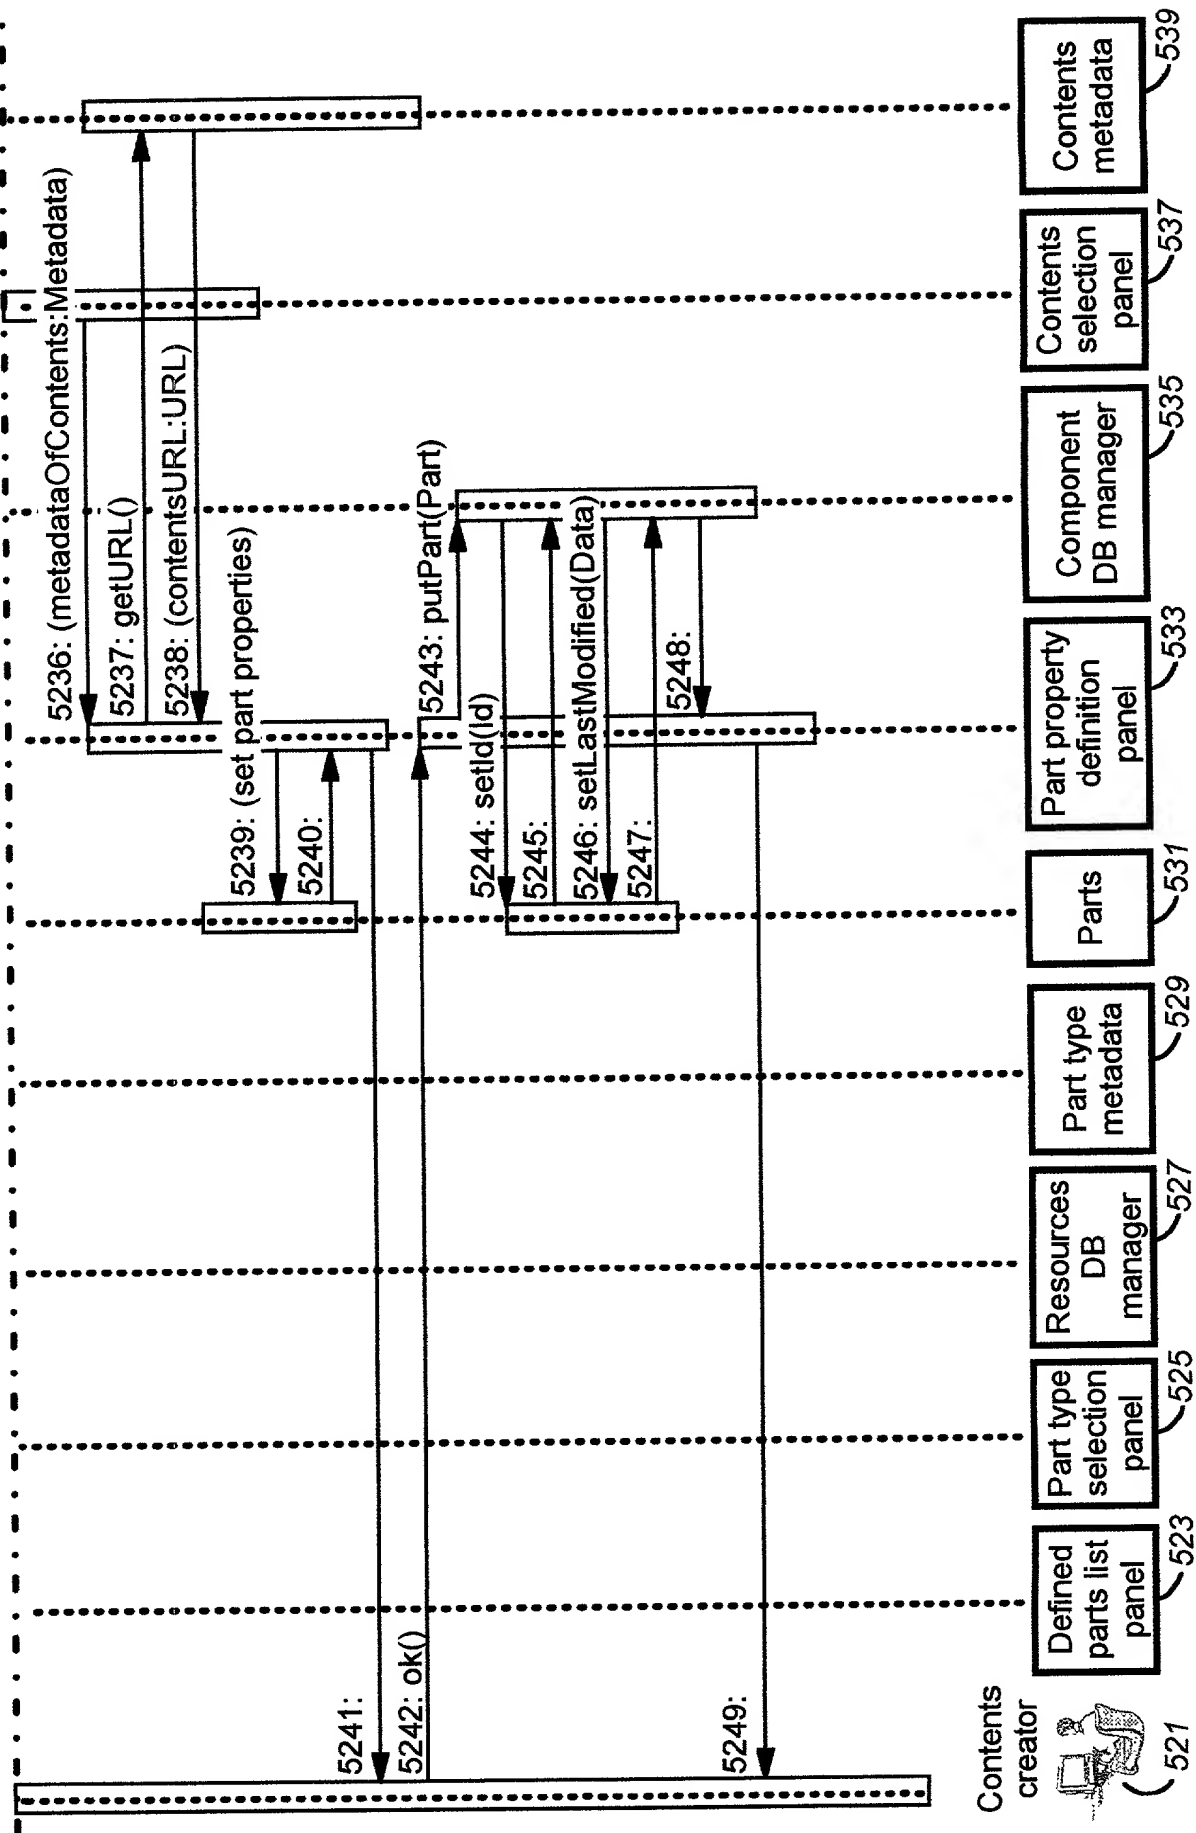


FIG. 10

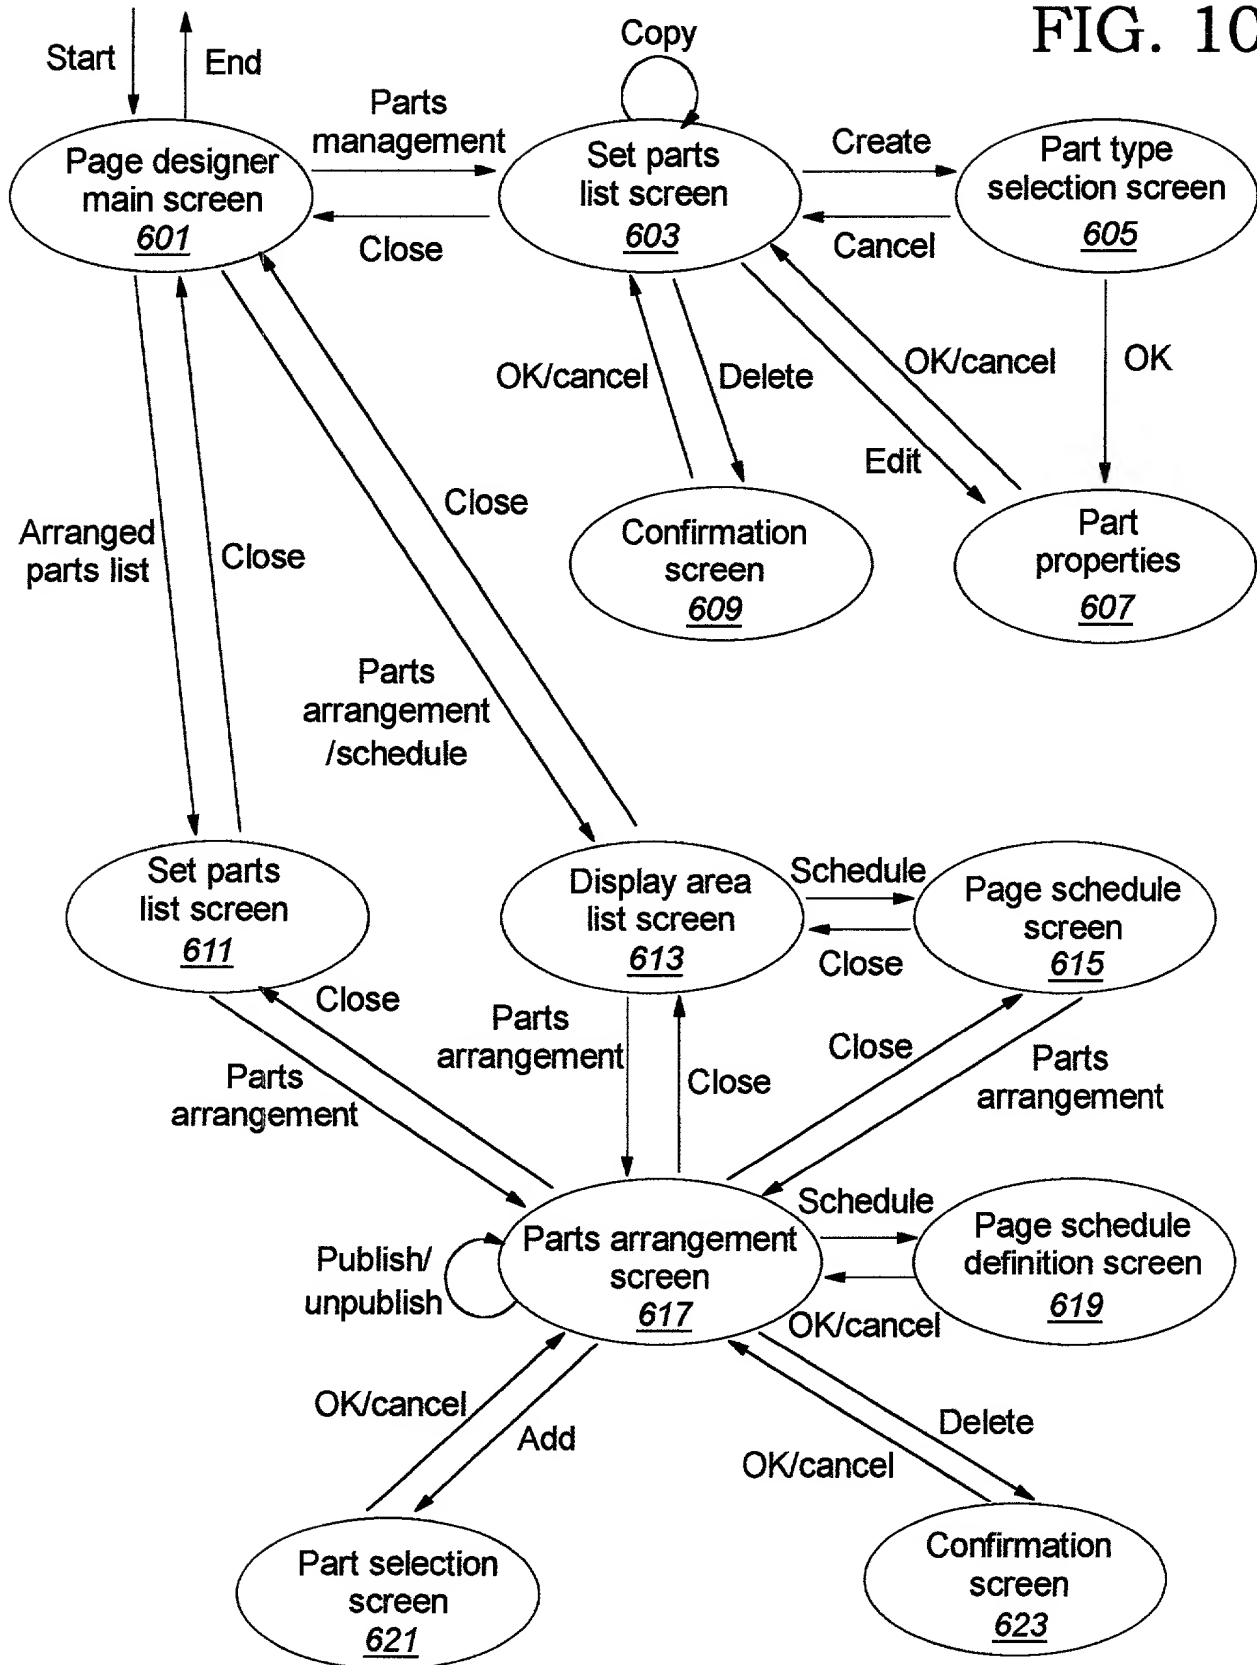


FIG. 11A


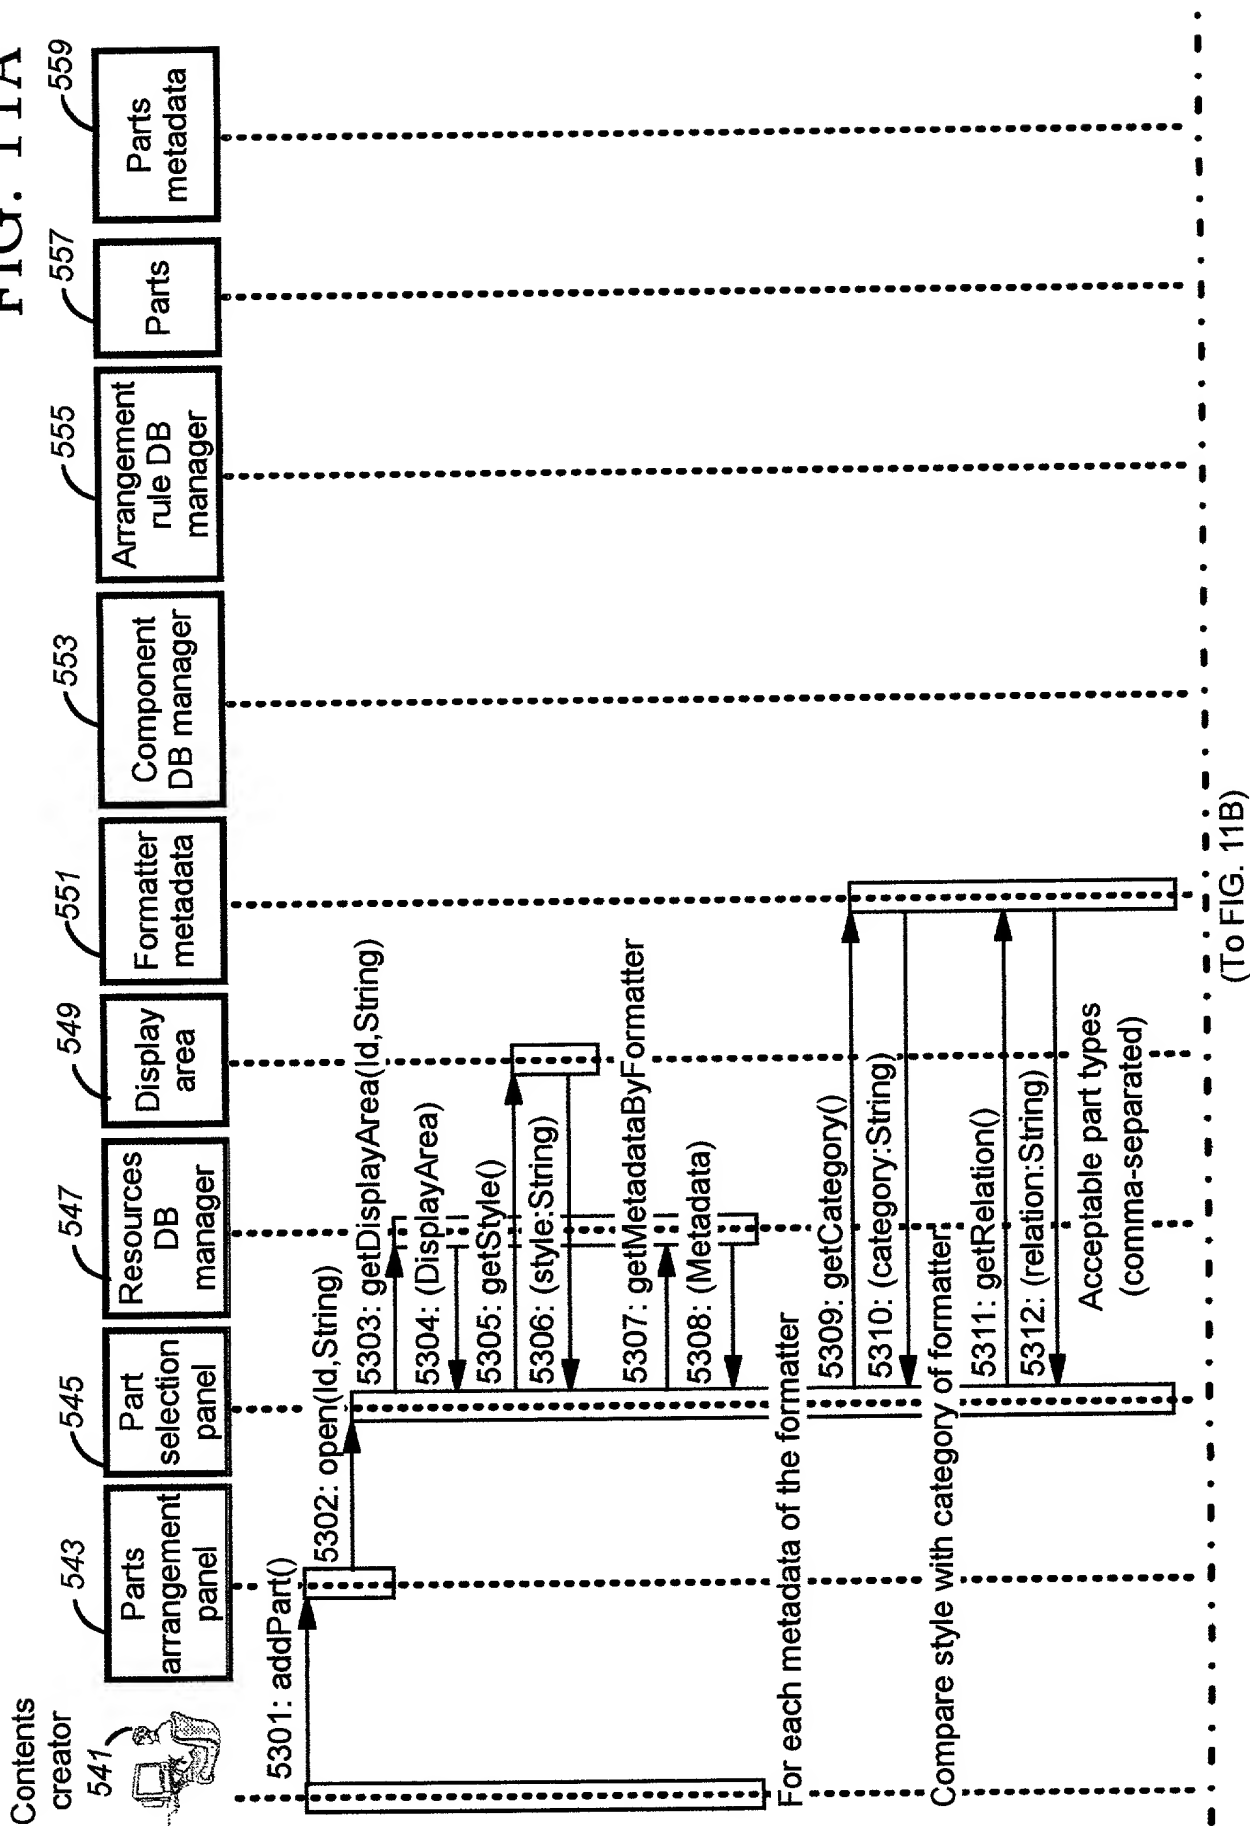


FIG. 11B

(From FIG. 11A)

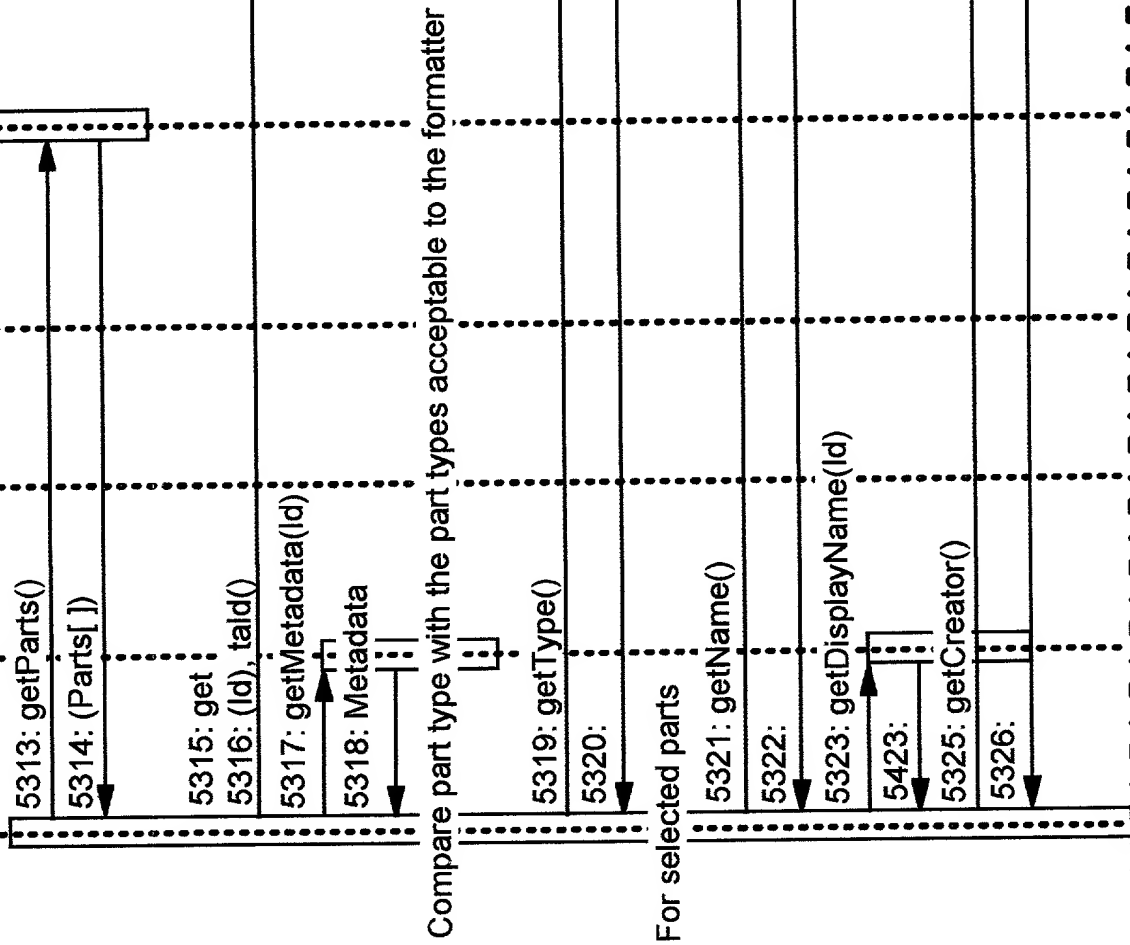

(To FIG. 12)

(From FIG. 11B)

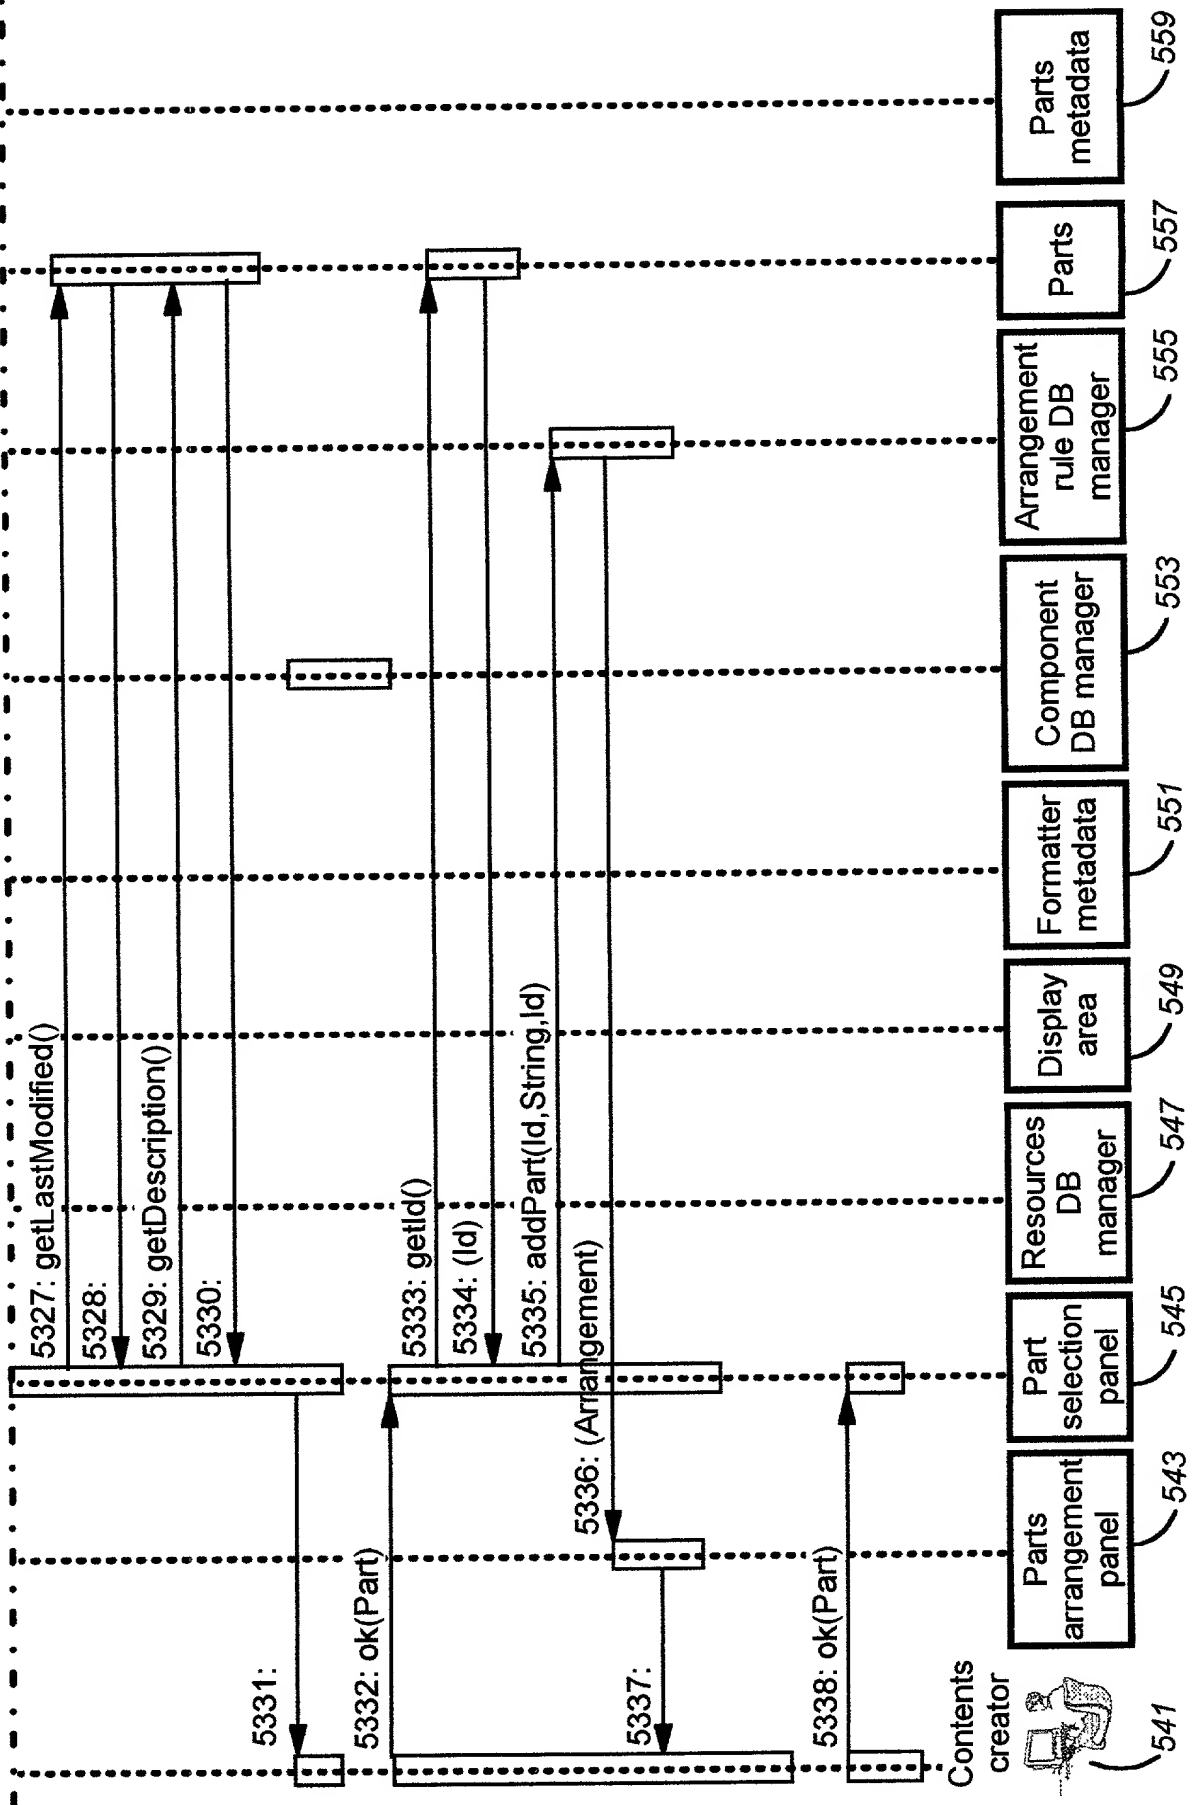


FIG. 13

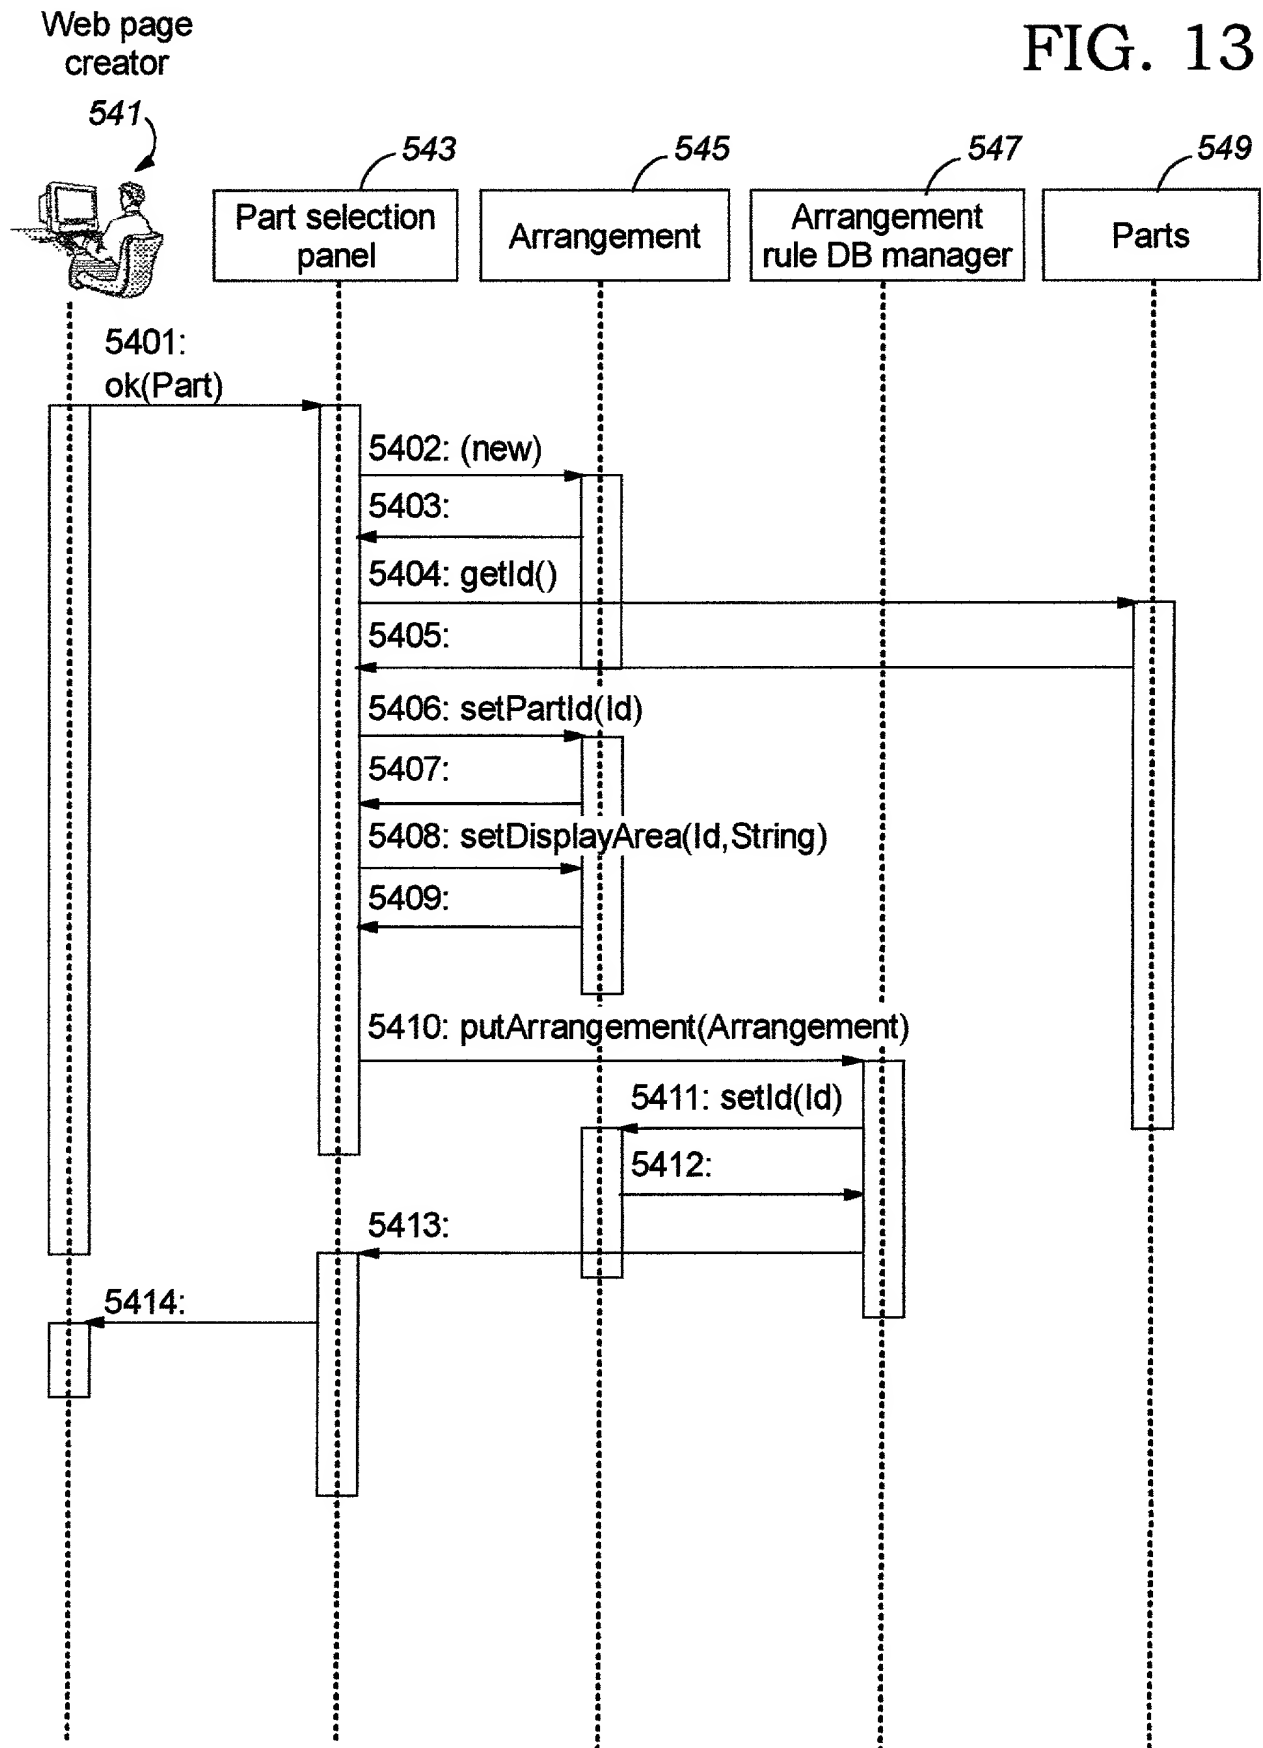


FIG. 14

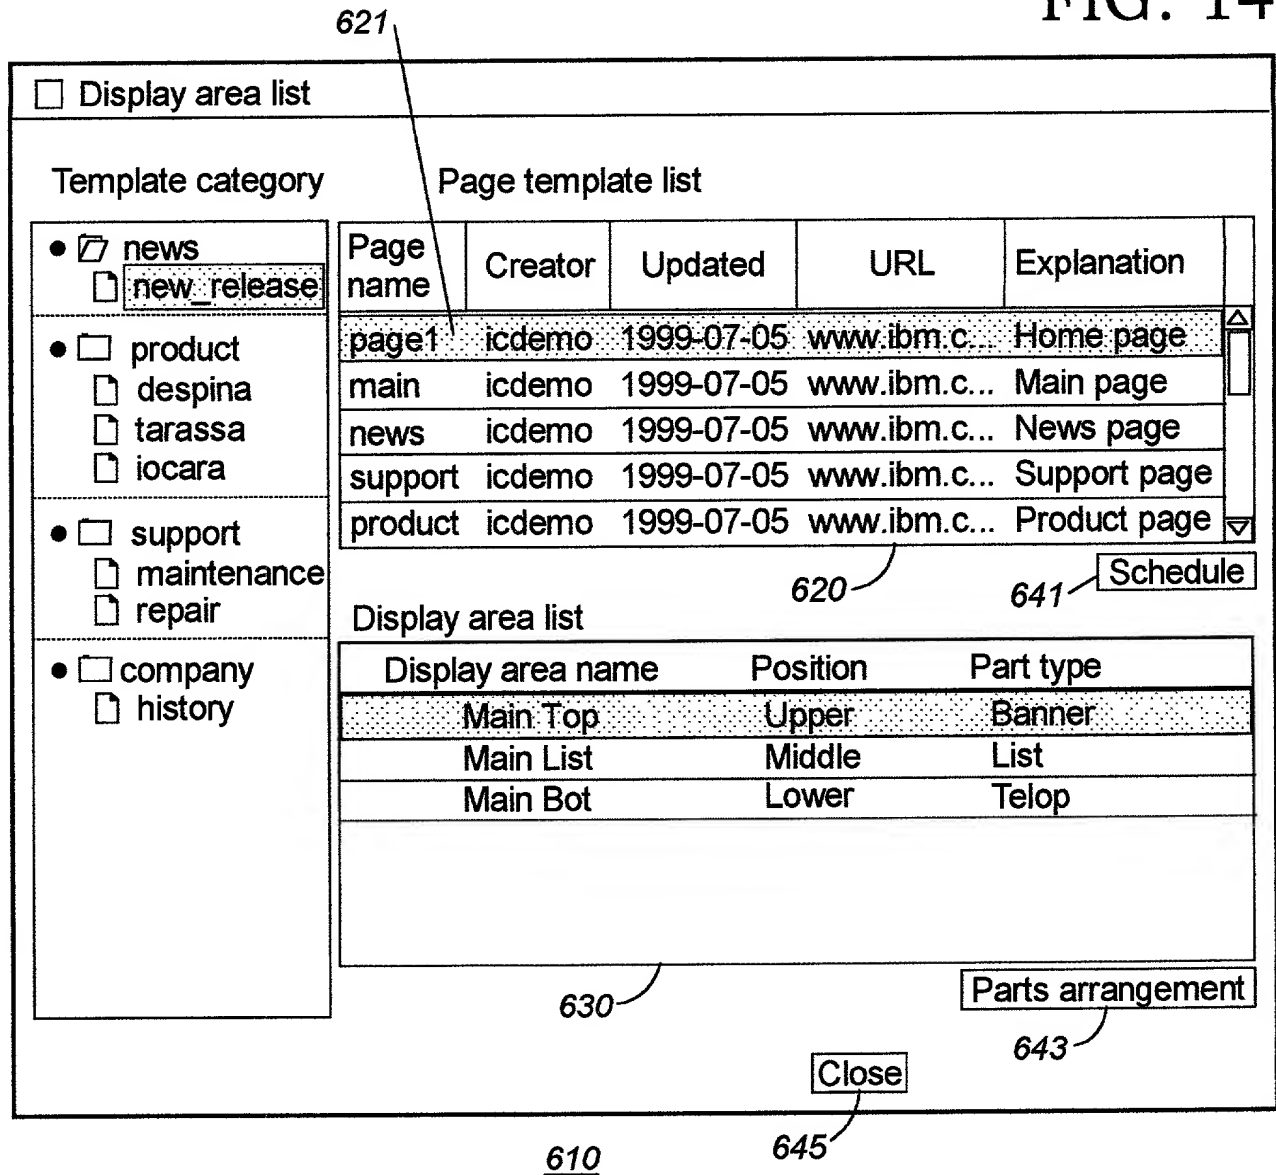


FIG. 16

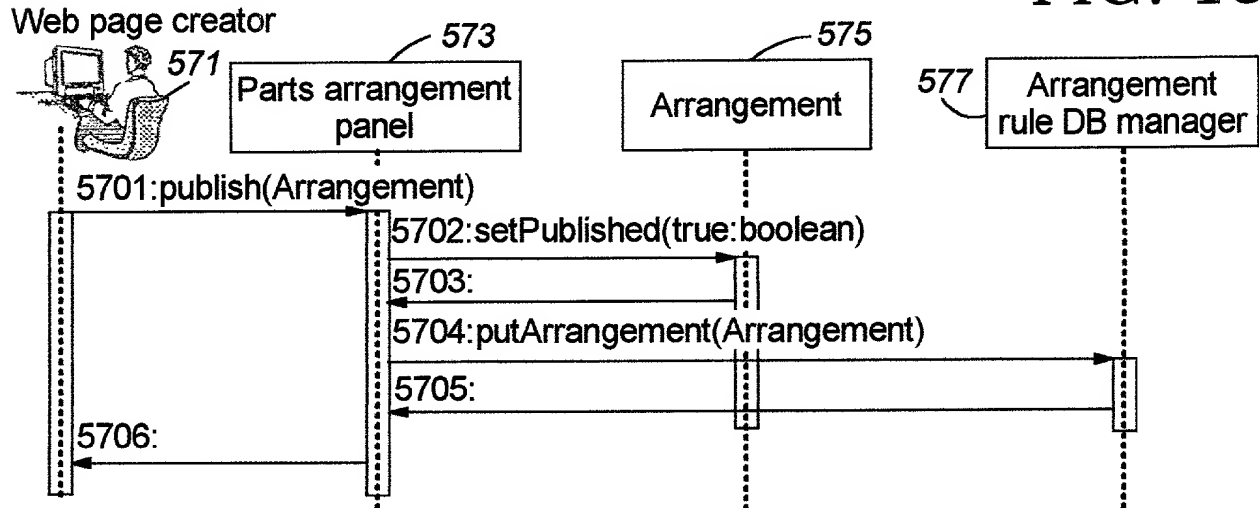


FIG. 15

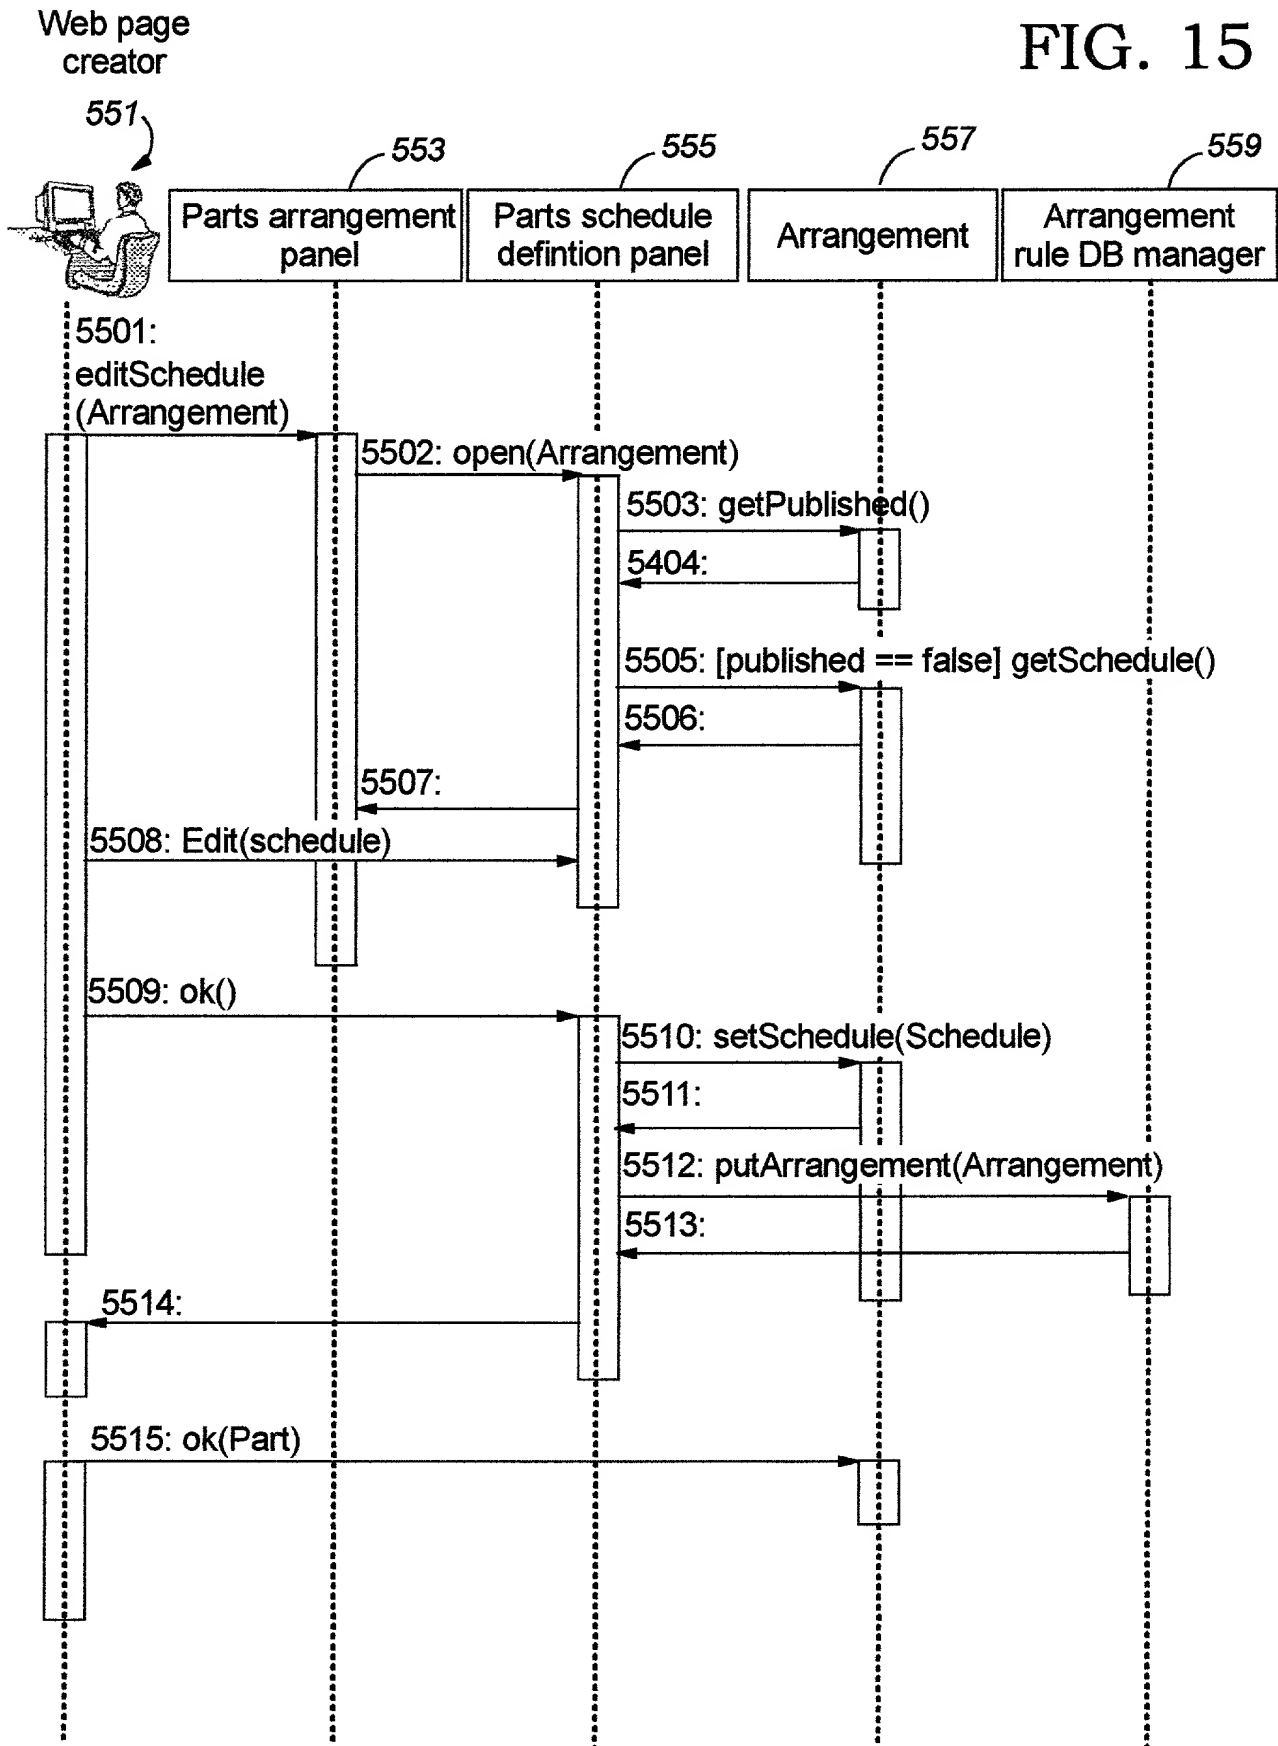


FIG. 17A


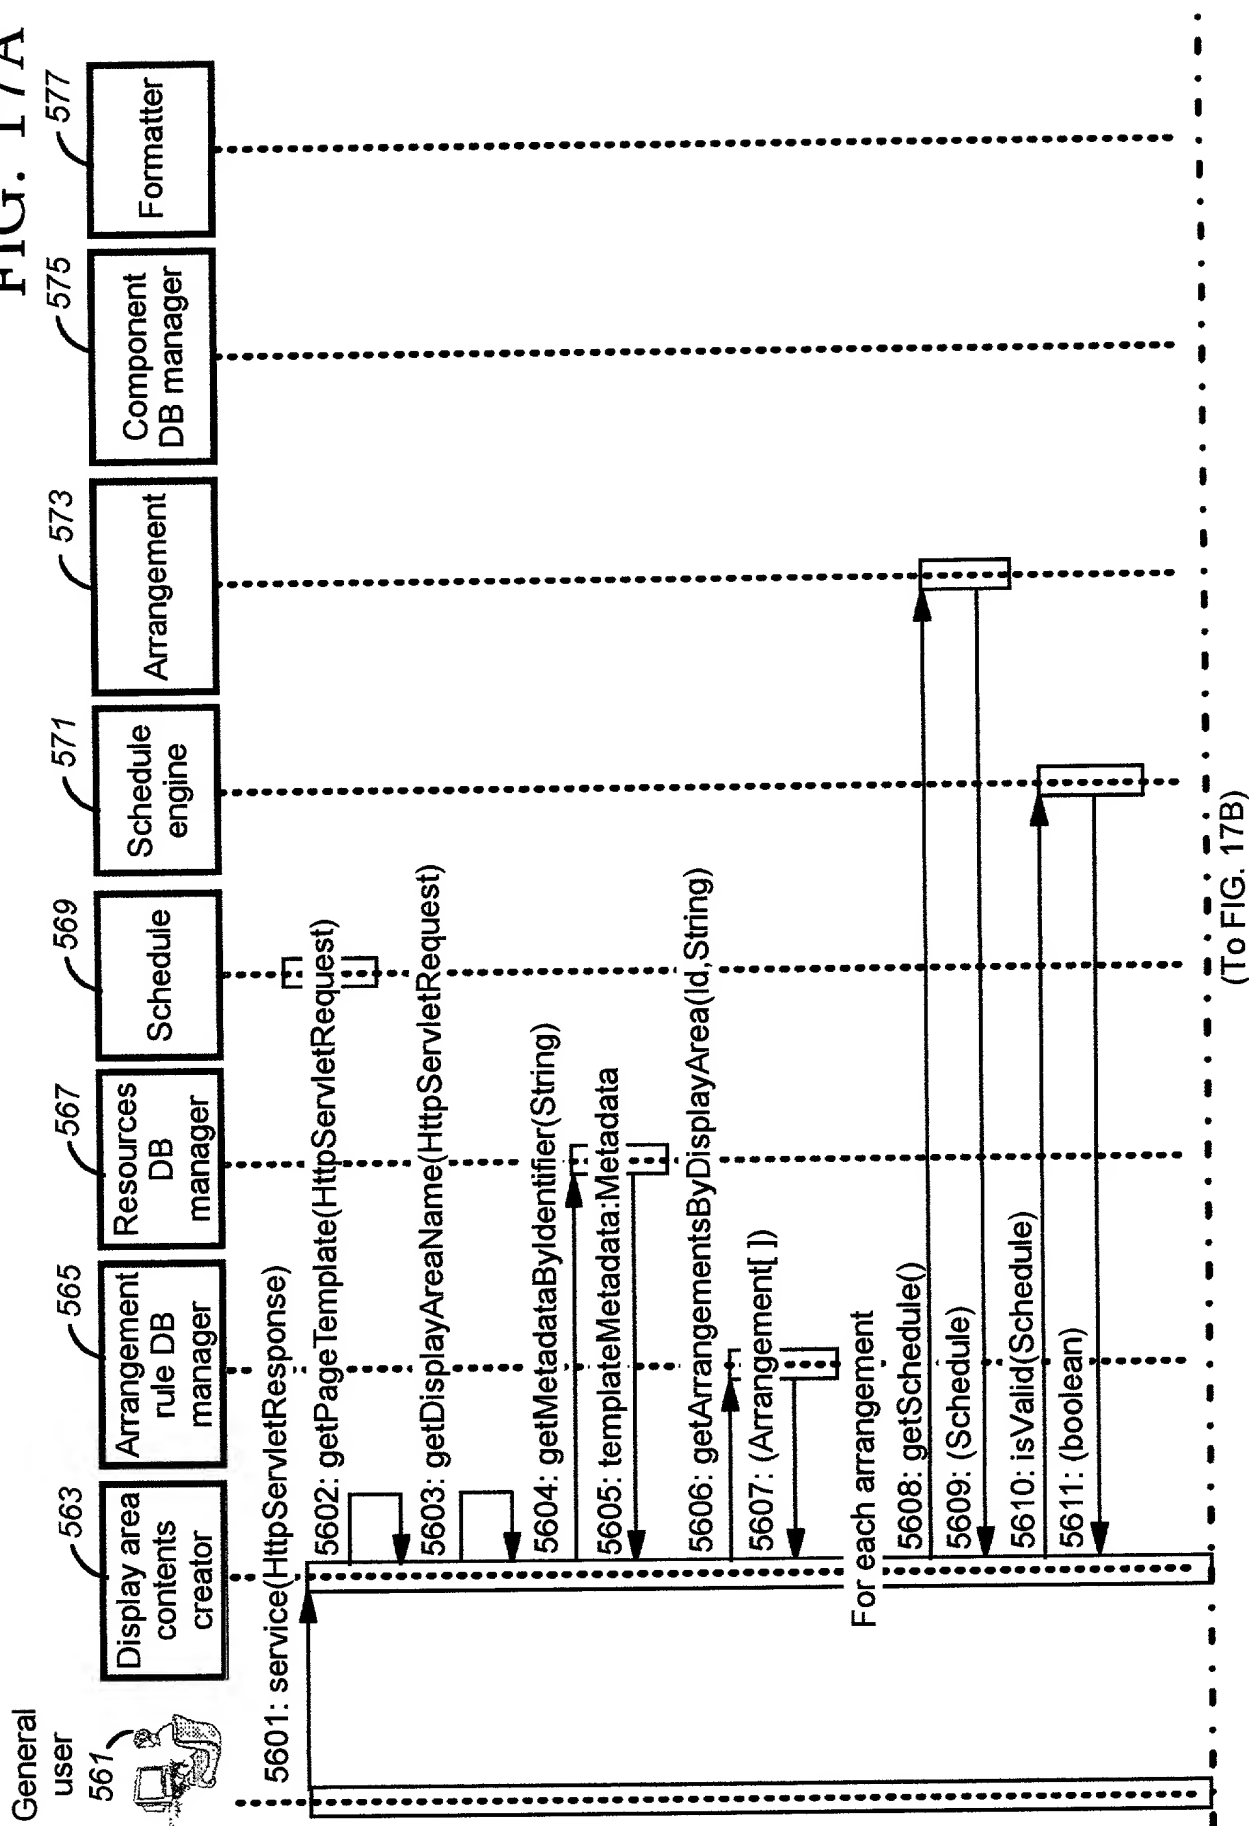


FIG. 17B

(From FIG. 17A)

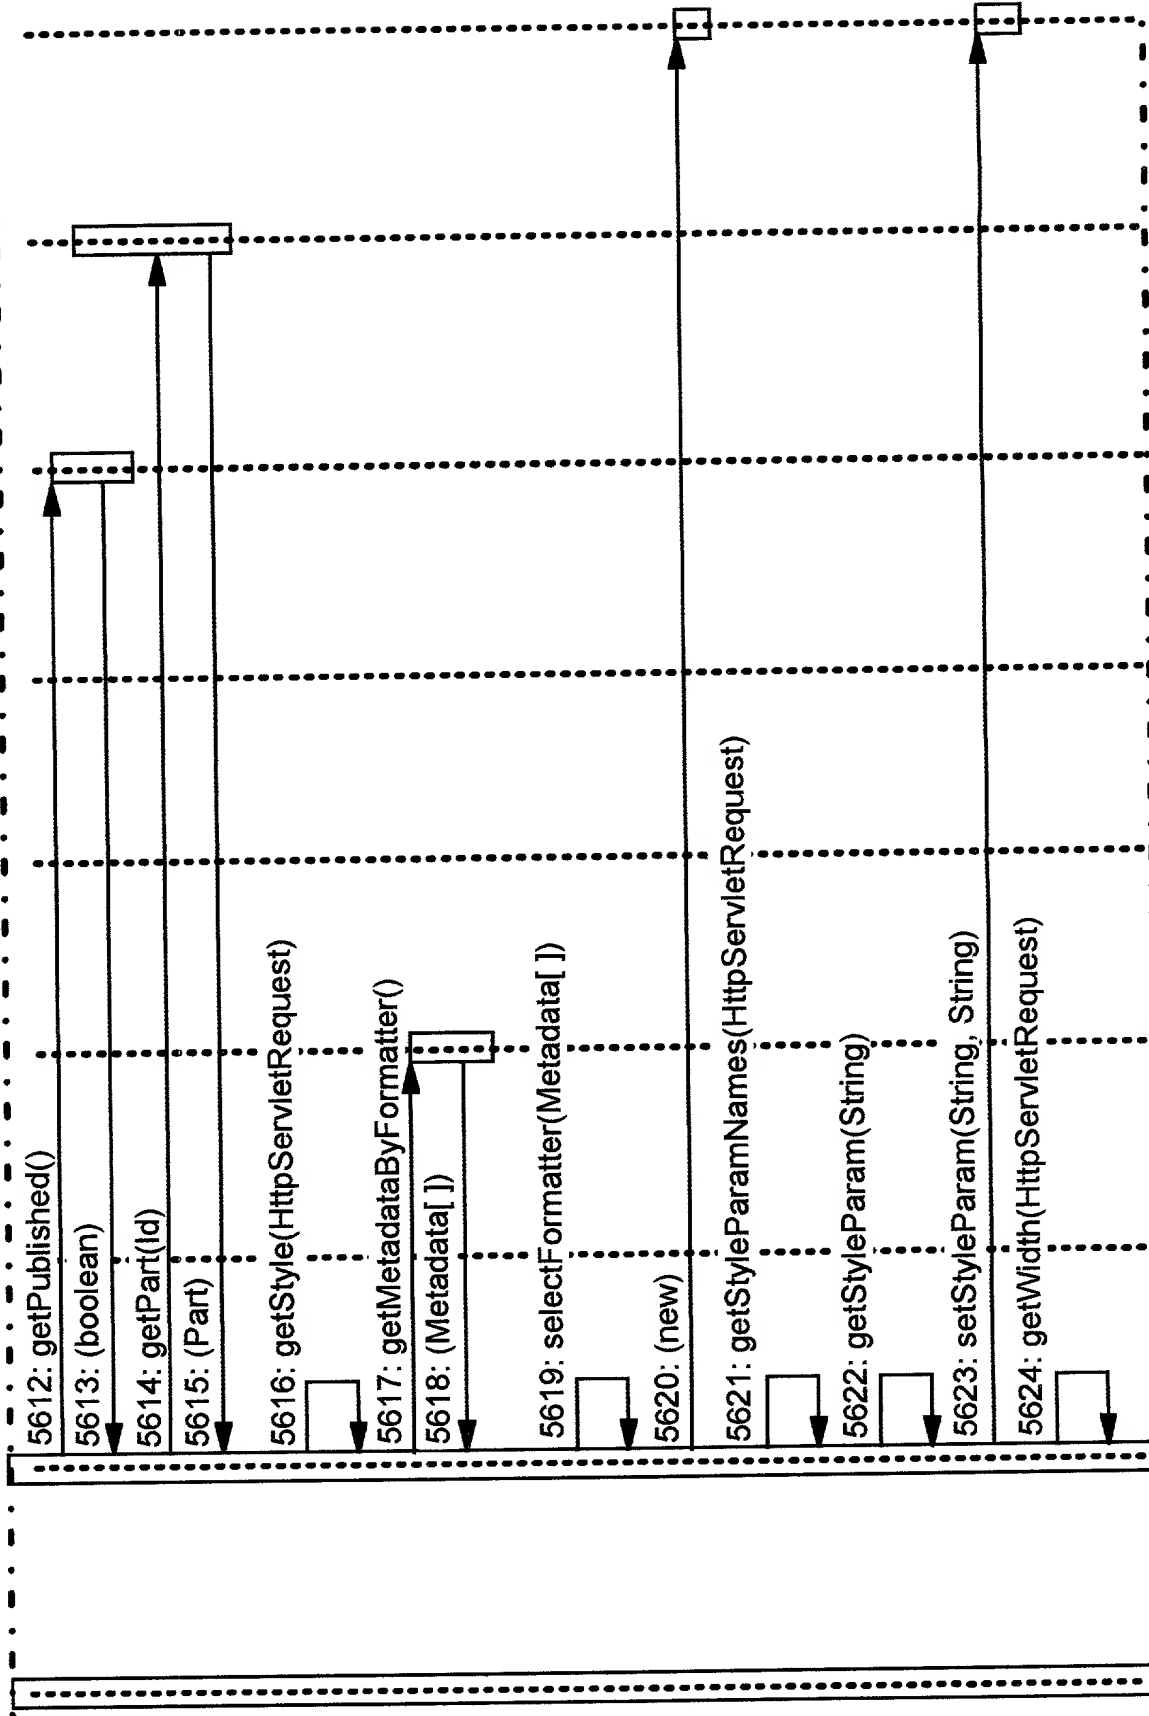

(To FIG. 18)

FIG. 18

(From FIG. 17B)

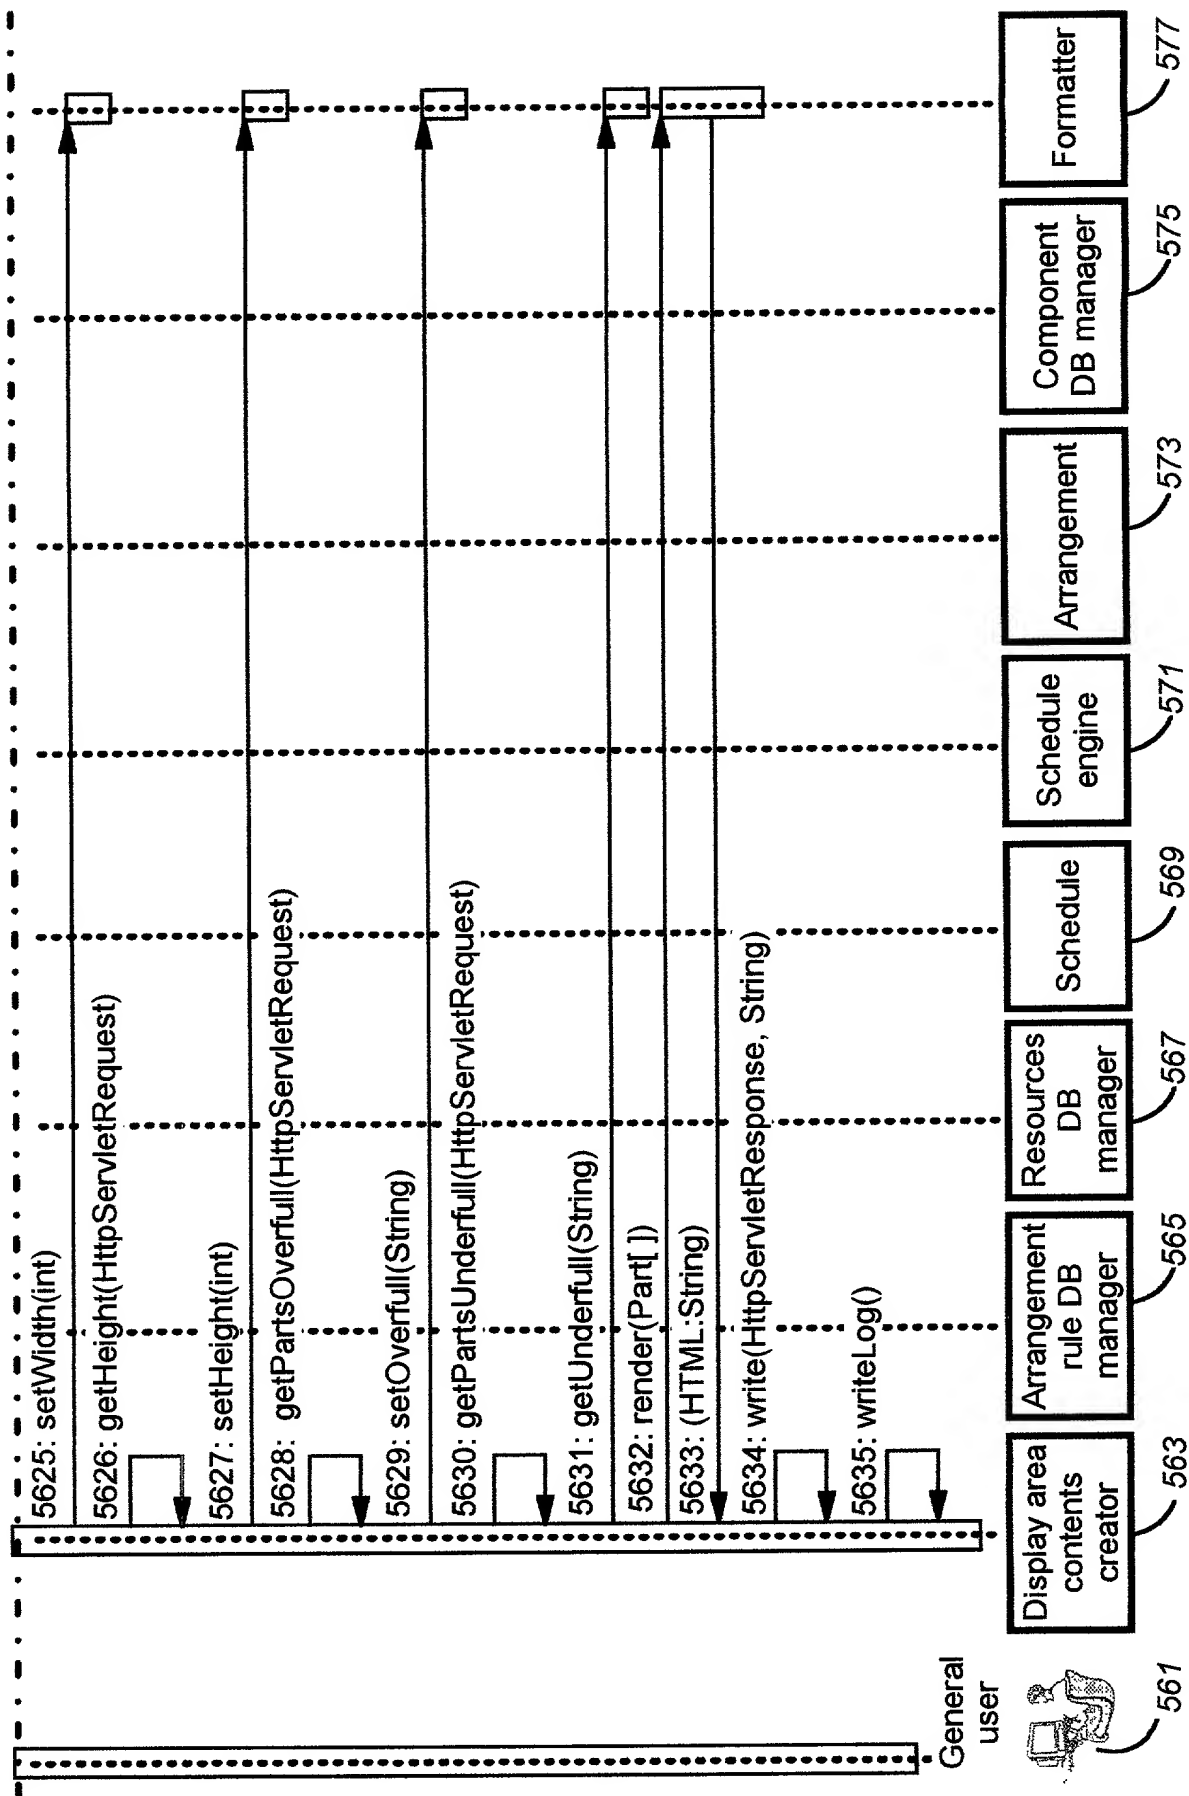


FIG. 19

```

<SERVLET code=icdacr codebase=servlet>
  <PARAM NAME="name" VALUE="product_ad">
  <PARAM NAME="style" VALUE="bannerFlow">
  <PARAM NAME="direction" VALUE="horizontal">
  <PARAM NAME="bgColor" VALUE="Gray"
  <PARAM NAME="width" VALUE="300">
  <PARAM NAME="height" VALUE="80">
  <PARAM NAME="position" VALUE="top">
  <PARAM NAME="default" VALUE="<IMG SRC='default_img.gif'>">
  <PARAM NAME="partsOverfull" VALUE="random">
  <PARAM NAME="partsUnderfull" VALUE="shrink">
</SERVLET>

```

701

703

Example of mounted display area 700

FIG. 20

Part ID	Part display area name	Part template ID	START	END	Publish
0001	product_ad	1001	1999-01-01 0:00	1999-07-01 0:00	1
0002	product_ad	1002	1999-07-01 0:00	2000-01-01 0:00	1
0003	product_inf	1003	1999-08-01 4:00	1999-09-20 23:00	0
.
.
.

Arrangement rule DB 720

FIG. 21

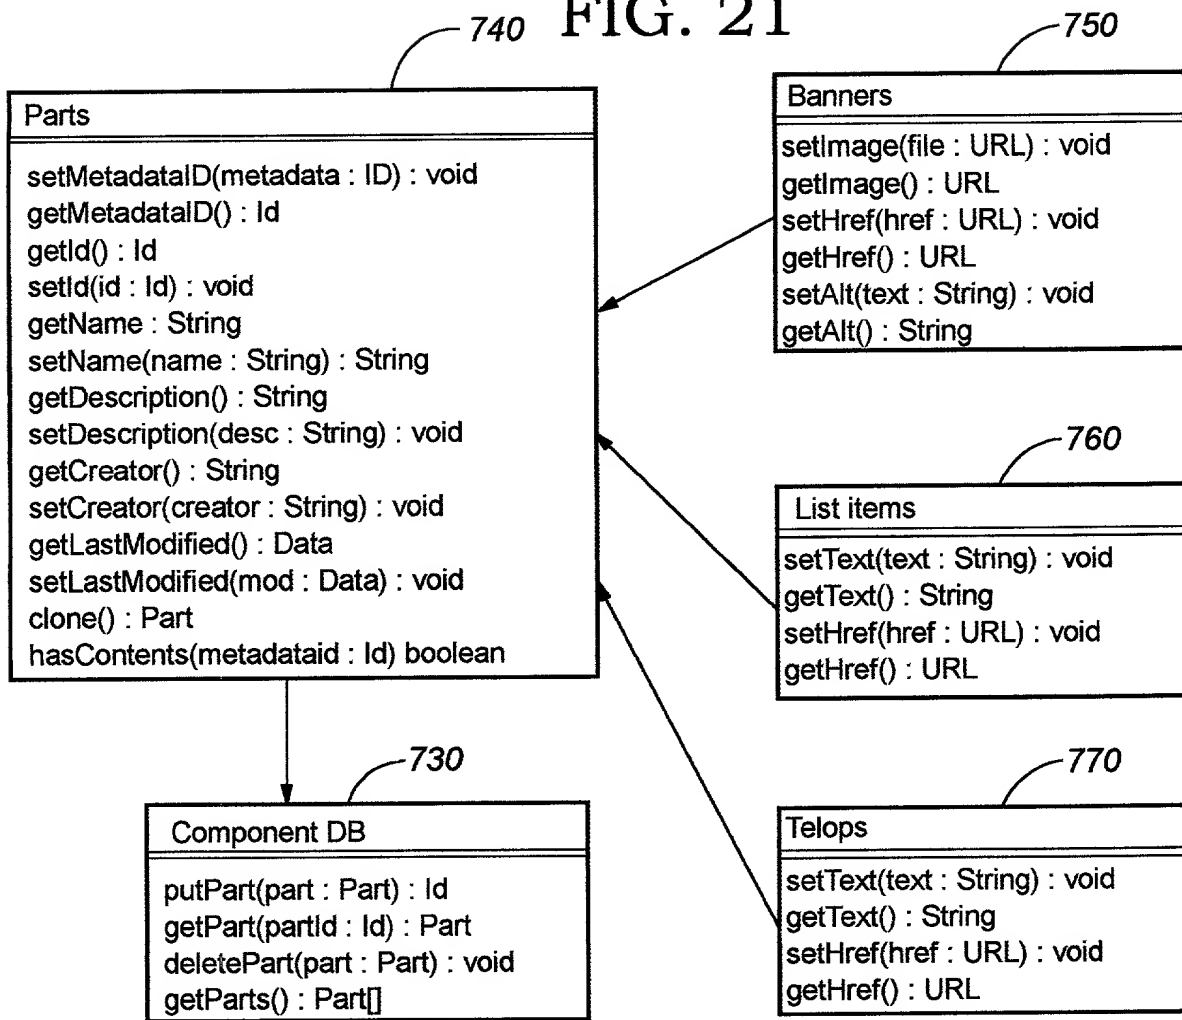


FIG. 23

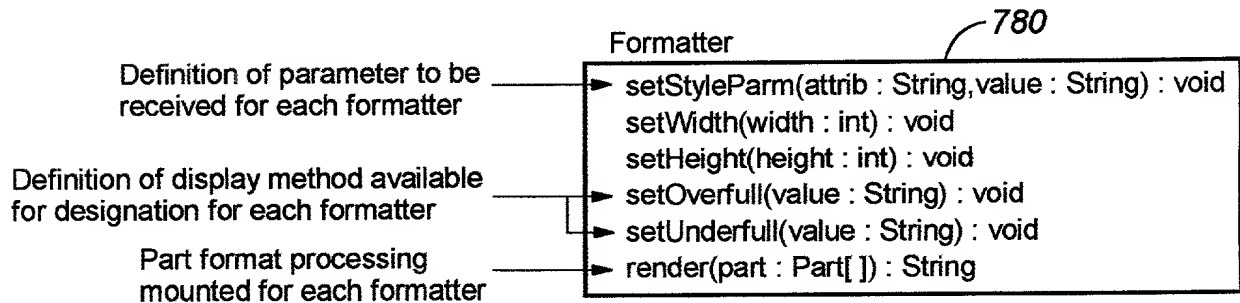


FIG. 22

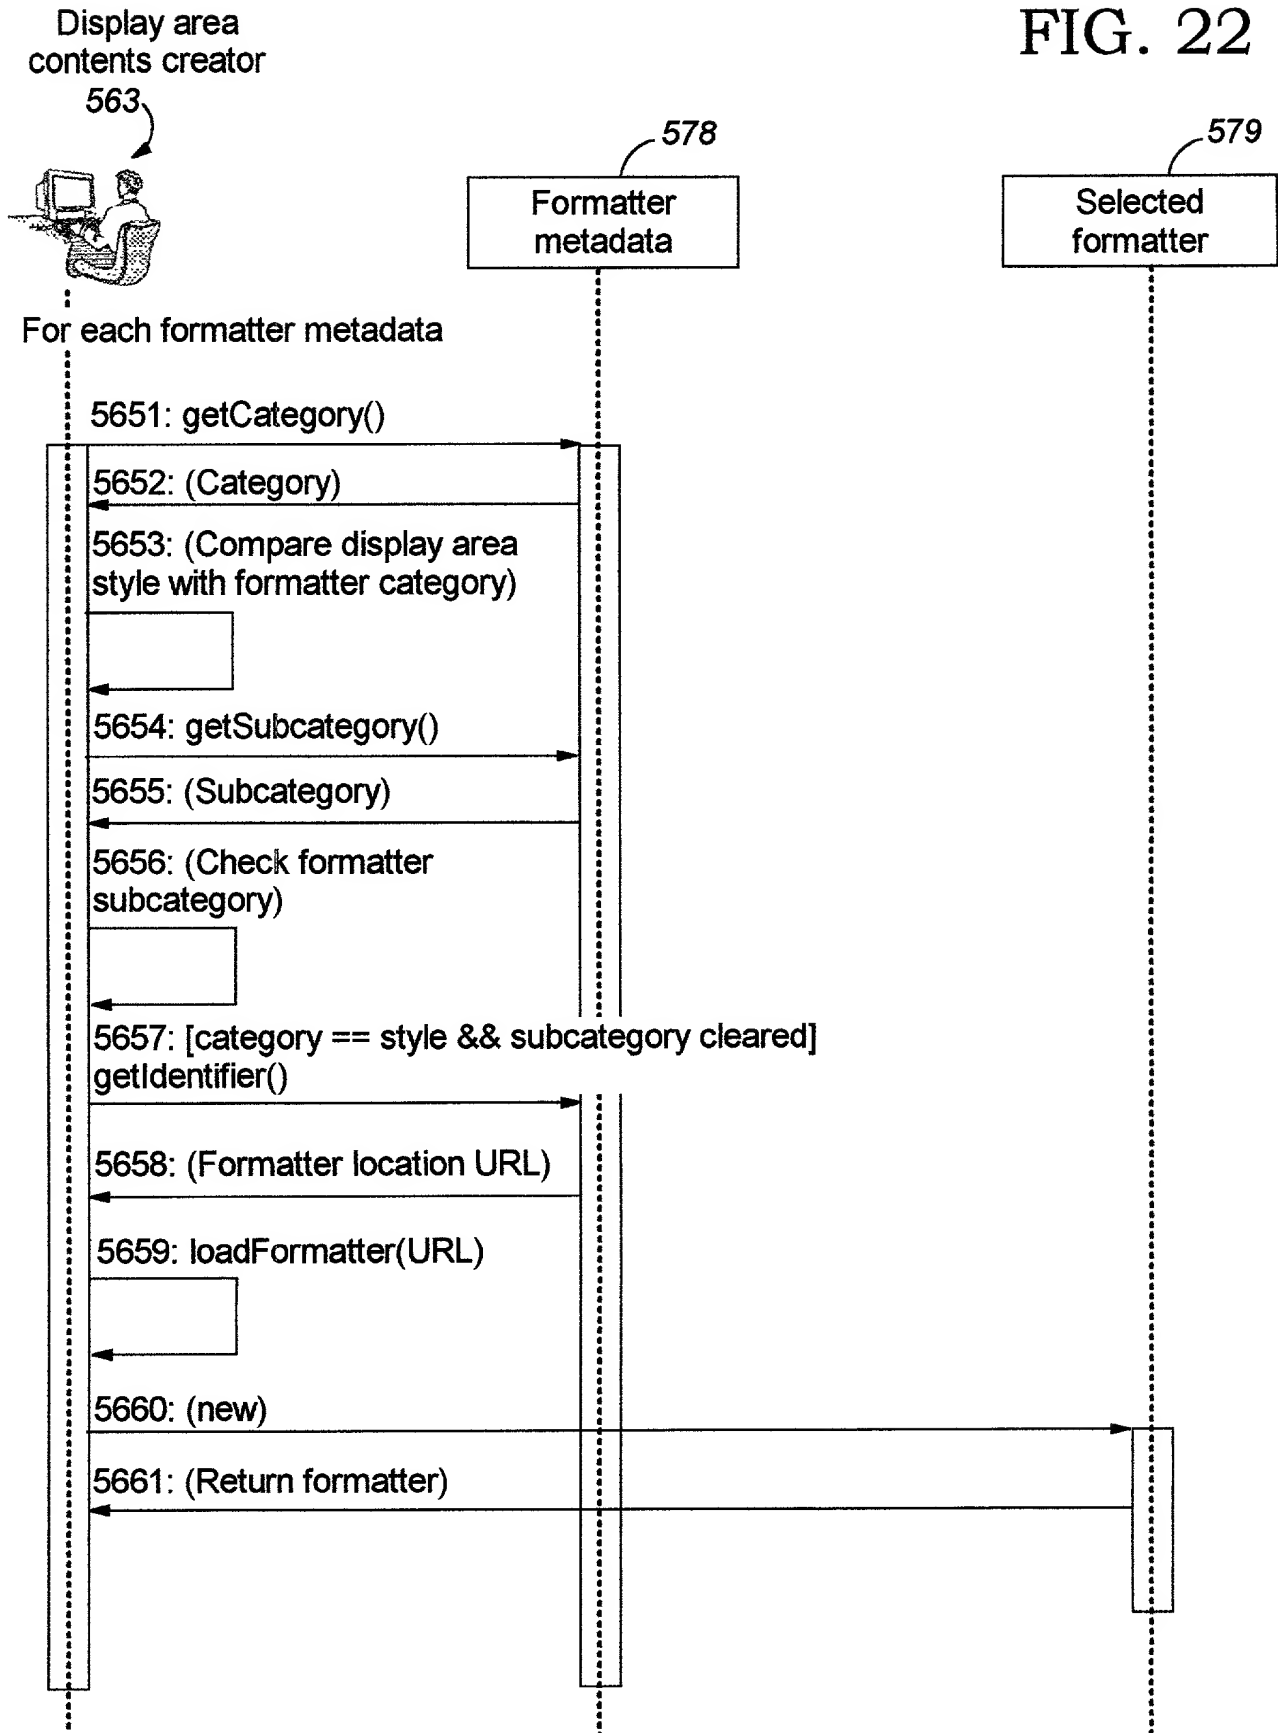


FIG. 24

Difference in format with display are style

```
<SERVLET code=indactr codebase=/servlet>
  <PARAM NAME="name" VALUE="product_ad">
  <PARAM NAME="style" VALUE="banner">
  <PARAM NAME="width" VALUE="100">
  <PARAM NAME="height" VALUE="40">
  <PARAM NAME="position" VALUE="top">
  <PARAM NAME="default" VALUE="<IMG SRC='default_img.gif'>">
  <PARAM NAME="partsOverfull" VALUE="rotation=2">
  <PARAM NAME="partUnderfull" VALUE="shrink">
</SERVLET>
```

FIG. 25

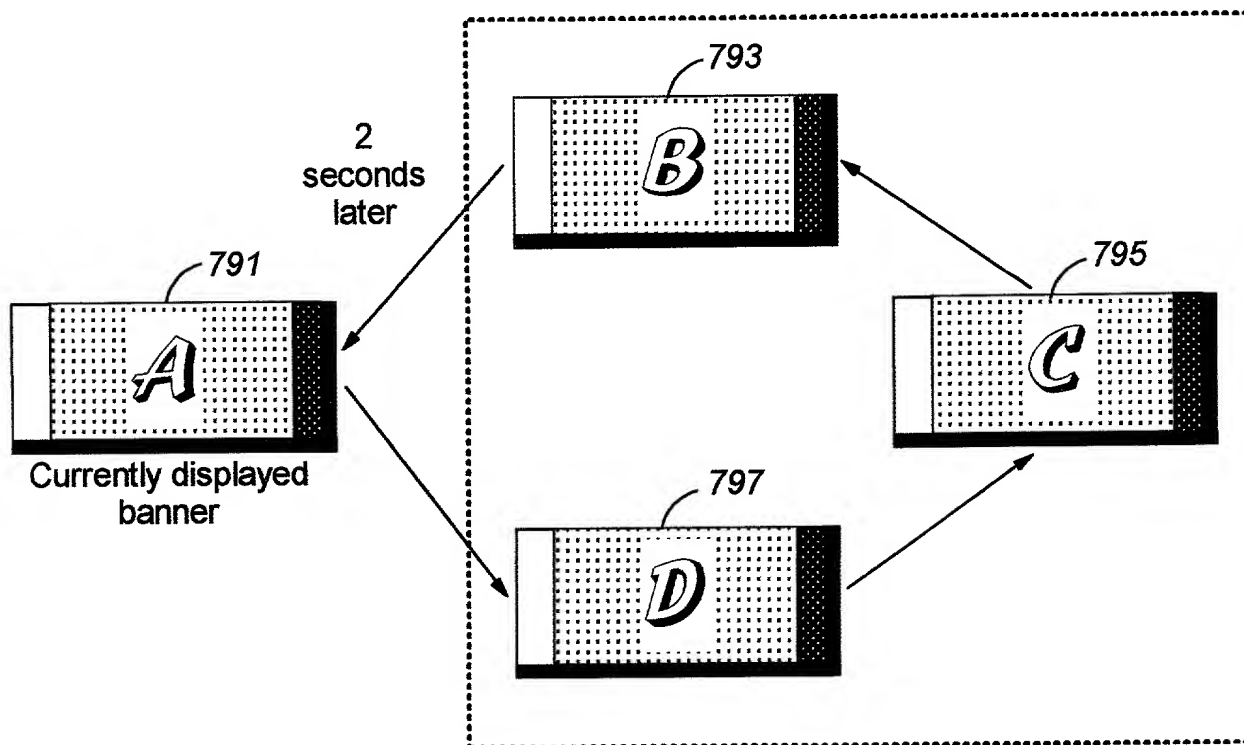


FIG. 26

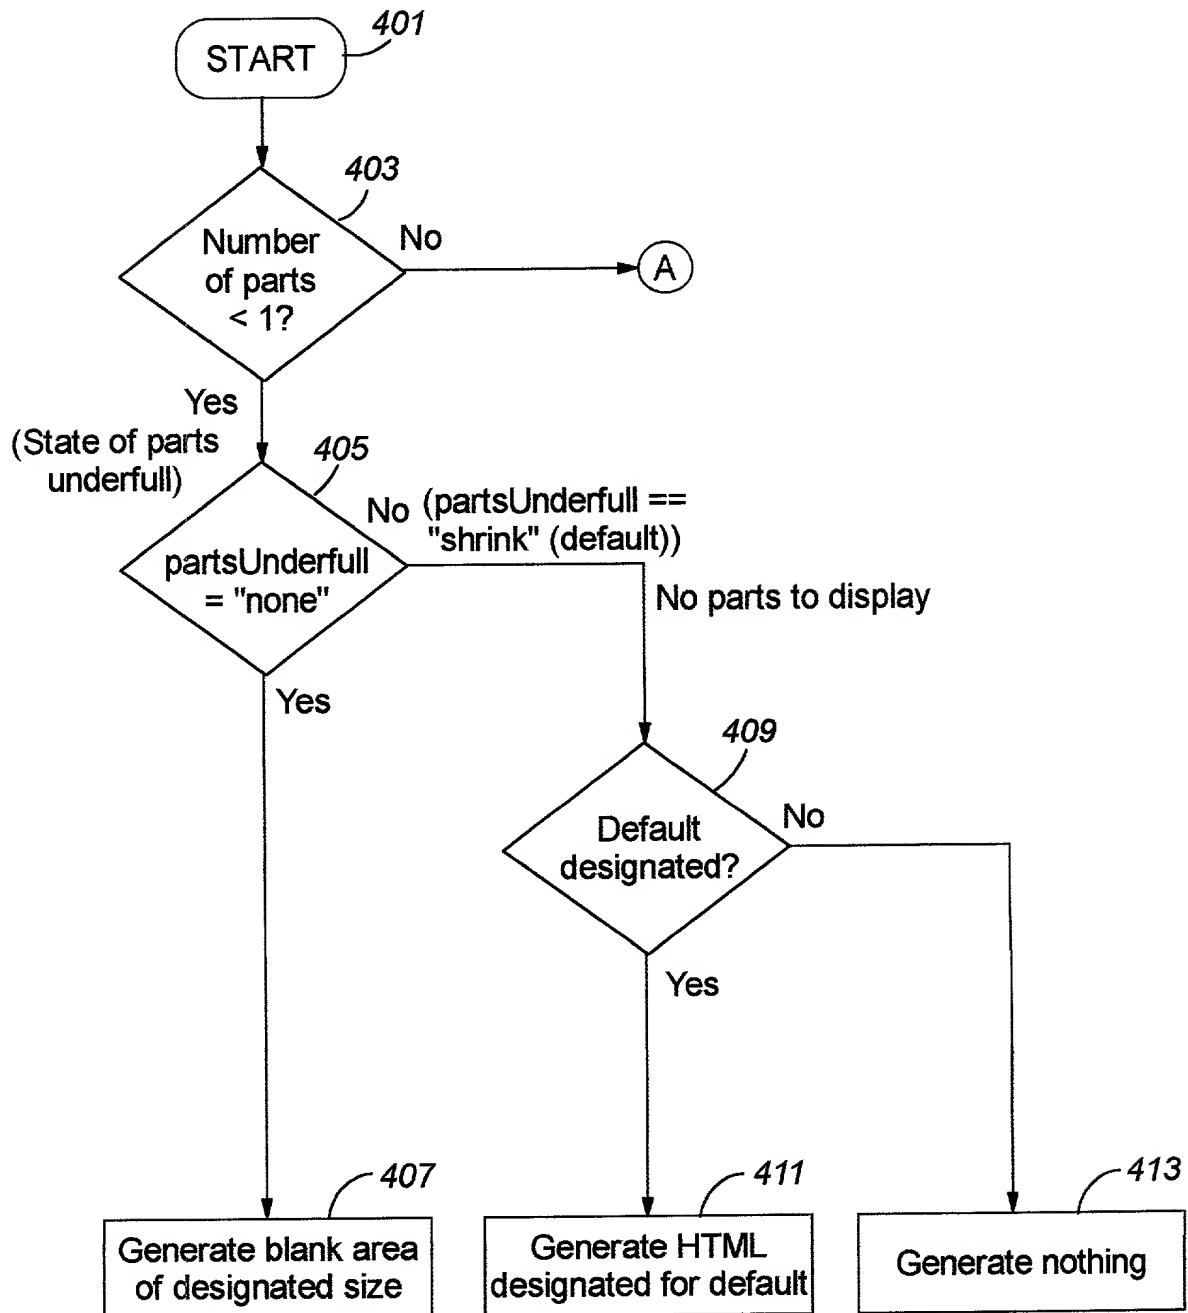


FIG. 27

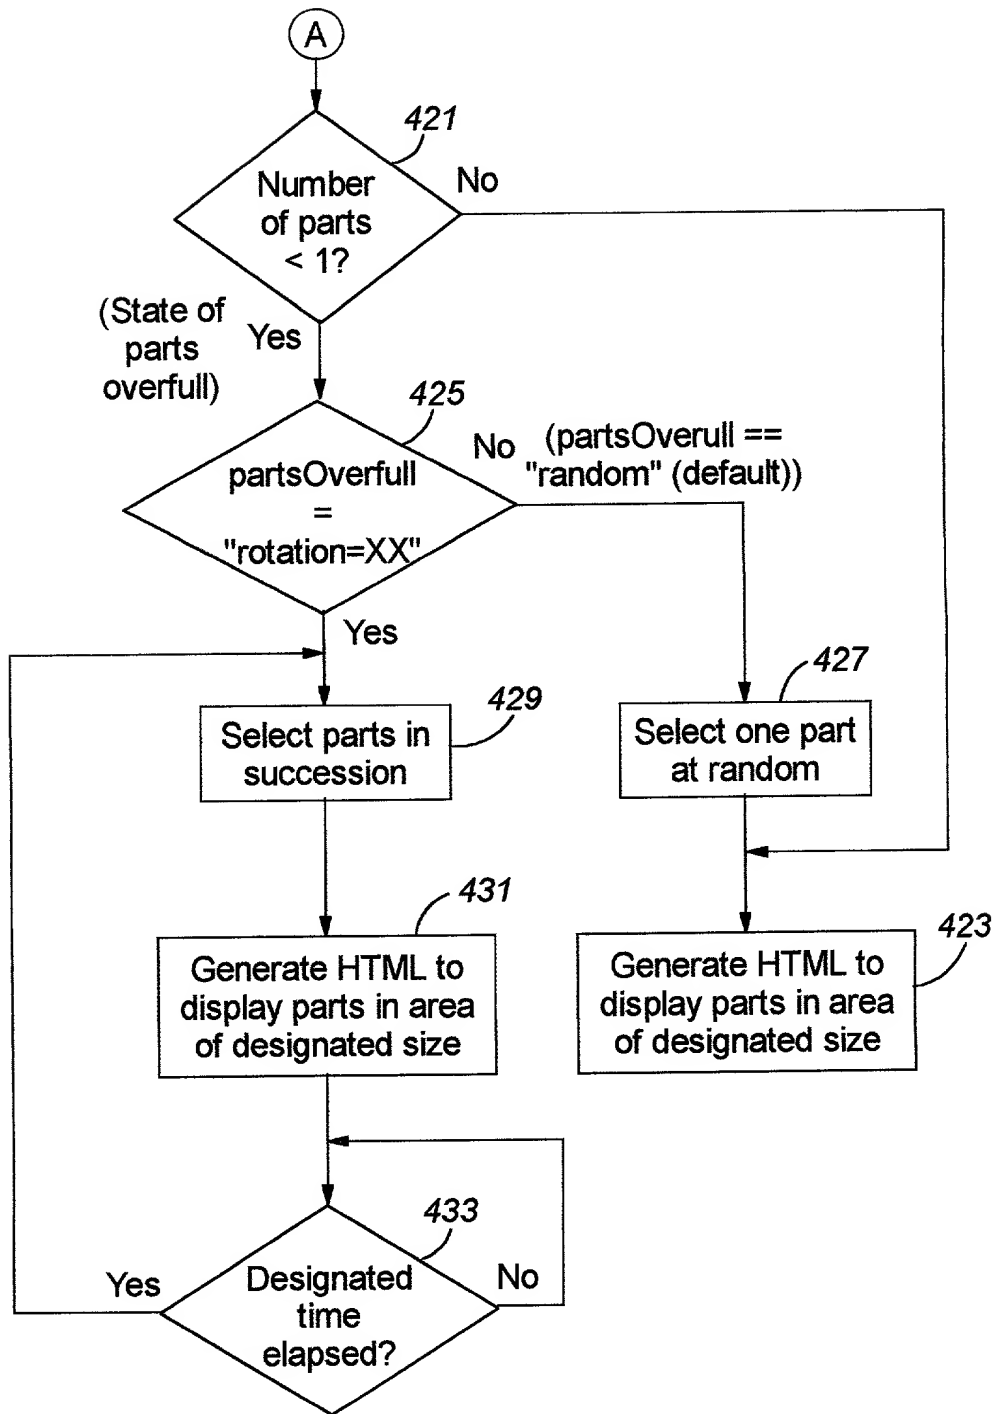


FIG. 28

```
<SERVLET code=indactr codebase=/servlet>  
  <PARAM NAME="name" VALUE="product_ad">  
  <PARAM NAME="style" VALUE="bannerFlow">  
  <PARAM NAME="direction" VALUE="horizontal">  
  <PARAM NAME="bgColor" VALUE="gray">  
  <PARAM NAME="width" VALUE="300">  
  <PARAM NAME="height" VALUE="80">  
  <PARAM NAME="position" VALUE="top">  
  <PARAM NAME="default" VALUE="<IMG SRC='default_img.gif'>">  
  <PARAM NAME="partsOverfull" VALUE="random">  
  <PARAM NAME="partUnderfull" VALUE="shrink">  
</SERVLET>
```

FIG. 29

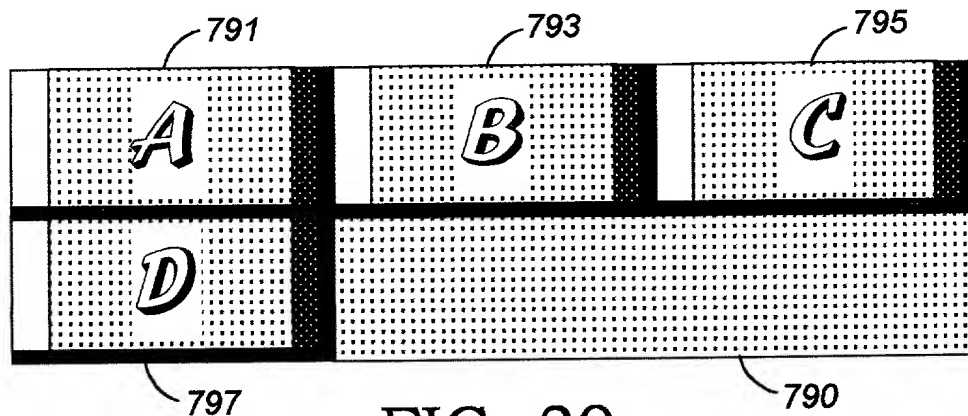


FIG. 30

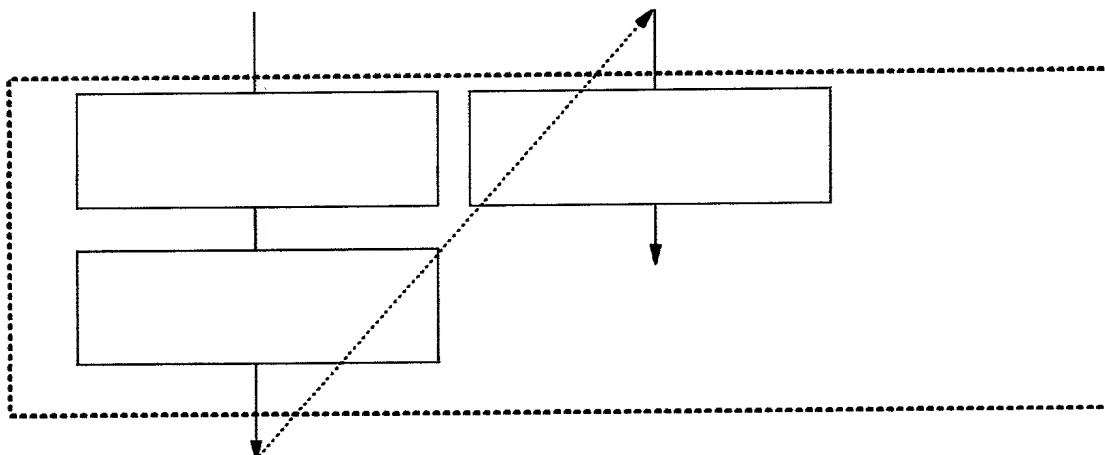


FIG. 31

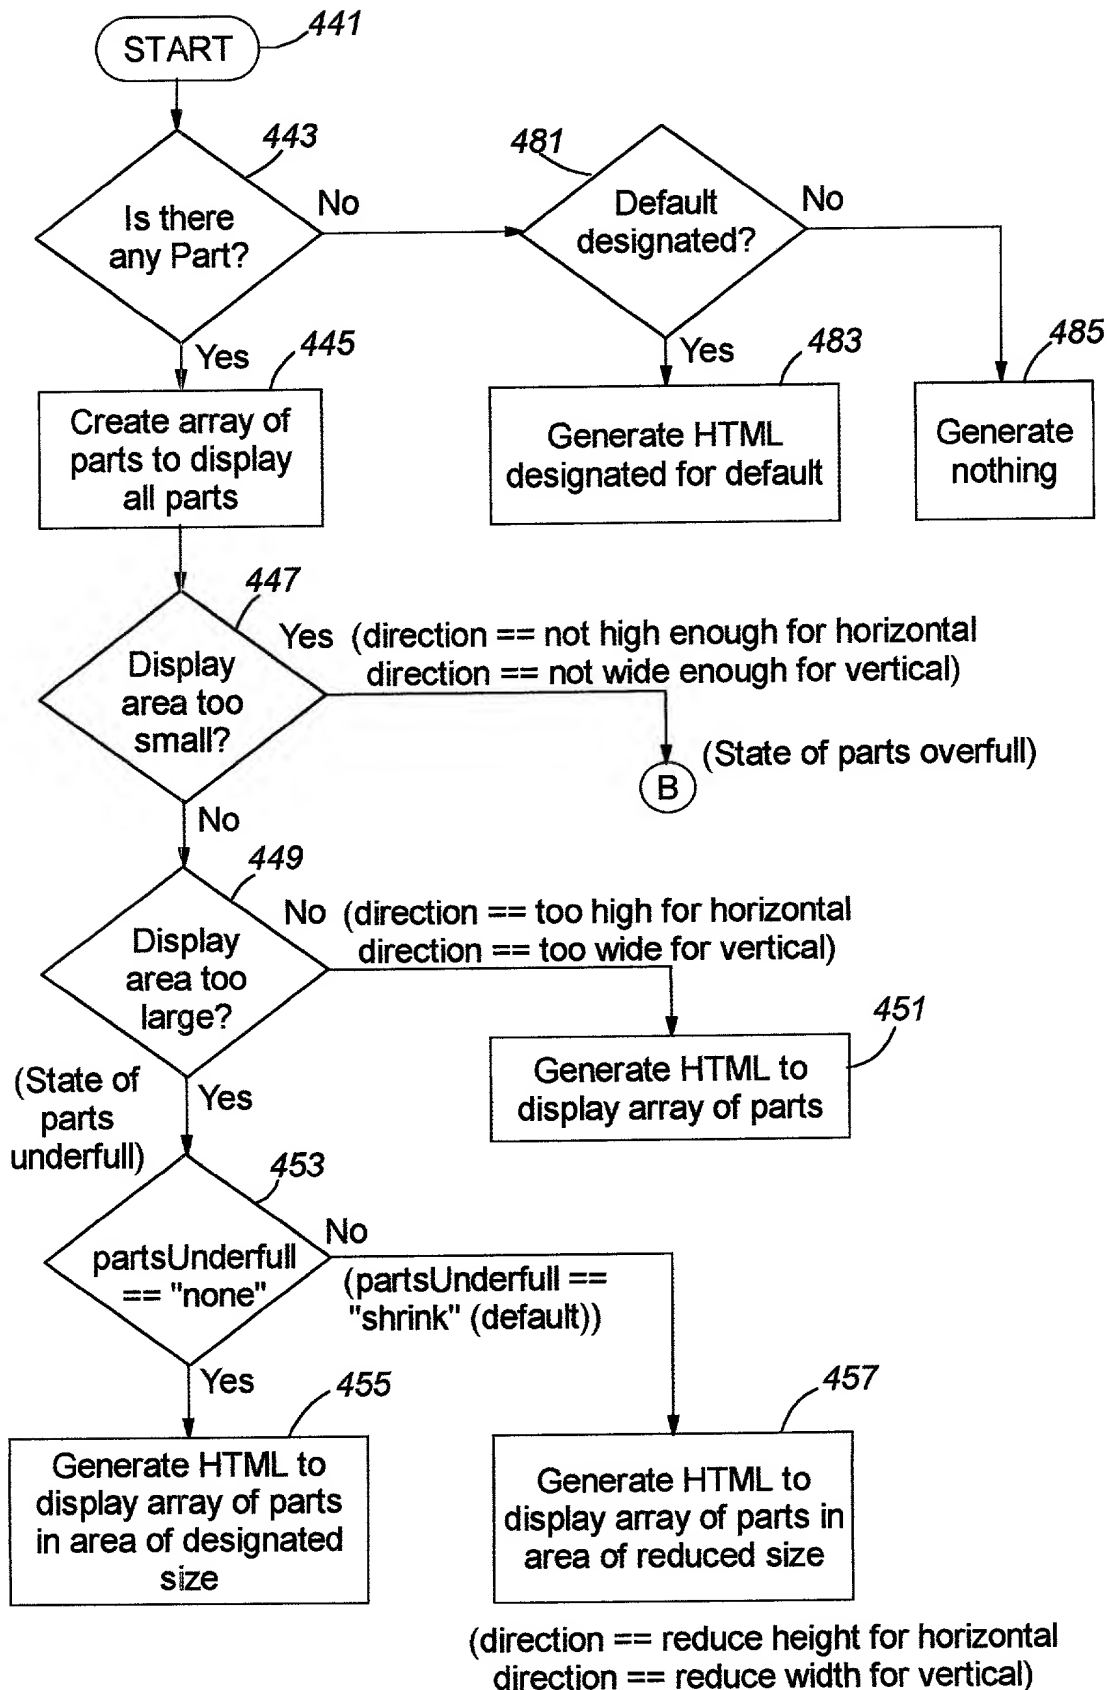


FIG. 32


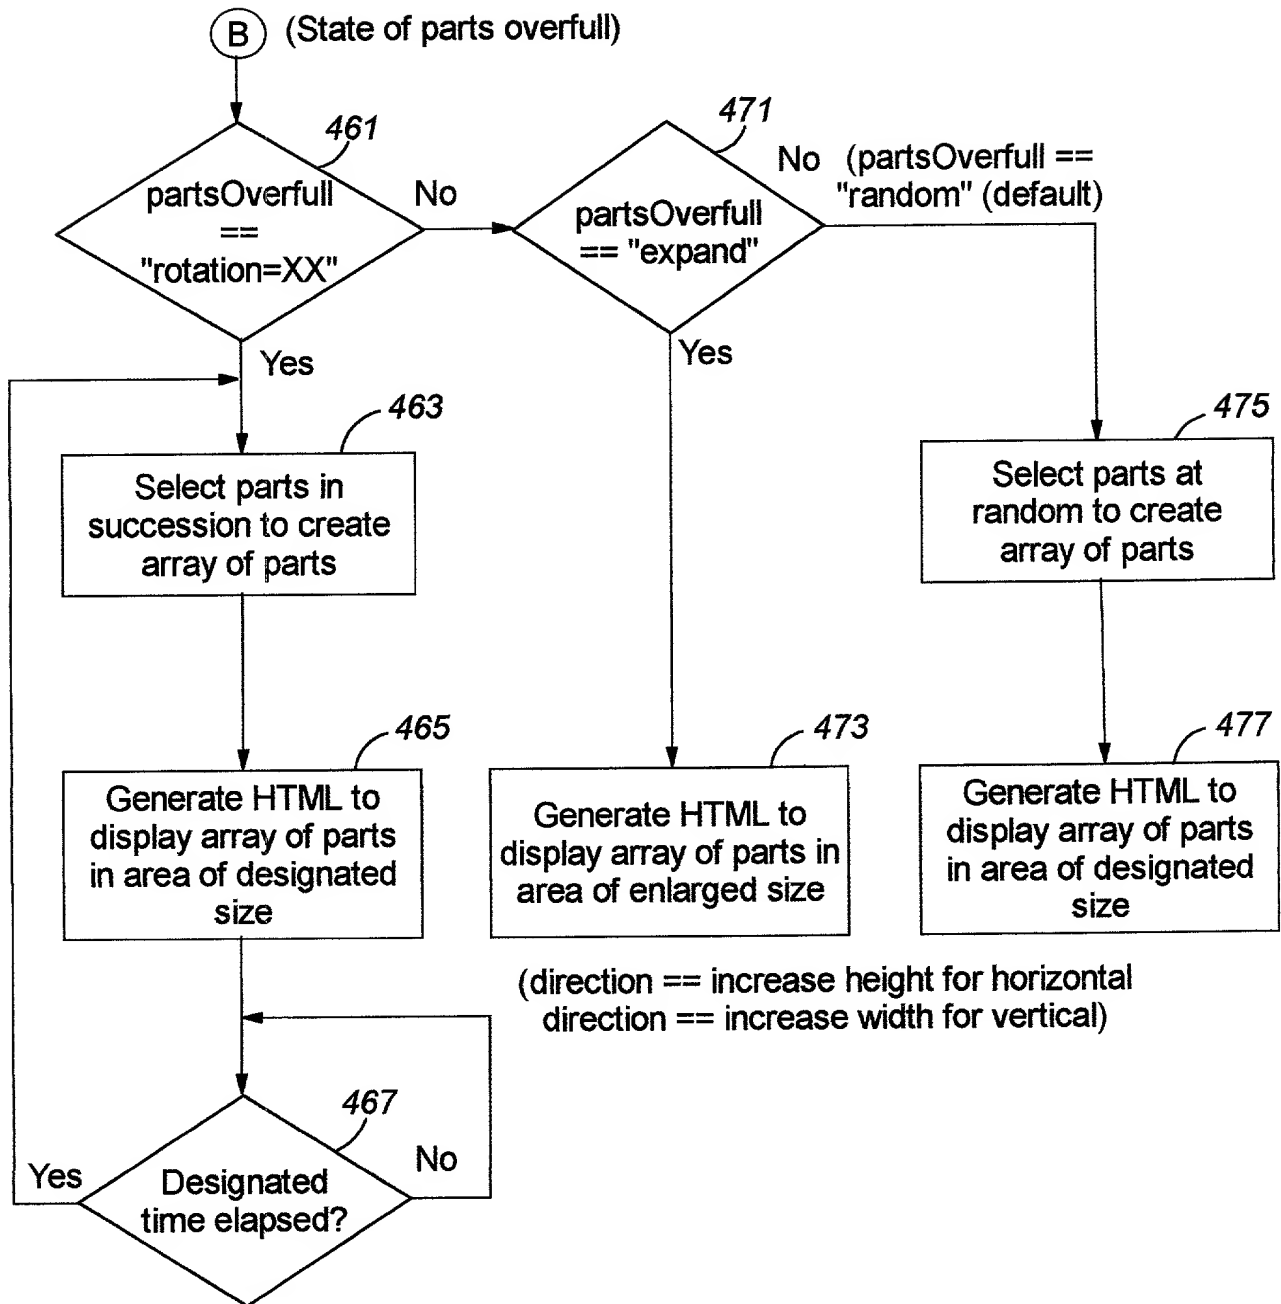


FIG. 33

Create array of parts to display all parts

parts[0...4]


direction == horizontal

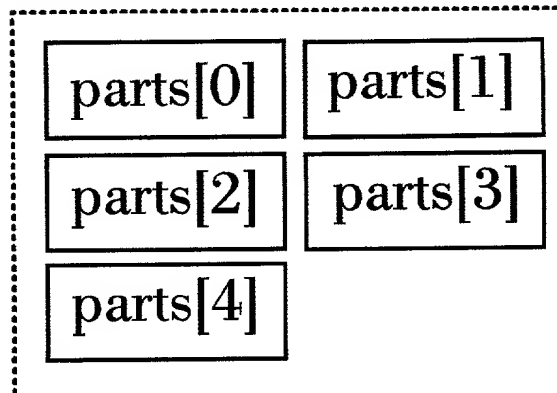

Parts arrangement

(0,0) = parts[0]; (0,1) = parts[1];
(1,0) = parts[2]; (1,1) = parts[3];
(2,0) = parts[4];

direction == vertical

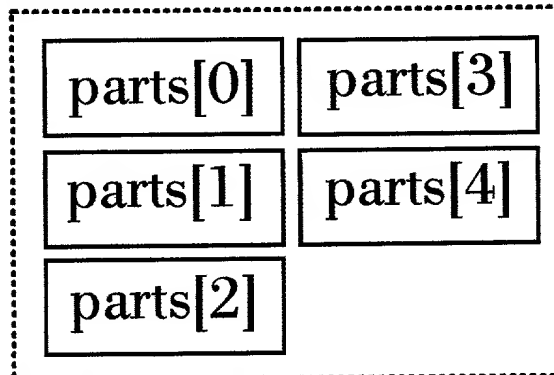

Parts arrangement

(0,0) = parts[0]; (0,1) = parts[3];
(1,0) = parts[1]; (1,1) = parts[4];
(2,0) = parts[2];

Select parts in succession and create array of parts
parts[0...4]

parts[0]	parts[1]
parts[2]	parts[3]

Diagram illustrating the memory layout of an array `parts` with 5 elements. The elements are shown in a 2x2 grid:

- Top-left: `parts[4]`
- Top-right: `parts[0]`
- Bottom-left: `parts[1]`
- Bottom-right: `parts[2]`

The diagram shows the elements are stored in memory, with a dashed line indicating the boundary of the array structure.

```
(1,0) = parts[1]; (1,1) = parts[2];
```

Select parts at random and create array of parts
parts[0...4]

parts[4]	parts[2]
parts[0]	parts[3]

```
(1,0) = parts[0]; (1,1) = parts[3];
```

	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	2101	2102	2103	2104	2105	2106	2107	2108	2109	2110	2111	2112	2113	2114	2115	2116	2117	2118	2119	2120	2121	2122	2123	2124	2125	2126	2127	2128	2129	2130	2131	2132	2133	2134	2135	2136	2137	2138	2139	2140	2141	2142	2143	2144	2145	2146	2147	2148	2149	2150	2151	2152	2153	2154	2155	2156	2157	2158	2159	2160	2161	2162	2163	2164	2165	2166	2167	2168	2169	2170	2171	2172	2173	2174	2175	2176	2177	2178	2179	2180	2181	2182	2183	2184	2185	2186	2187	2188	2189	2190	2191	2192	2193	2194	2195	2196	2197	2198	2199	2200	2201	2202	2203	2204	2205	2206	2207	2208	2209	2210	2211	2212	2213	2214	2215	2216	2217	2218	2219	2220	2221	2222	2223	2224	2225	2226	2227	2228	2229	2230	2231	2232	2233	2234	2235	2236	2237	2238	2239	2240	2241	2242	2243	2244	2245	2246	2247	2248	2249	2250	2251	2252	2253	2254	2255	2256	2257	2258	2259	2260	2261	2262	2263	2264	2265	2266	2267	2268	2269	2270	2271	2272	2273	2274	2275	2276	2277	2278	2279	2280	2281	2282	2283	2284	2285	2286	2287	2288	2289	2290	2291	2292	2293	2294	2295	2296	2297	2298	2299	2300	2301	2302	2303	2304	2305	2306	2307	2308	2309	2310	2311	2312	2313	2314	2315	2316	2317	2318	2319	2320	2321	2322	2323	2324	2325	2326	2327	2328	2329	2330	2331	2332	2333	2334	2335	2336	2337	2338	2339	2340	2341	2342	2343	2344	2345	2346	2347	2348	2349	2350	2351	2352	2353	2354	2355	2356	2357	2358	2359	2360	2361	2362	2363	2364	2365	2366	2367	2368	2369	2370	2371	2372	2373	2374	2375	2376	2377	2378	2379	2380	2381	2382	2383	2384	2385	2386	2387	2388	2389	2390	2391	2392	2393	2394	2395	2396	2397	2398	2399	2400	2401	2402	2403	2404	2405	2406	2407	2408	2409	2410	2411	2412	2413	2414	2415	2416	2417	2418	2419	2420	2421	2422	2423	2424	2425	2426	2427	2428	2429	2430	2431	2432	2
--	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	---

FIG. 36

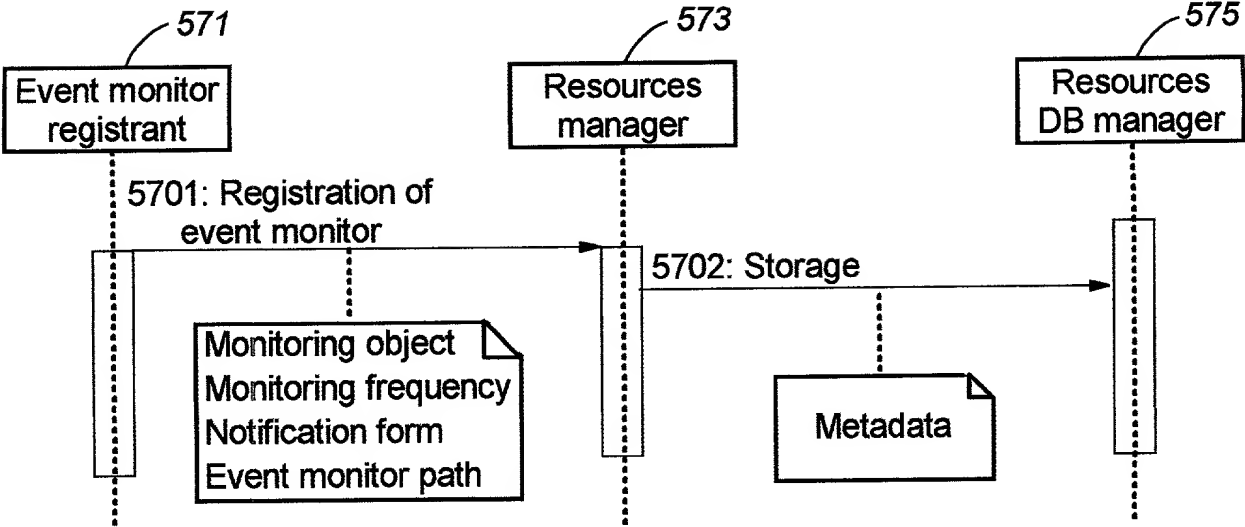


FIG. 37

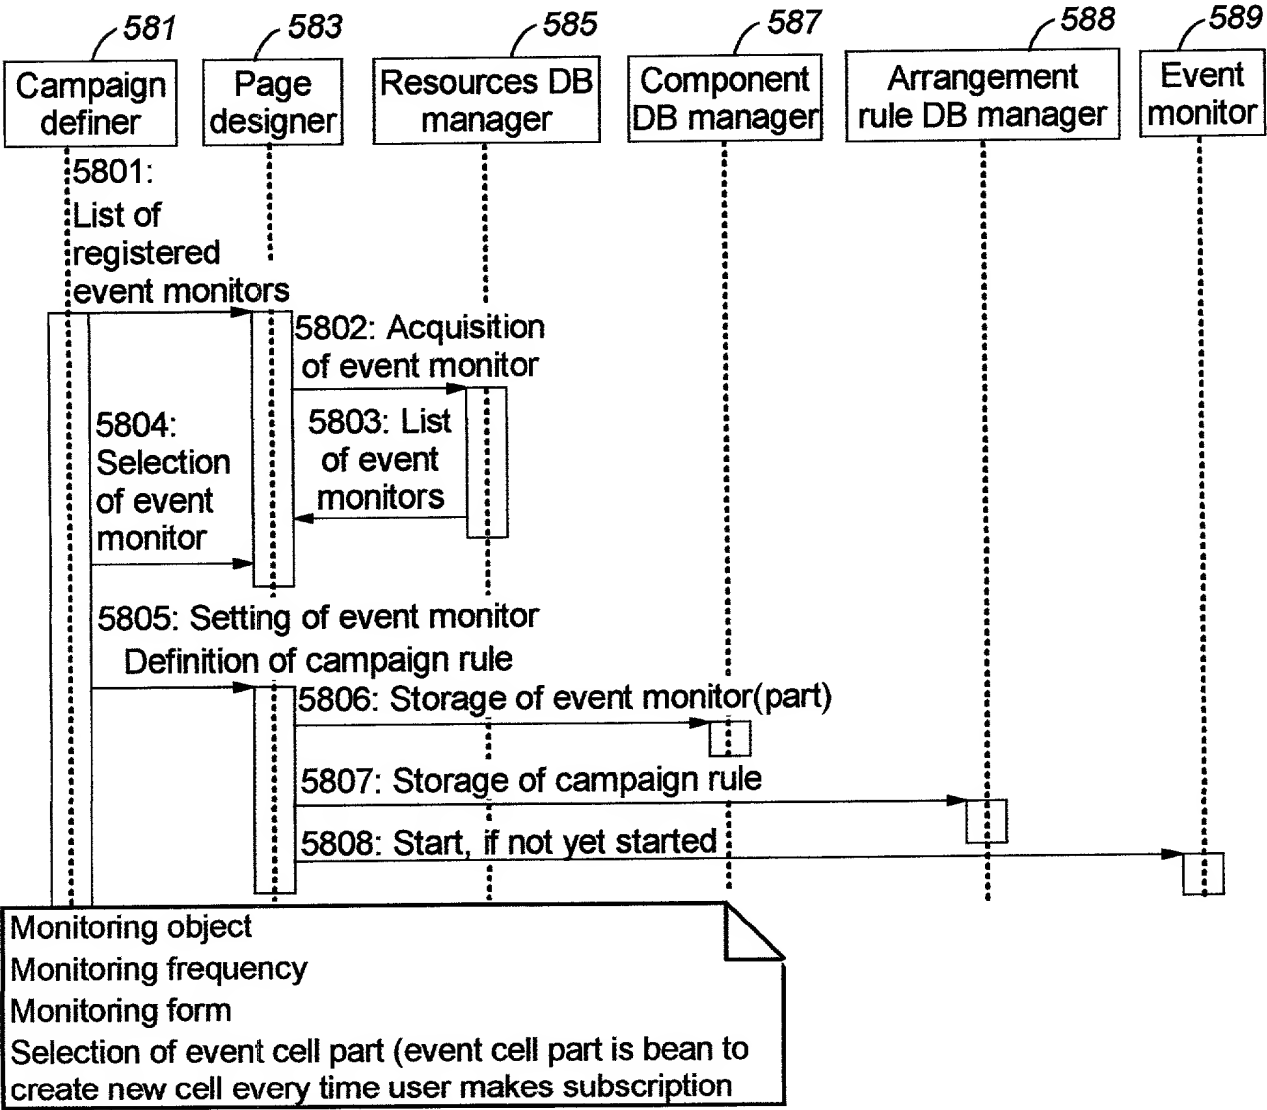


FIG. 38

731 Part type	721 Part ID	723 Part display area name	725 Page template ID	727 START	728 END	729 Publish	733 Event flag	735 Cell part ID
Banner	0001	product_ad	1001	1999-01-01 0:00	1999-07-01 0:00	1	1	2001
Banner	0002	product_ad	1002	1999-07-01 0:00	2000-01-01 0:00	1	1	2001
Telop	0003	product_inf	1003	1999-08-01 4:00	1999-09-20 23:00	0	0	2001
Event	0004						1	2003
.
.
.

720
Arrangement rule DB

FIG. 40

User ID	Cookie	E-mail address	User profile

720
User management DB


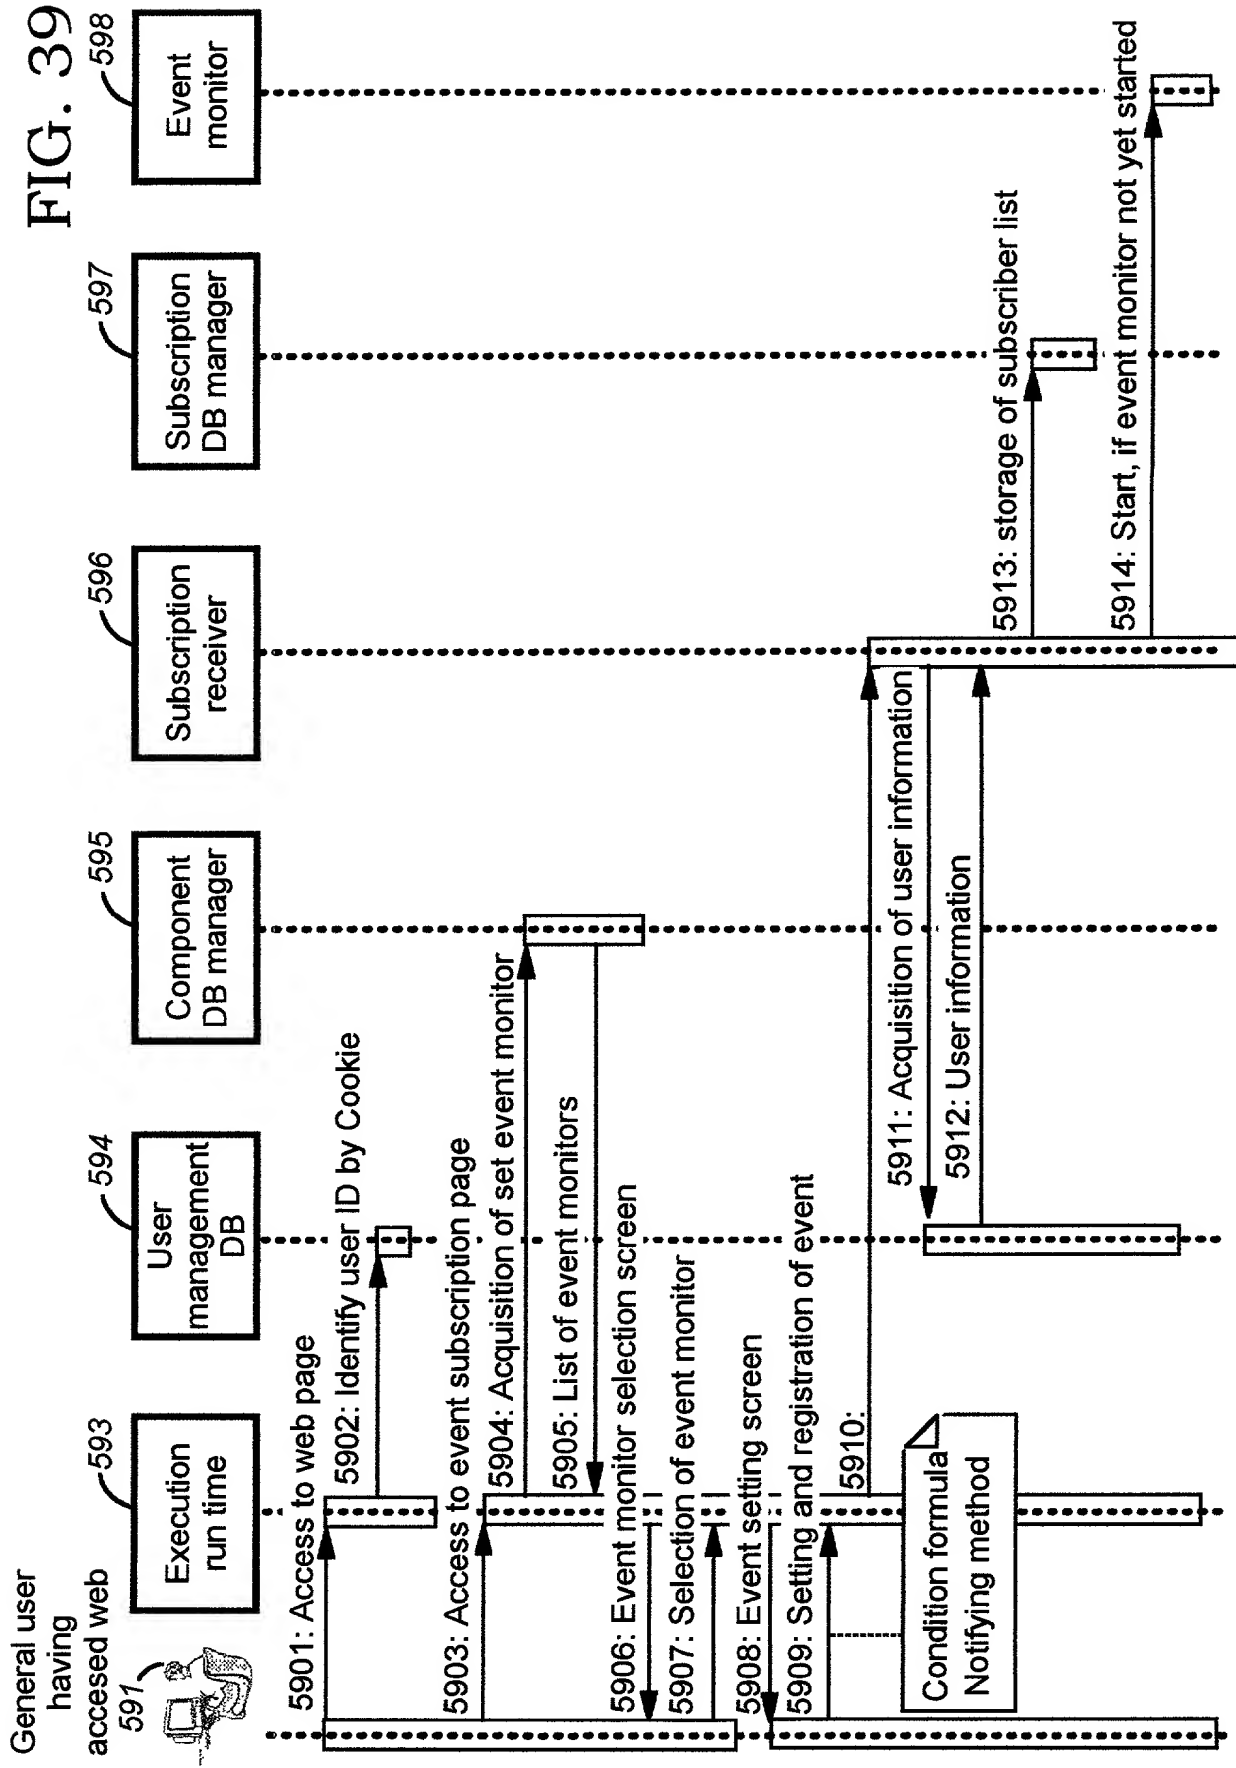


FIG. 41

Subscription ID	User ID	Part ID	Condition formula	Notification form	Campaign flag

750
Subscription DB

FIG. 42A

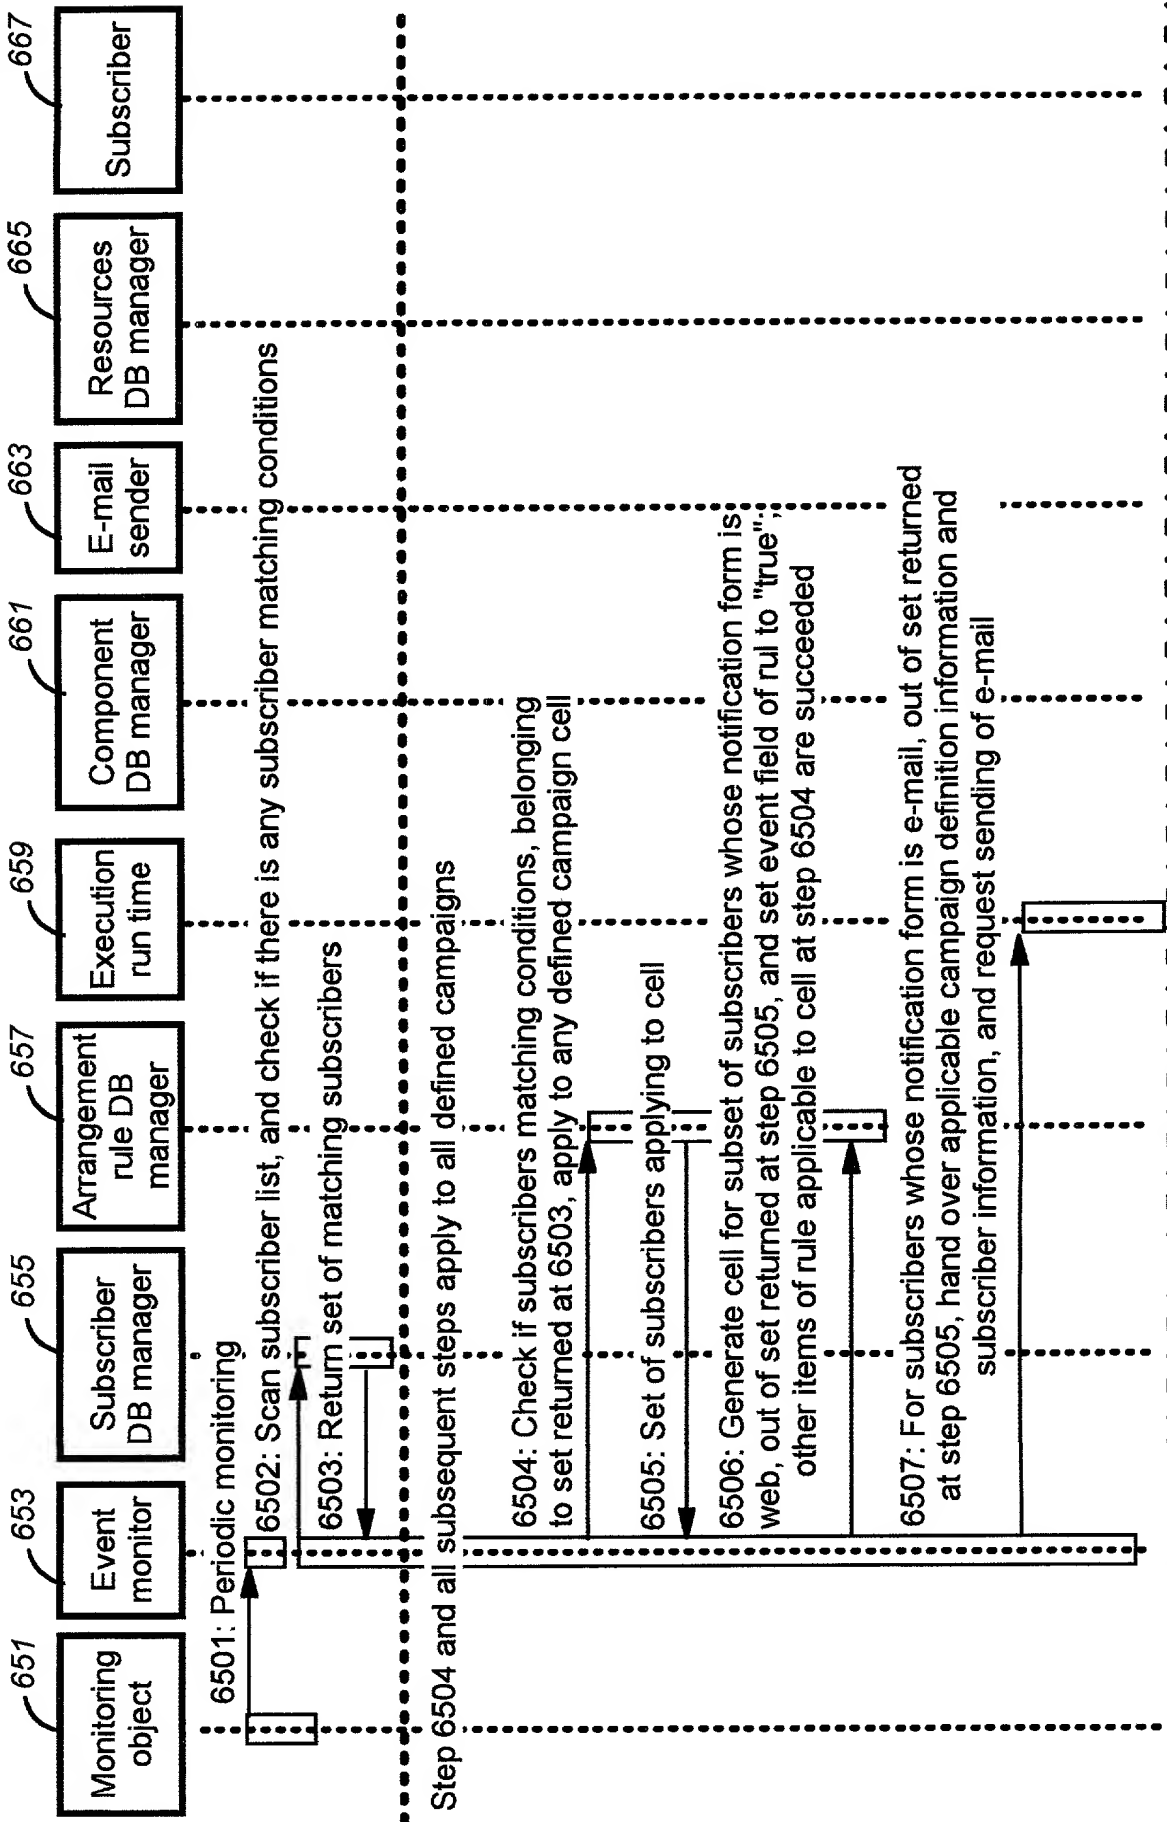

(To FIG. 42B)

FIG. 42B

(From FIG. 42A)

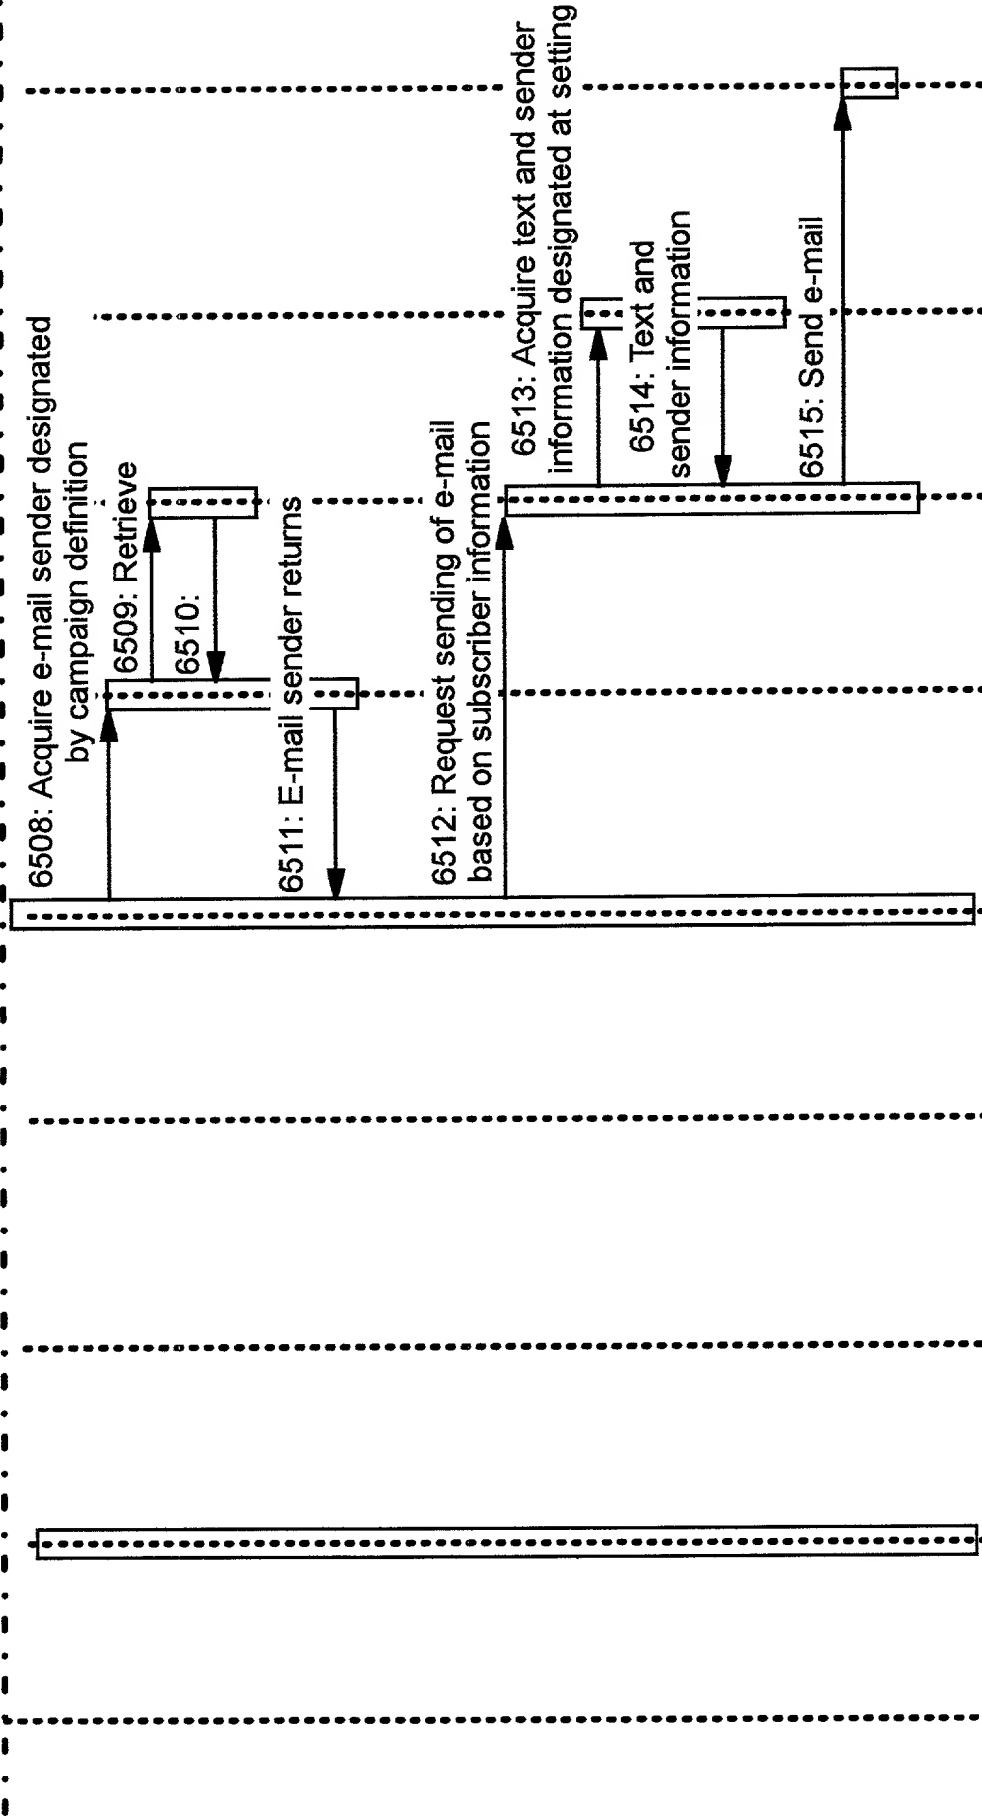


FIG. 43


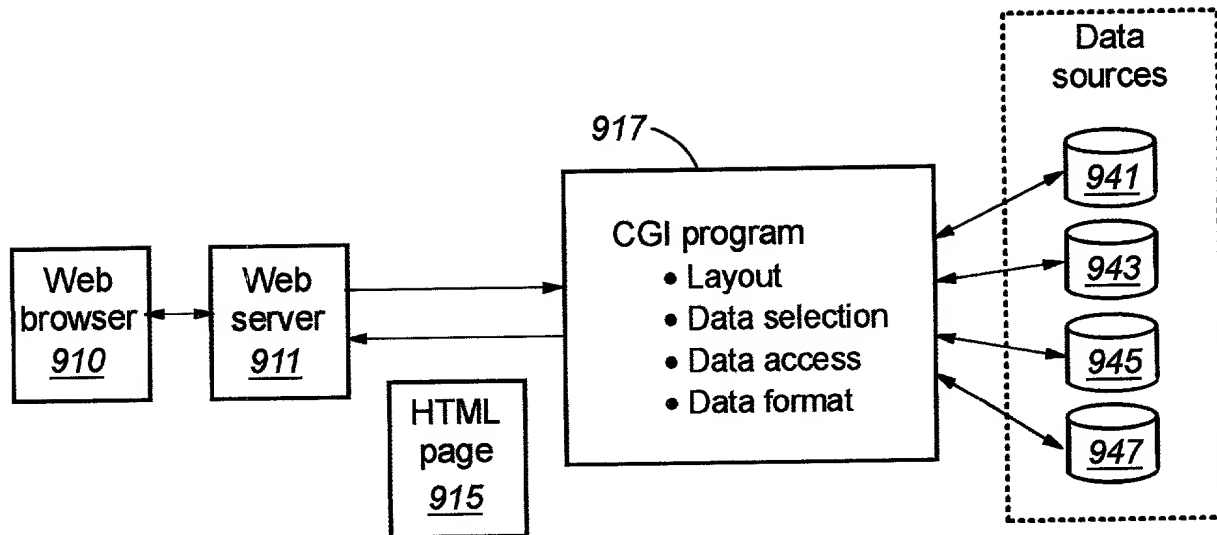


FIG. 44

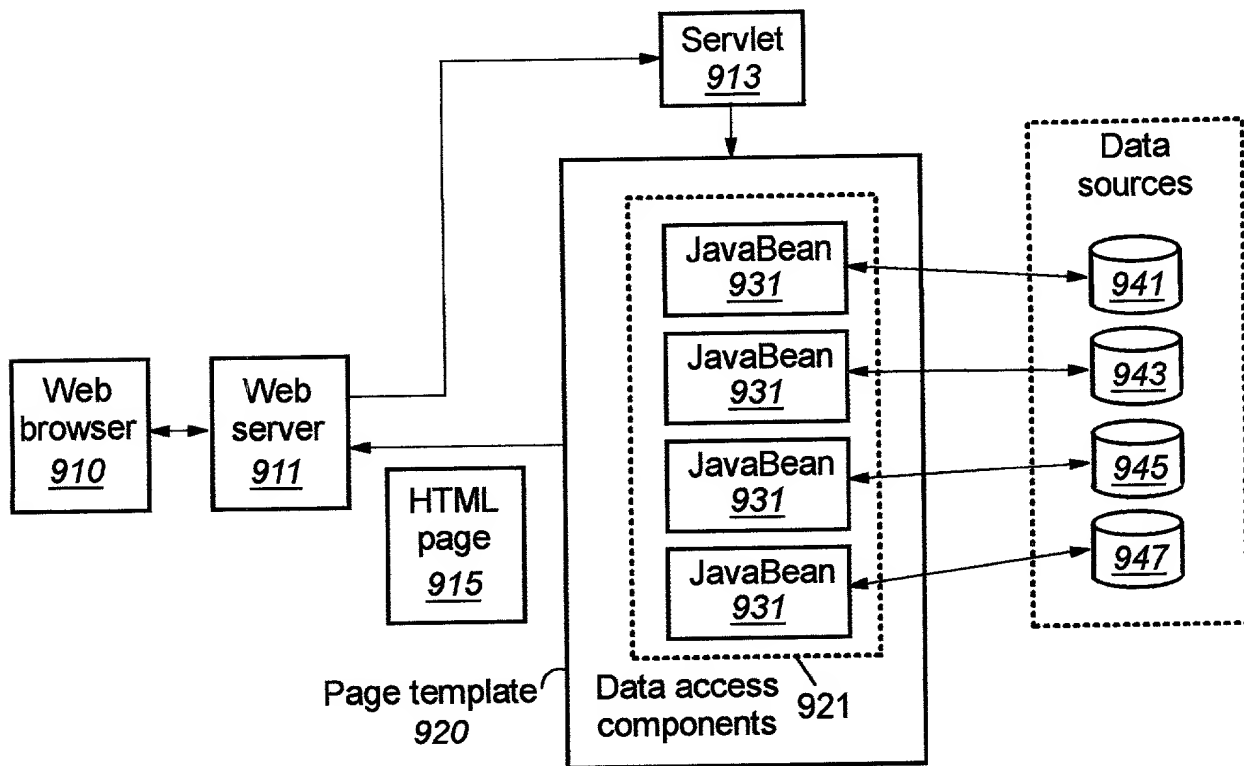

Declaration and Power of Attorney for Patent Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND APPARATUS FOR FIXING DISPLAY INFORMATION

the specification of which (check one)



is attached hereto.



was filed on _____ as Application Serial No. _____.

I hereby state that I have reviewed and understand the contents of the above- identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):			
Number	Country	Day/Month/Year	Priority Claimed
11-230537	Japan	17/08/99	Yes

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Applications:		
Serial No.	Filing Date	Status

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

A.B. Clay, Reg. No. 32,121; G. M. Doudnikoff, Reg. No. 32,847; E. H. Duffield, Reg. No. 25,970;
J. W. Herndon, Reg. No. 27,901; J. S. Ray-Yarletts, Reg. No. 39,808; Gerald R. Woods, Reg. No.
24,144

Send all correspondence to: A. Bruce Clay
IBM Corporation, Dept. T81/062
3039 Cornwallis Road
RTP, NC 27709
919-254-6717
FAX: 254-4330

(1) Inventor: **Koji Zettsu**

Signature:

Koji Zettsu

Date 2000/04/14

Residence: 2-2-3-401 Kameino, Fujisawa-shi
Kanagawa-ken
Japan

Citizenship: Japanese

Post Office
Address: Same

(2) Inventor: **Kazuhiro Minami**

Signature:

X Kazuhiro Minami

Date X 2000/05/02

Residence: #214 Sachem Village, West Lebanon
New Hampshire

Citizenship: Japanese

Post Office
Address: Same

(3) Inventor: **Hajime Tsuchitani**

Signature:

Hajime Tsuchitani

Date 2000/06/18

Residence: 1901-102 Dai, Kamakura-shi

Kanagawa-ken

Citizenship: Japanese

Post Office
Address: Same